


Installing SC Converter on Prodigy™ Connector


1 Locate SC converter and note the alignment key on the prodigy connector core and the alignment guide on the SC converter, which are used to guide the Prodigy connector core into the SC converter.

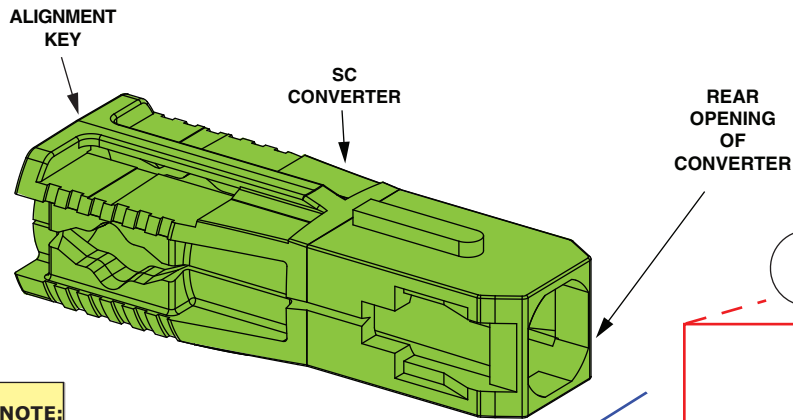

NOTE:

Work on a clean surface, taking care to avoid dust contamination of mating surfaces.


2 Install SC converter: (a) align alignment key on the Prodigy connector core with the alignment guide in the converter body (see detail), (b) insert connector core all the way in until it clicks into position as shown in (c).

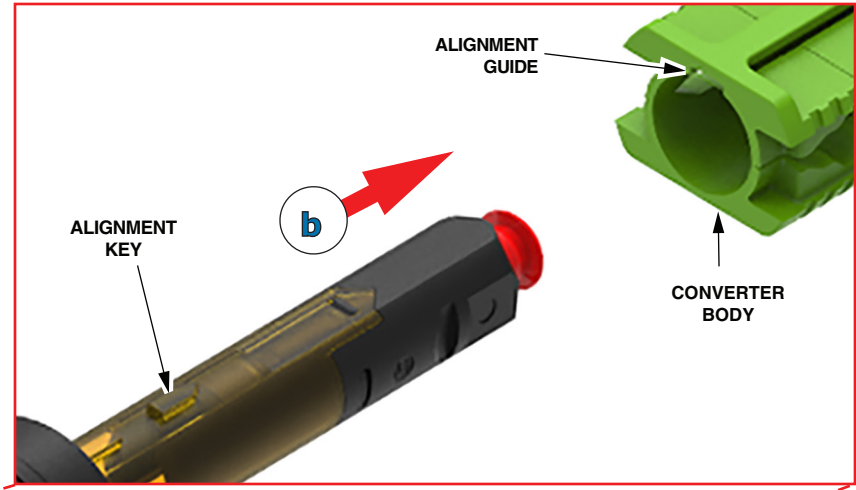

NOTE:


Hold converter body stationary while inserting connector core into rear opening of converter, as indicated in (a). Align Prodigy connector using alignment key and alignment guide as shown in Alignment Detail above.

3 Prior to installing Prodigy connector into adapter, remove ferrule dust cap, shown below.

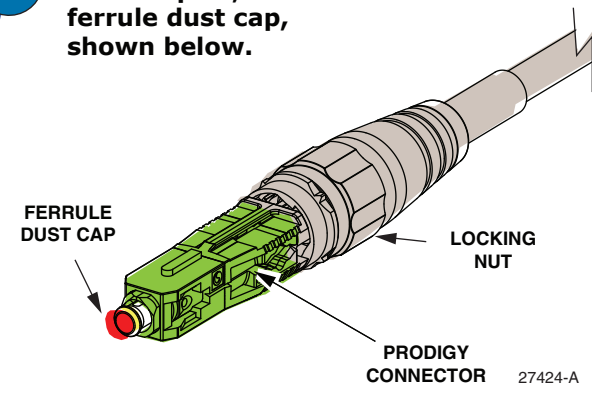


Removing SC Converter from Prodigy™ Connector

1 Remove SC converter as follows: (a) insert a flat screw driver or similar tool into break line on the SC converter, (b) rotate the tool to pry open the converter along the break line.

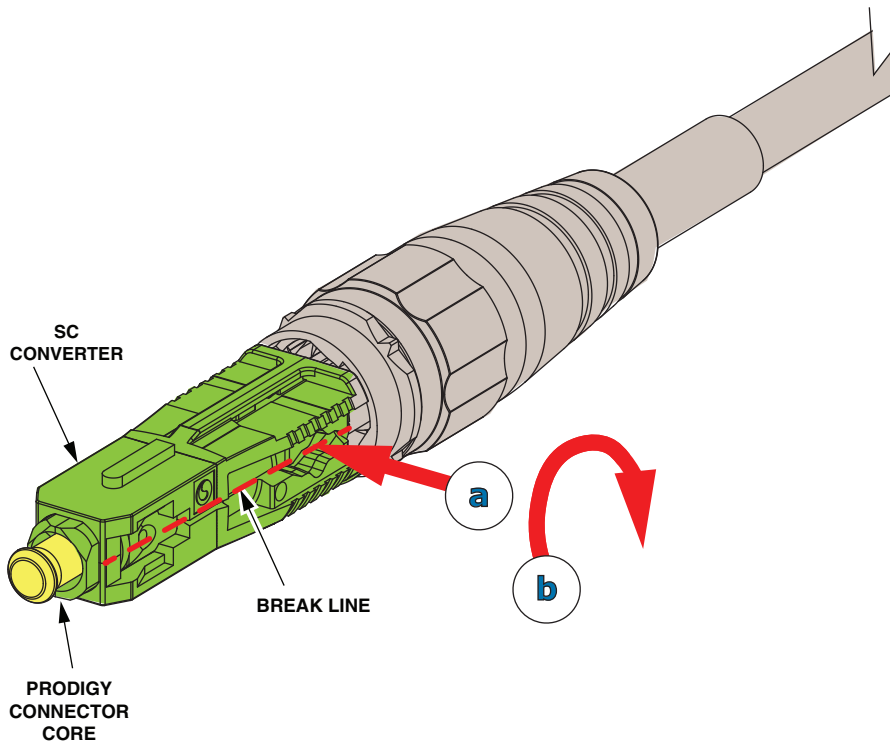

2 Remove the SC converter from the Prodigy connector core as follows: (a) lift off the separated converter halves from the Prodigy connector core; (b) discard the converter halves.

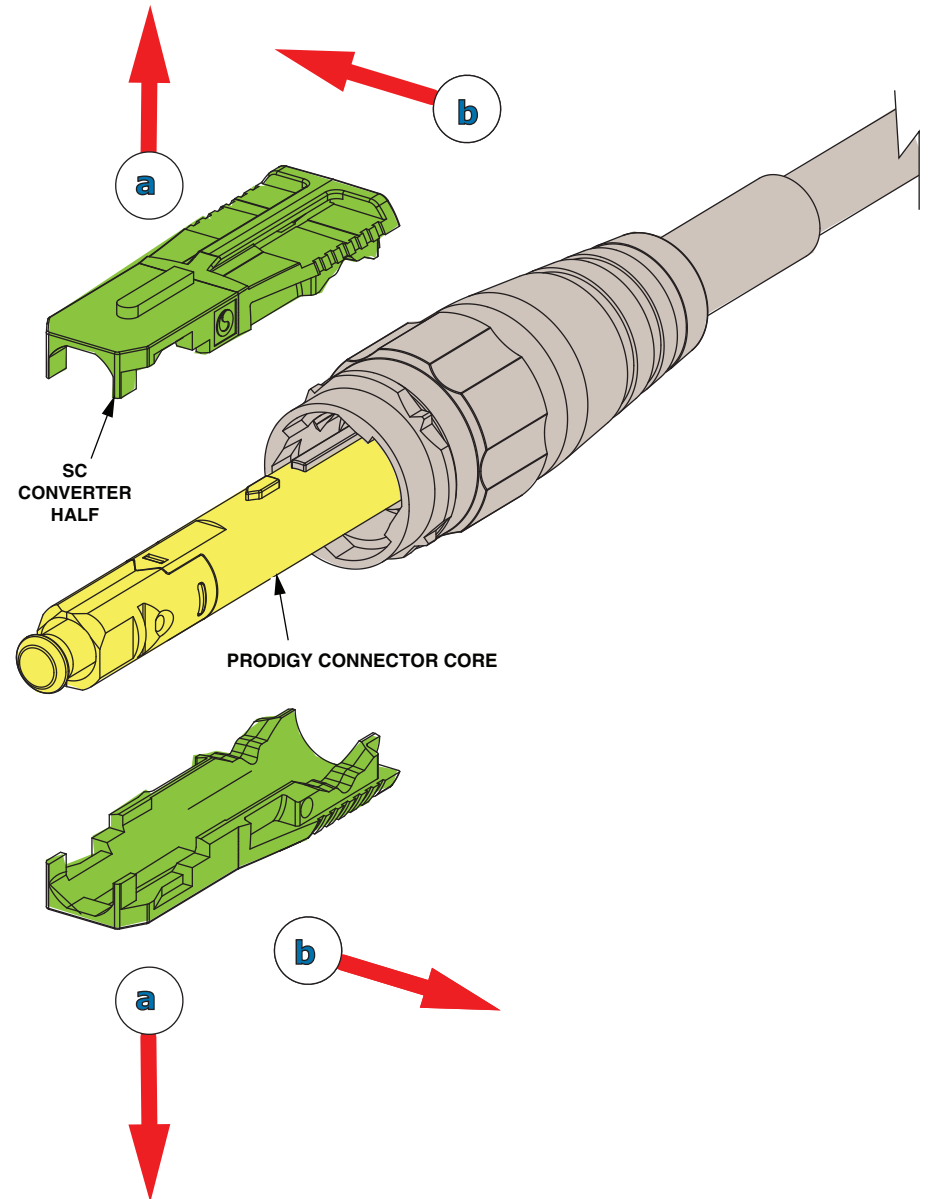

COMMSCOPE®

Use the QR code below to obtain product information



<https://www.commscope.com/product-type/cable-assemblies/fiber-cable-assemblies/fiber-drop-cable-assemblies/hca/>

Product Support: <http://www.commscope.com/SupportCenter>

Product Patent: <http://www.cs-pat.com>