


## Base Product



## RealFlex® 3 Fiber Optic Drop Cable Assembly for indoor/outdoor applications

- Allow for a fiber bend radius as small as 7.5 millimeters without changing attenuation characteristics, and improve the insertion loss (IL) performance for 90-degree bend locations
- Indoor/outdoor cable available in both riser and plenum cable types for use in residential, business or MDU (multiple dwelling unit) structures
- Cables can also be stapled, (using CommScope-approved staplers and staples), allowing fast and easy securing of cables to most surfaces
- Rugged 3-millimeter cable construction provides the flexibility and durability to withstand the most demanding applications

## Product Classification

<b>Regional Availability</b>	Asia   Latin America   North America
<b>Product Type</b>	Fiber drop cable assembly
<b>Product Brand</b>	RealFlex®
<b>Product Series</b>	MDC
<b>Ordering Note</b>	Lengths 1-350 ft are coiled. Lengths 351 ft + are spooled. Lengths under 351' that require a spool will need to include a spool option J at the end of the MID. When "J" option is included in the MID then Connector A will deploy first.

## General Specifications


<b>Cable Type</b>	Stapleable - Round
<b>Jacket Color</b>	Ivory
<b>Total Fibers, quantity</b>	1

## Dimensions

<b>Cable Outer Diameter</b>	2.9 mm (0.11 in)
-----------------------------	------------------

## Ordering Tree

# MDC

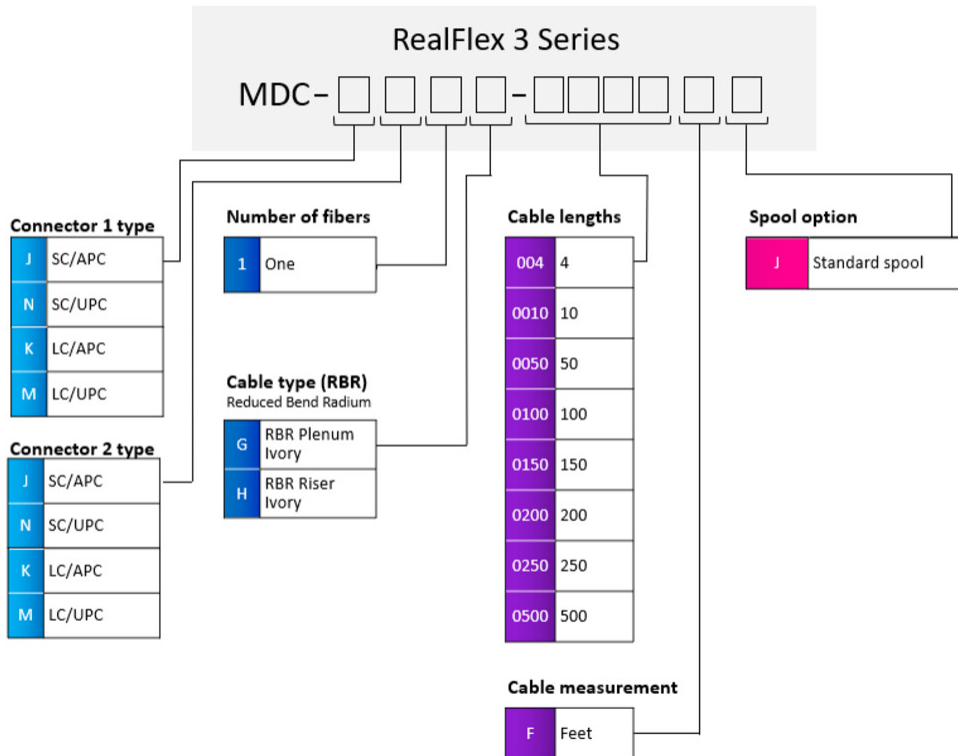

\* Cable length shown as an example; additional cable lengths available upon request up to 2,000

## Optical Specifications

**Fiber Mode** Singlemode  
**Fiber Type** G.657.A2/B2

## Environmental Specifications

**Installation temperature** -20 °C to -60 °C (-4 °F to -76 °F)  
**Operating Temperature** -40 °C to +70 °C (-40 °F to +158 °F)  
**Storage Temperature** -40 °C to +75 °C (-40 °F to +167 °F)  
**Environmental Space** Indoor/Outdoor | Plenum | Riser  
**Jacket UV Resistance** UV stabilized  
**Qualification Standards** Telcordia GR-20-CORE | Telcordia GR-409

## Packaging and Weights

**Cable weight** 7.9 kg/km | 5.309 lb/kft