

NG4-MON-MOD

Base Product



NG4access Monitoring Module

Singlemode Monitor VAMs are used for non-intrusive monitoring and testing of fiber optic network signals. VAM modules provide a wide range of tap ratios to accommodate specific application requirements. The ability to easily monitor both directions at a single point greatly reduces the time necessary to analyze traffic patterns, locate failures, and monitor signal degradation. NG4access Monitor VAMs occupy one access tray in the universal chassis and easily snap into place. The NG4access universal chassis holds up to 12 left and 12 right orientation VAMs.

Multimode Monitor VAMs are used for non-intrusive monitoring and testing of fiber optic network signals. VAM modules provide a wide range of tap ratios to accommodate specific application requirements. The ability to easily monitor both directions at a single point greatly reduces the time necessary to analyze traffic patterns, locate failures, and monitor signal degradation. NG4access Monitor VAMs occupy one access tray in the universal chassis and easily snap into place. The NG4access universal chassis holds up to 12 left and 12 right orientation VAMs. Multimode Monitor VAMs work at data rates of 10Gbps and lower.

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	CommScope®
Product Type	Monitoring module
Product Brand	NG4access®
Product Series	NG4
Warranty	For more information, please consult our Product Warranty guidelines

General Specifications

Device Type	Plug-and-play module
Access	Front
Application	For use with NG4 access frames
Distribution Type	1 x 2 splitter
Interface, front	LC/APC LC/UPC
Interface, Input	LC/APC LC/UPC
Interface, Output	LC/APC LC/UPC



NG4-MON-MOD

Tray Orientation Left orientation | Right orientation

Dimensions

Height	13.21 mm 0.52 in
Width	159.77 mm 6.29 in
Depth	130.3 mm 5.13 in

Ordering Tree

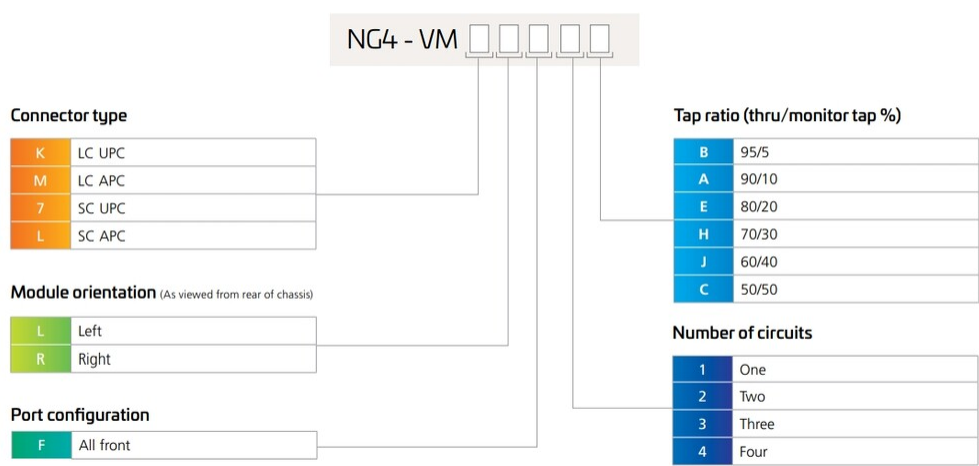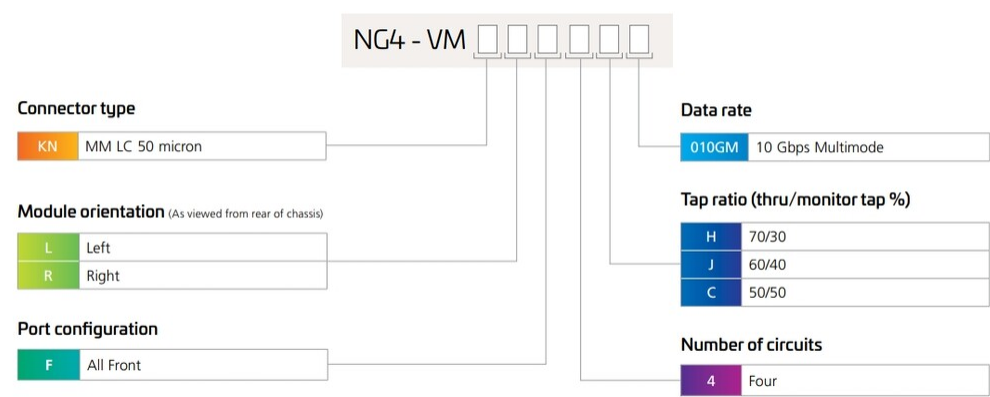

Packaging and Weights

Packaging quantity 1

* Footnotes

Warranty For more information, please consult our Product Warranty guidelines

