


# B-CN

---



Fiber Optic Cable, Outdoor Micro Cable for Air-blown installation, Central Tube All-Dielectric


## Product Classification

<b>Regional Availability</b>	Europe
<b>Portfolio</b>	CommScope®
<b>Product Type</b>	Fiber OSP cable
<b>Product Series</b>	B-CN

## General Specifications

<b>Cable Type</b>	Microcable
<b>Construction Type</b>	Non-armored
<b>Subunit Type</b>	Gel-filled

## Representative Image

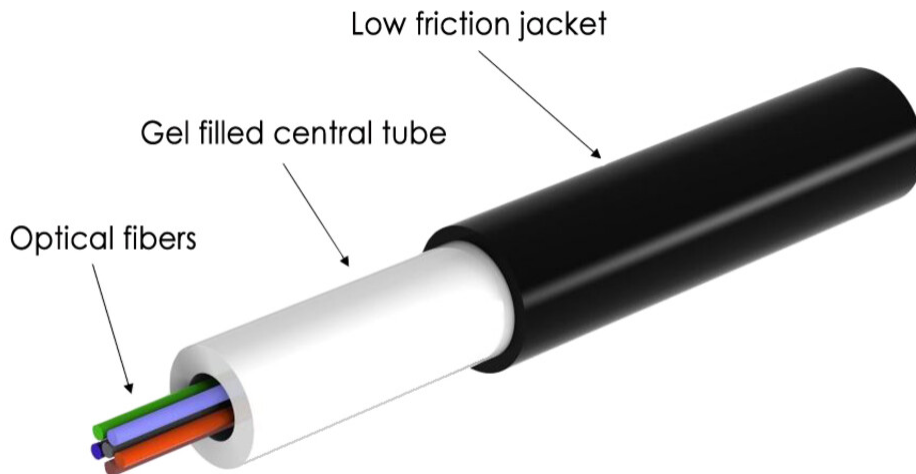

## Environmental Specifications

<b>Installation temperature</b>	-10 °C to +60 °C (+14 °F to +140 °F)
---------------------------------	--------------------------------------

# B-CN

---

<b>Operating Temperature</b>	-20 °C to +60 °C (-4 °F to +140 °F)
<b>Storage Temperature</b>	-20 °C to +60 °C (-4 °F to +140 °F)
<b>Cable Qualification Standards</b>	IEC 60794-1-2
<b>Environmental Space</b>	Air-blown, microduct
<b>Jacket UV Resistance</b>	UV stabilized

## \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable