


Optical Node Series (NC)

NC4000H4

1.2 GHz Fiber Deep Node

FEATURES

- 60 dBmV (virtual analog) high output at 1.2 GHz via GaN technology for Fiber Deep applications
- Drop-in upgrade for the NC4000HG range of Fiber Deep nodes
- Four RF outputs, two auxiliary ports for power or video, and two fiber ports
- Multiple forward/return frequency split options
- Uses automotive blade fuses and JXP pads and equalizers
- Superior upstream performance via advanced universal digital return modules
- Integrated, all-digital node status monitoring
- Redundant power supply option
- Strand or pedestal mounting

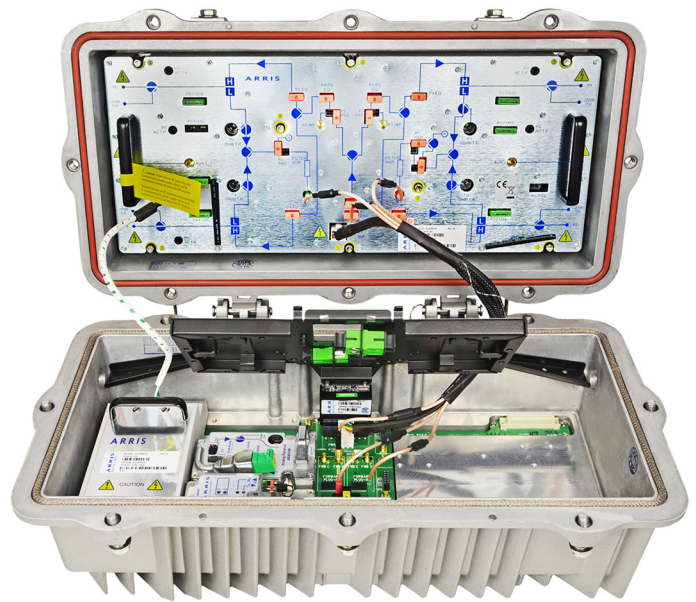

PRODUCT OVERVIEW

The ARRIS 1.2 GHz NC4000H4 series node is designed to provide the utmost reliability, flexibility, and adaptability in an outdoor optical node platform and is ideal for Fiber Deep applications.

The NC4000H4 node has a high output level of up to 54 dBmV (60 dBmV virtual analog) at 1218 MHz available on all four RF output ports of the OA4324HE RF Output Amplifier. It is designed as a “drop-in” replacement for the NC4000HG range of Fiber Deep nodes with an output level of 57 dBmV to extend the frequency range of the coax distribution network in Fiber Deep architectures. The standard or high gain optical receivers feature optical automatic level control and support optical inputs between -7 and +2 dBm.

The flexible and rugged platform is segmentable in the return path. This is achieved using the DT4250 universal digital return transceiver supporting multiple modes of operation, a single return ("1-fer"), dual independent returns ("2-fer") or enhanced single return with increased performance and the option to cascade returns. Upstream transmission is enabled with plug-in SFP modules supporting 1310 nm, 1550 nm, and CWDM or DWDM options further expanding the deployment of advanced "bandwidth-hungry" services into fiber-poor areas while reducing real estate and powering requirements in the field.

The NC4000H4 supports deployment of a wide range of field-hardened EDFAs and optical switches for extending fiber reach, routing options, and system reliability. Integrated remote monitoring is provided through the digital return transceiver with remote network management capability eliminating the added cost of a third-party status monitoring transponder.

The NC4000H4 optical node platform also supports next-generation architectures and technologies such as Node PON, Remote PHY, and more, providing a seamless migration to support tomorrow's services.

SPECIFICATIONS

| Characteristics | Specification | |
|--|--|---|
| Physical | | |
| Dimensions | 20" L x 9.5" W x 10.75" H (50.8 cm x 24.1 cm x 27.3 cm) | |
| Weight | 38 lbs (17.1 kg) | |
| Housing Ports | 4 AC/RF ports, 2 AC Only Ports, and 2 fiber ports | |
| Environmental | | |
| Operating Temperature Range | -40° to +60°C (-40° to +140°F) | |
| Storage Temperature Range | -40° to +85°C (-40° to +185°F) | |
| Humidity | 5% to 95% non-condensing | |
| General | | |
| Passband Options | Return 5–45 MHz 5–60 MHz 5–65 MHz 5–85 MHz | Forward 54–1218 MHz 72–1218 MHz 85–1218 MHz 102–1218 MHz |
| RF Test Points (Forward and Return) | -20 dB | |
| Flatness | ± 1.25 dB | |
| Thermal Stability | ± 1.5 dB | |
| Output Return Loss (at the Node Output) | > 16 dB | |
| Optical Input Range | -7 to +2 dBm into AR4x14E receiver (ALC range) | |
| Power Requirements | | |
| Operating Input Voltage Range | 44 to 95 V _{RMS} (50–60 Hz Quasi-Square Wave) | |
| Power Passing ¹ | 15 A _{RMS} | |
| Power Supply Start-up Input Voltage | 38–42 V _{RMS} | |
| Power Supply Turn Off Input Voltage | 34–38 V _{RMS} | |
| Power Supply Efficiency | 83% typical (PS4101) 73% typical (PS4001) | |
| DC Power Consumption | <ul style="list-style-type: none"> 78 W (standard configuration of 4 RF outputs, 1 optical Rx, and 1 digital return Tx) 6 W (Return Transceiver, DT4250 with TR4000 SFP) 11.5 W (Forward Receiver, AR4x14E) | |
| RF Performance for HFC Applications² | | |
| Fiber Deep Application | | |
| Channel Loading | 102–1218 MHz | QAM + OFDM |
| Nominal Output Level (Per Port) | | |
| | at 1218 MHz | 54 dBmV QAM (60 dBmV analog) |
| | at 105 MHz | 33 dBmV QAM (39 dBmV analog) |
| | at 54 MHz | 32 dBmV QAM (38 dBmV analog) |
| Nominal Slope | 54/1218 | 22 dB linear |
| Link Performance ³ | | |
| | MER | > 40 dB |
| | BER | < 1x10 ⁻⁶ |

NOTES:


1. Maximum current through any port.
2. Node performance only.
3. With total composite power of 21.05 dBm

ORDERING INFORMATION

A typical configuration of the NC4000H4 series optical node includes the NH4000-H housing with external test ports, one PS4101 power supply, one 51-1218 MHz optical receiver module (AR4x14E) with SC/APC connectors, the OA4324HE 4-port RF amplifier module, and JXP equalizers and pads. A backup PS4101 power supply may be separately ordered. Also available are additional optional plug-in modules that are described on separate data sheets; FA4500 series Optical Amplifiers, DT4250 Universal Digital Return Transceivers, optical or RF redundancy switches, and return ingress switch options. Please contact your ARRIS sales representative for information regarding specific equipment configuration options to meet your requirements.

RELATED PRODUCTS

| | |
|----------------------------|-----------------------|
| Digital Return Transmitter | Optical Patch Cords |
| SFPs | Optical Passives |
| Fiber Service Cable | Installation Services |

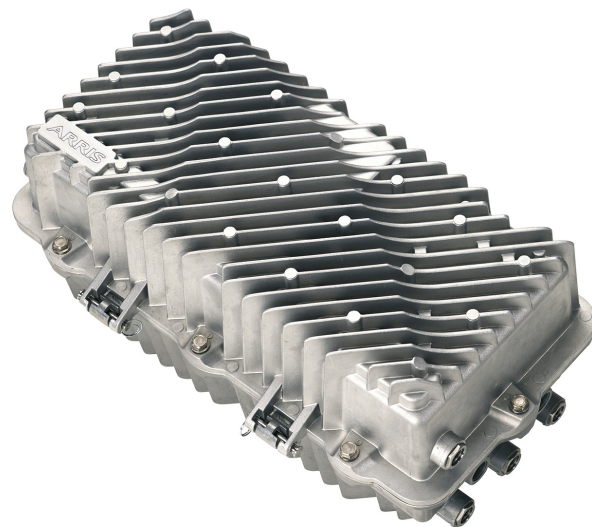

Customer Care

Contact Customer Care for product information and sales:

- United States: 866-36-ARRIS
- International: +1-678-473-5656

Note: Specifications are subject to change without notice.

Copyright Statement: © 2020 CommScope, Inc. All rights reserved. ARRIS and the ARRIS logo are trademarks of CommScope, Inc. and/or its affiliates. All other trademarks are the property of their respective owners. No part of this content may be reproduced in any form or by any means or used to make any derivative work (such as translation, transformation, or adaptation) without written permission from CommScope, Inc and/or its affiliates ("CommScope"). CommScope reserves the right to revise or change this content from time to time without obligation on the part of CommScope to provide notification of such revision or change.

87-11082_RevE_NC4000H4

10/2020 EA-32095

Ask us about the complete Access Technologies Solutions portfolio:

Nodes-NC