


N-DZ

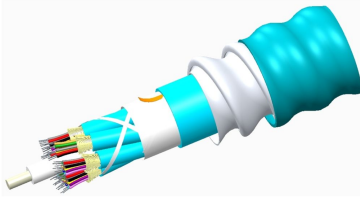

Fiber Optic Cable, Indoor Zero Halogen, Dual listed, Distribution Cable, Aluminum Interlocking Armored

- CommScope's indoor fiber cables are positioned for Data Center or Central Office applications
- Superior mechanical and optical performance with unmatched stability and quality
- Available cable jacket colors: aqua, lime-green, yellow

Product Classification


Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	CommScope®
Product Type	Fiber indoor cable
Product Series	N-DZ

General Specifications

Cable Type	Distribution
Construction Type	Armored
Subunit Type	Gel-free

Ordering Tree

N-DZ

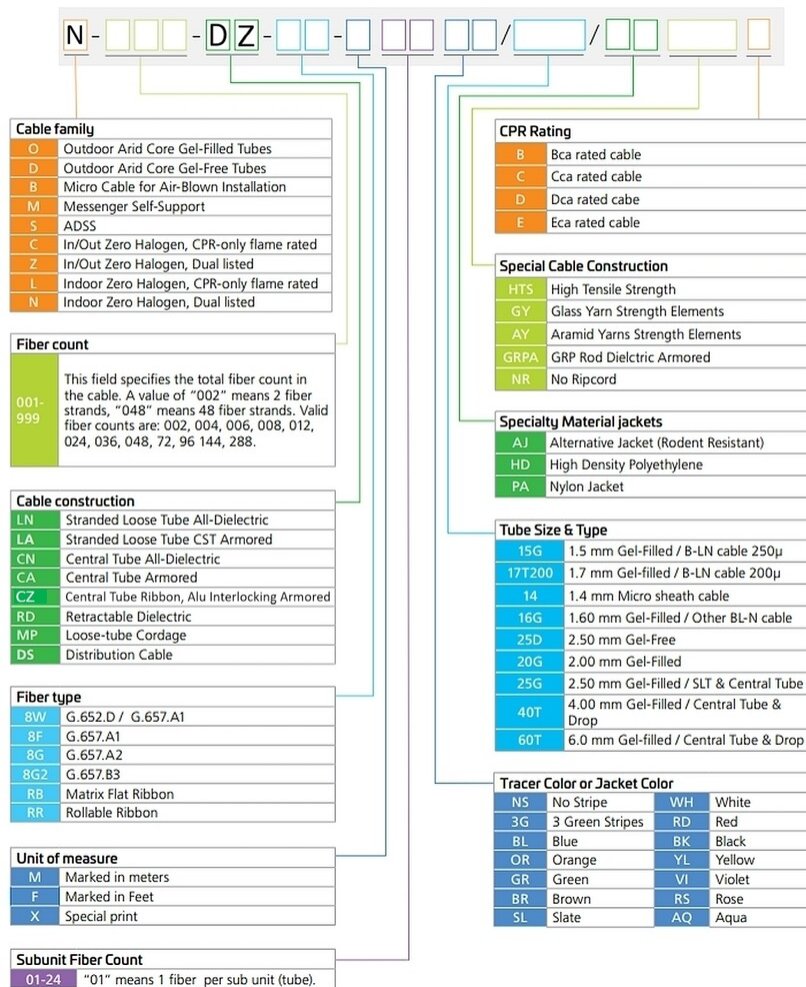

Environmental Specifications

Installation temperature	-10 °C to +60 °C (+14 °F to +140 °F)
Operating Temperature	-20 °C to +70 °C (-4 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Cable Qualification Standards	ANSI/ICEA S-83-596 Telcordia GR-409
Environmental Space	Low Smoke Zero Halogen (LSZH) Riser

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable