


# Z-DN

---

## Base Product



### Fiber Optic Cable, Drop, Indoor/Outdoor Zero Halogen, Dual listed, Dielectric

- Fiber drop cables are typically used between the fiber terminal and the building or home and available for various indoor or outdoor applications
- Fiber drop cables are engineered to withstand the most demanding environmental conditions, including sun, heat, cold, moisture and heavy RF interference
- Superior mechanical and optical performance with unmatched stability and quality

## Product Classification


<b>Regional Availability</b>	Asia   Australia/New Zealand   EMEA   Latin America   North America
<b>Portfolio</b>	CommScope®
<b>Product Type</b>	Fiber drop cable
<b>Product Series</b>	Z-DN

## General Specifications

<b>Cable Type</b>	Riser rated low smoke
<b>Construction Type</b>	Non-armored
<b>Subunit Type</b>	Gel-filled
<b>Jacket Color</b>	Black

## Ordering Tree

# Z-DN

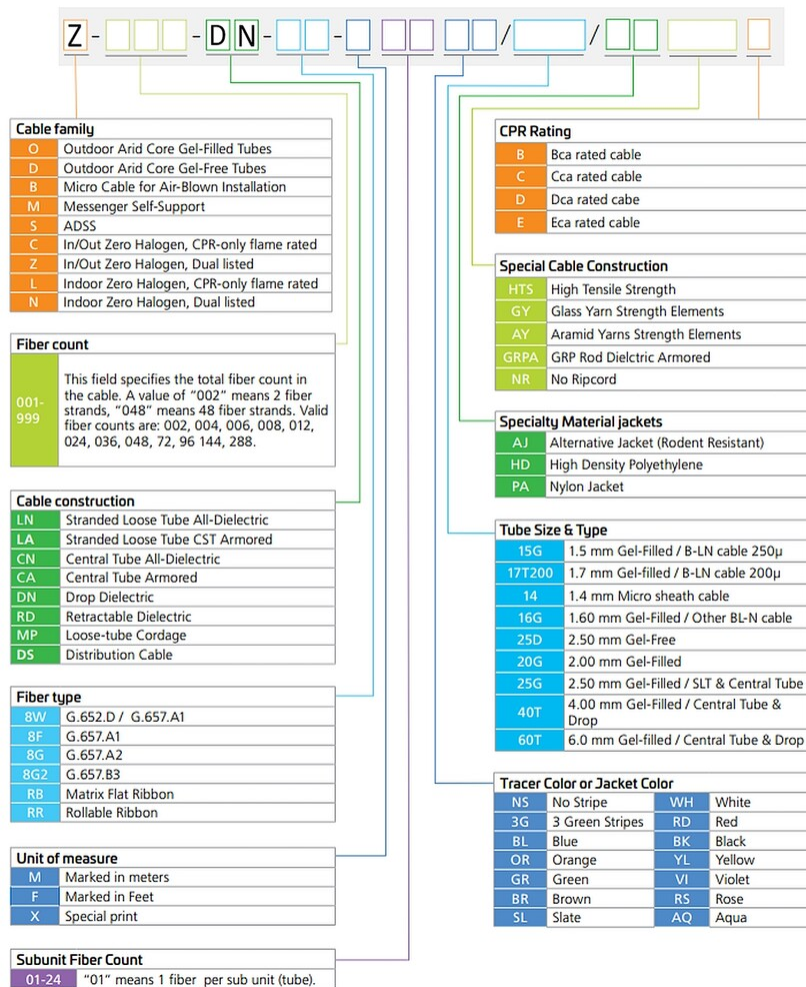

## Material Specifications

**Jacket Material** Low Smoke Zero Halogen (LSZH)

## Mechanical Specifications

**Strain** See long and short term tensile loads

## Environmental Specifications

**Installation temperature** -20 °C to +60 °C (-4 °F to +140 °F)

**Operating Temperature** -20 °C to +70 °C (-4 °F to +158 °F)

**Environmental Space** Aerial, lashed | Buried | Low Smoke Zero Halogen (LSZH) | Riser

**Jacket UV Resistance** UV stabilized

# Z-DN

---

## \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable