


N-MP

Fiber Optic Cable, Indoor Zero Halogen, Dual listed, Loose Tube Cordage




Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Product Type	Fiber indoor cable
Product Series	N-MP

General Specifications

Cable Type	Riser rated low smoke
Construction Type	Non-armored
Subunit Type	Gel-free

Representative Image

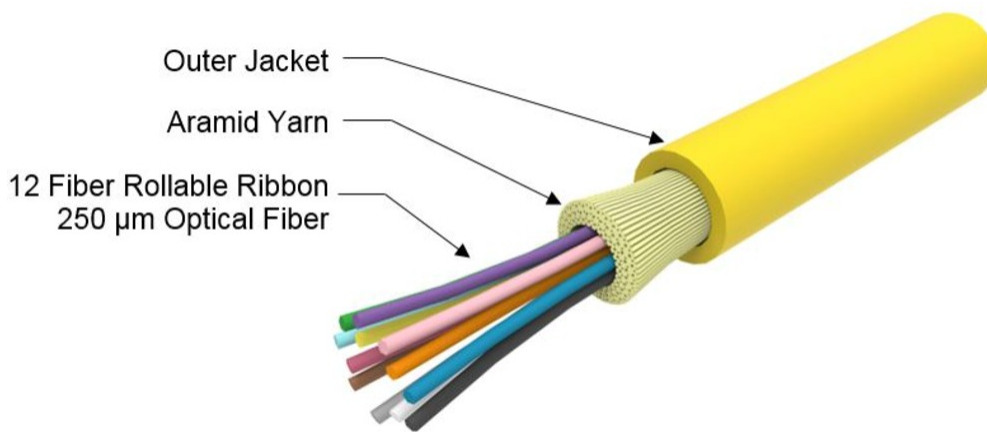

Environmental Specifications

Installation temperature	-30 °C to +60 °C (-22 °F to +140 °F)
---------------------------------	--------------------------------------

N-MP

Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Cable Qualification Standards	ANSI/ICEA S-104-696 Telcordia GR-409
Environmental Space	Low Smoke Zero Halogen (LSZH) Riser

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable