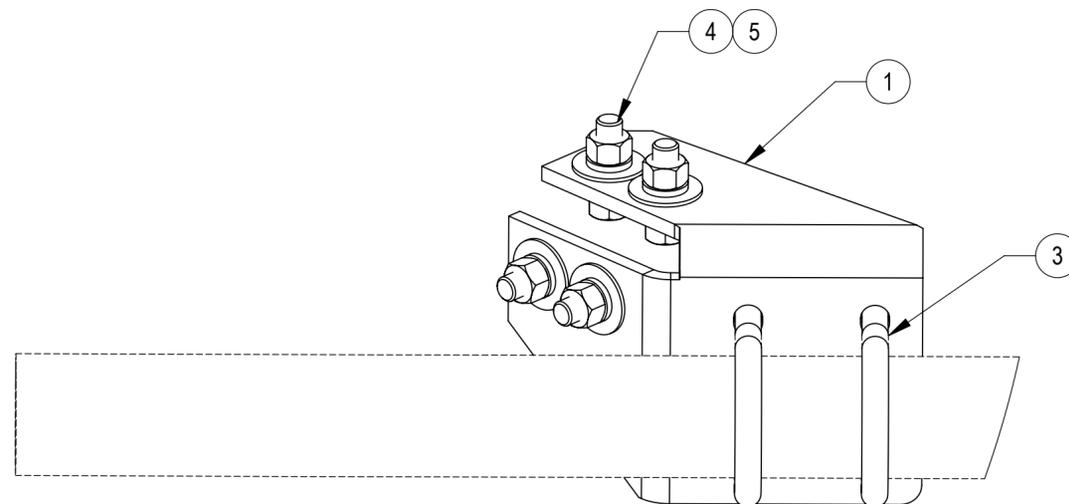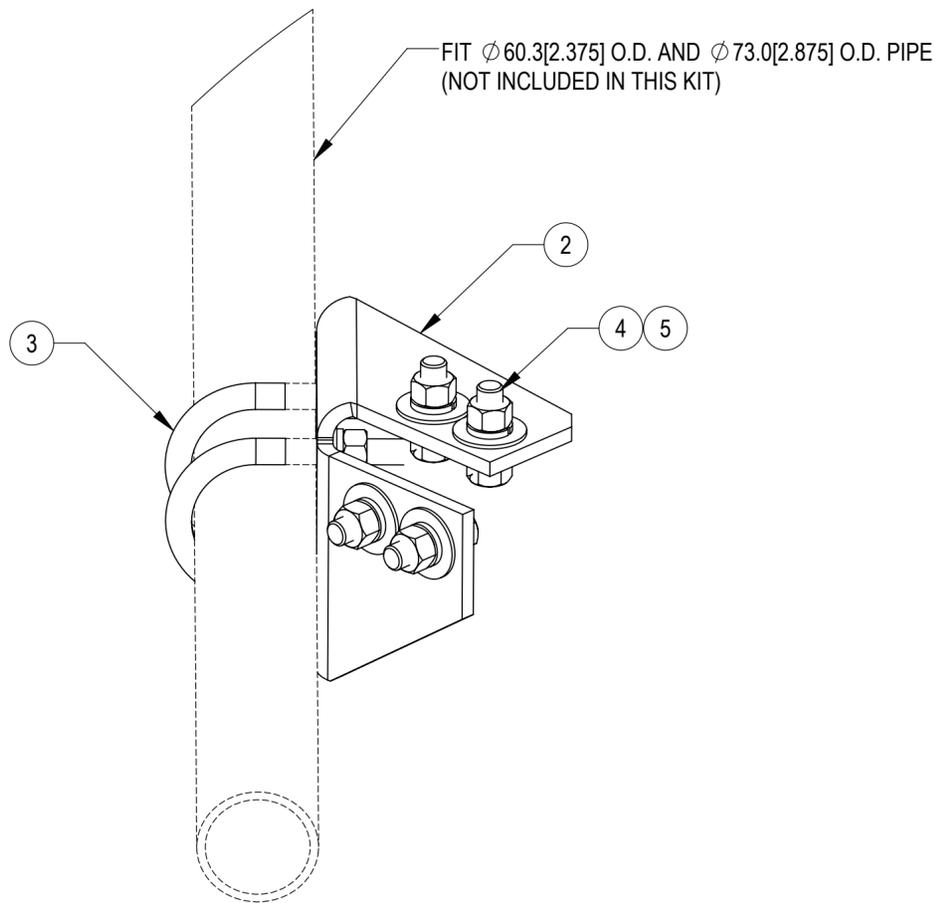**1.0 GENERAL NOTES**
  1.1 ALL IMPERIAL DIMENSIONS ARE IN BRACKETS [X.XX]
  1.2 MARK PART WITH IDENTIFICATION NUMBER
2.0 DESIGN NOTES
3.0 MANUFACTURING/SPECIAL REQUIREMENTS
  3.1 TIGHTEN ALL BOLTS SECURING FLAT PLATES BY THE TURN-OF-NUT METHOD. TIGHTEN ALL
    U-BOLTS USING TURN-OF-NUT METHOD WITH ATTENTION TO LEAVE EQUAL DISTANCE AND
    EQUAL FORCE ON EACH LEG OF THE U-BOLT.
4.0 TEST
5.0 PACKAGING
  5.1 PACKAGING SHALL MEET COMMSCOPE REQUIREMENTS PER DOCUMENT IS-PL-3005
  5.2 PRINTED DOCUMENT TO BE PLACED INSIDE POLYBAG AND THEN IN SHIPPING CONTAINER
  5.3 EXTRA HARDWARE MAYBE SUPPLIED, BAGGED AND SHIPPED

FIT ⌀60.3[2.375] O.D. AND ⌀73.0[2.875] O.D. PIPE
(NOT INCLUDED IN THIS KIT)

COMPONENT PART NUMBERS PROVIDED FOR ASSEMBLY PURPOSES;
INDIVIDUAL COMPONENTS MAY BE SHIPPED AS PARTS WITHIN AN INCLUDED KIT.

ITEM NO.	PART NO.	DESCRIPTION	QTY.	NOTE NO.
1	CBP4-L	CORNER BENT PLATE BRACKET, LH	1	
2	CBP4-R	CORNER BENT PLATE BRACKET, RH	1	
3	GUB-53050	5/8" X 3" X 5" GALV U-BOLT KIT	4	INCLUDES U-BOLT,FLAT WASHERS, LOCK WASHERS AND NUTS
4	GB-0520A	5/8" X 2" GALV BOLT KIT (A325)	8	INCLUDED BOLT, LOCK WASHER AND NUT
5	GWF-05	5/8" GALV FLAT WASHER, 1.7OD	8	

COMMSCOPE, INC. OF NORTH CAROLINA

TOLERANCES		SAP MATERIAL MASTER
0 PLACE X[.X] ± 6[0.25]	2 PLACE .XX[.XXX] ± 1.50[0.06]	**MUK-PLK4**
1 PLACE .X[.XX] ± 3.0[0.12]	ANGLES ± 2°	

FINISH | MATERIAL

DENSITY		lbs/in³
MASS	26.93	lbs
VOLUME	95.04	in³
SURFACE AREA	706.78	in²
DENSITY		g/mm³
MASS	12238.8770	grams
VOLUME	1557575.2452	mm³
SURFACE AREA	455988.8942	mm²
HEIGHT	(155[6.1])	
LENGTH	(249[9.8])	
WIDTH	(175[6.9])	

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MILLIMETERS
INTERPRET PER ANSI Y 14.5M-1994

	NAME	DATE	TITLE
CE	JL1183	16MAR23	
RW	JL1183	03/21/2023	**4-SIDED SUPPORT RAIL CORNER BRACKET**
AD	YW1045	03/23/2023	
RE	YMENG	03/24/2023	
ECN	40168212CMO		

SCALE **1:10** | DOCUMENT NO. **MUK-PLK4**

SIZE **A2**	Auth Group	INSL	MODEL			DRAWING			SHEET
			VERSION	STATUS	REVISION	VERSION	STATUS	REVISION	1 OF 1
			00	RE	A	00	RE	A	