

HELIAX® Hybrid Cable, UL Type TC-OF-ER

Product Classification

Regional Availability

Asia | Australia/New Zealand | EMEA | Latin America | North America

Portfolio

CommScope®

Product Type

Hybrid cable, copper and fiber

Product Brand

HELIAX®

General Specifications

Application

Remote radio head

Alarm Wire, quantity

6

Cable Type

Wireless feeder

Conductors, quantity

12

Construction Type

Shielded

Fiber Short Description

RFF – 6AWG

Fiber Type, quantity

32

Fibers per Subunit, quantity

16

Inner Shield (Tape) Material

Corrugated aluminum

Jacket Color

Black

Outer Shield (Tape) Material

PVC

Strength Members

Glass reinforced plastic rod

Subunit, quantity

2

Total Fiber Count

32

Water Blocking Method

Water blocking tape(s) | Water blocking threads

Dimensions


760185660 | HTC-32SM-1206-618-APV

Buffer Tube/Subunit Diameter	6.096 mm 0.24 in
Diameter Over Jacket	36.322 mm 1.43 in
Alarm Wire Gauge	18 AWG
Conductor Gauge	6 AWG

Electrical Specifications

dc Resistance Note	Maximum value based on a standard condition of 20 °C (68 °F)
dc Resistance, maximum	1.352 ohms/km 0.412 ohms/kft

Representative Image

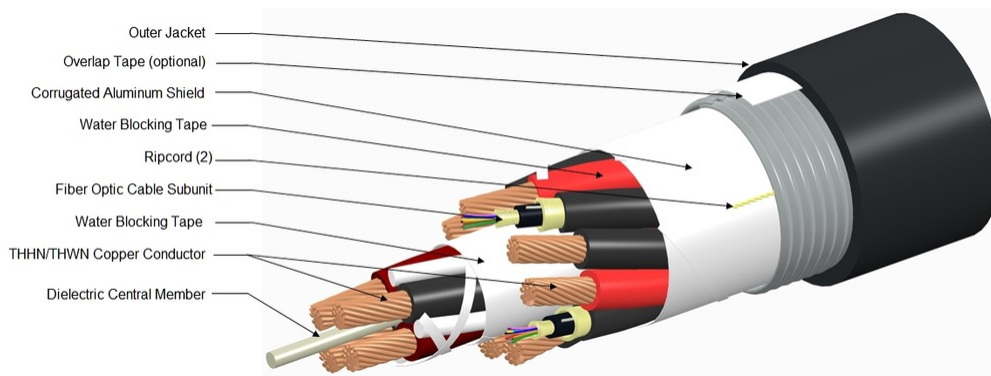

Material Specifications

Ripcord Material	Para-aramid synthetic fiber
-------------------------	-----------------------------

Mechanical Specifications

Minimum Bend Radius, multiple bends, loaded	723.9 mm 28.5 in
Minimum Bend Radius, multiple bends, unloaded	363.22 mm 14.3 in
Minimum Bend Radius, single bend, unloaded	254 mm 10 in
Tensile Load, long term, maximum	2,001.699 N 450 lbf
Tensile Load, short term, maximum	6,672.33 N 1500 lbf
Compression	4.465 kg/mm 250 lb/in
Compression Test Method	FOTP-41
Flex Test Method	FOTP-104
Impact	4.34 ft lb 5.884 N-m
Impact Test Method	FOTP-25
Twist	10 cycles

760185660 | HTC-32SM-1206-618-APV

Twist Test Method FOTP-85

Optical Specifications

Fiber Type G.657.A2/B2 | G.657.A2/B2

Environmental Specifications

Installation temperature -30 °C to +70 °C (-22 °F to +158 °F)

Operating Temperature -40 °C to +80 °C (-40 °F to +176 °F)

Storage Temperature -40 °C to +80 °C (-40 °F to +176 °F)

Cable Qualification Standards ANSI/ICEA S-104-696 | ANSI/ICEA S-87-640 | Telcordia GR-20 | Telcordia GR-409 | UL 1277

Environmental Space Wireless installation

Packaging and Weights

Cable weight 2,421.243 kg/km | 1627 lb/kft

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant



Included Products

CS-8G-MP	-	Enhanced Low Macrobending, Zero Water Peak, Dispersion-Unshifted Singlemode Fiber (ITU-T G.657.A2, B2)
----------	---	--

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable