


# UDVLCCLC21

## Base Product



Ultra Low Loss OM5, LC/UPC to LC/UPC, Fiber Patch Cord, 1.6 mm Simplex, Plenum

## Product Classification

Regional Availability	Asia   Australia/New Zealand   Europe   Latin America   Middle East /Africa   North America
Portfolio	CommScope®
Product Type	Fiber patch cord, simplex
Product Brand	SYSTIMAX ULL
Product Series	UDV
Ordering Note	For lengths greater than 999 ft (304 m), orders must be in meters   Minimum length may vary based on cable configuration

## General Specifications


Color, connector A	Beige
Color, connector B	Beige
Interface, Connector A	LC/UPC
Interface, Connector B	LC/UPC
Jacket Color	Lime green
Total Fibers, quantity	1

## Dimensions

Cable Assembly Length Range (m)	1 – 999
Cable Assembly Length Range (ft)	1 – 999
Diameter Over Jacket	1.6 mm   0.063 in

## Ordering Tree

# UDVLCCLC21

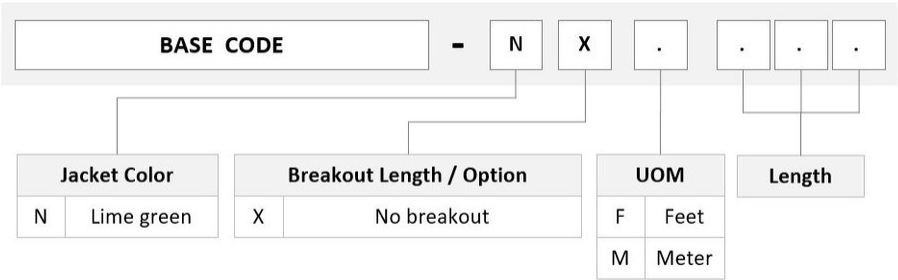

## Mechanical Specifications

**Cable Retention Strength, maximum** 11.24 lb @ 0 ° | 4.40 lb @ 90 °

## Optical Specifications

**Fiber Mode** Multimode  
**Fiber Type** OM5, LazrSPEED®

## Environmental Specifications

**Operating Temperature** -10 °C to +60 °C (+14 °F to +140 °F)  
**Environmental Space** Plenum


## Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



## Included Products

760238500	–	Fiber indoor cable, LazrSPEED® 1.6 mm Plenum Simplex, Multimode OM5, Feet jacket marking,
P-001-SP-5G-F16LM		Lime green jacket color
860637378	–	LazrSPEED® Elite LC Connector duplex for 1.6 mm Fiber, multimode

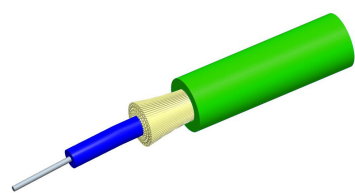

Fiber indoor cable, LazrSPEED® 1.6 mm Plenum Simplex, Multimode OM5, Feet jacket marking, Lime green jacket color

## Product Classification

Regional Availability	Asia   Australia/New Zealand   Latin America   Middle East/Africa   North America
Portfolio	CommScope®
Product Type	Fiber indoor cable
Product Series	P-SP


## General Specifications

Cable Type	Cordage
Construction Type	Non-armored
Subunit Type	Gel-free
Jacket Color	Lime green
Jacket Marking	Feet
Total Fiber Count	1

## Dimensions

Diameter Over Jacket	1.7 mm   0.067 in
----------------------	-------------------

## Representative Image

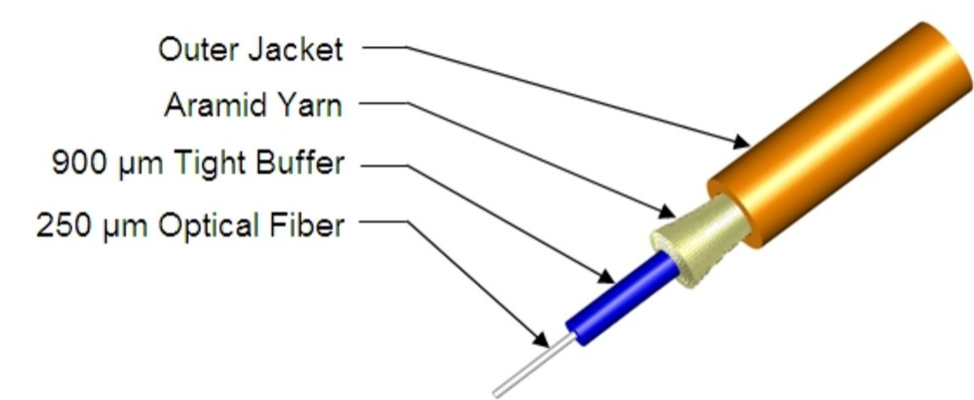

### Mechanical Specifications

Minimum Bend Radius, loaded	38 mm   1.496 in
Minimum Bend Radius, unloaded	15 mm   0.591 in
Tensile Load, long term, maximum	29 N   6.519 lbf
Tensile Load, short term, maximum	7 N   1.574 lbf
Compression	10 N/mm   57.101 lb/in
Compression Test Method	FOTP-41   IEC 60794-1 E3
Flex	300 cycles
Flex Test Method	FOTP-104   IEC 60794-1 E6
Impact	0.74 N-m   6.55 in lb
Impact Test Method	FOTP-25   IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33   IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85   IEC 60794-1 E7
Vertical Rise, maximum	500 m   1,640.42 ft

### Optical Specifications

Fiber Type	OM5, LazrSPEED® wideband   OM5, LazrSPEED® wideband
------------	---

### Environmental Specifications

# 760238500 | P-001-SP-5G-F16LM

Installation temperature	0 °C to +70 °C (+32 °F to +158 °F)
Operating Temperature	-20 °C to +70 °C (-4 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Cable Qualification Standards	ANSI/ICEA S-83-596   Telcordia GR-409
Environmental Space	Plenum
Flame Test Listing	NEC OFNP (ETL) and c(ETL)
Flame Test Method	NFPA 130   NFPA 262

## Environmental Test Specifications

Heat Age	-20 °C to +85 °C (-4 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	-20 °C to +70 °C (-4 °F to +158 °F)
Low High Bend Test Method	FOTP-37   IEC 60794-1 E11
Temperature Cycle	-20 °C to +70 °C (-4 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3   IEC 60794-1 F1

## Packaging and Weights

Cable weight	3 kg/km   2.016 lb/kft
--------------	------------------------

## Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant



## \* Footnotes

Operating Temperature	Specification applicable to non-terminated bulk fiber cable
-----------------------	---

LazrSPEED® Elite LC Connector duplex for 1.6 mm Fiber, multimode

Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America
Portfolio	CommScope®
Product Type	Fiber connector
Product Brand	LazrSPEED®

General Specifications

Body Style	Duplex
Color	Beige
Ferrule Geometry	Pre-radiused
Interface	LC/UPC

Dimensions

Length	50.3 mm   1.98 in
Compatible Cable Diameter	1.6 mm   0.063 in

Material Specifications

Ferrule Material	Zirconia
------------------	----------

Mechanical Specifications

Cable Retention Strength, maximum	11.24 lb @ 0 °
-----------------------------------	----------------

Optical Specifications

Fiber Mode	Multimode
Optical Components Standard	ANSI/TIA-568-C.3
Insertion Loss, ULL, maximum	0.15 dB
Return Loss, minimum	35 dB

Packaging and Weights

Packaging quantity	2
--------------------	---

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant

