

HPX4-71W/A



1.2 m | 4 ft High Performance Parabolic Shielded Antenna, dual-polarized,
7.125–8.500 GHz

Product Classification

Product Type Microwave antenna

General Specifications

Antenna Type HPX - High Performance Parabolic Shielded Antenna, dual-polarized
Diameter, nominal 1.2 m | 4 ft
Polarization Dual

Electrical Specifications

Beamwidth, Horizontal 2.2 °
Cross Polarization Discrimination (XPD) 30 dB
Electrical Compliance Brazil Anatel Class 2 | ETSI Class 2
Front-to-Back Ratio 62 dB
Gain, Low Band 36.0 dBi
Gain, Mid Band 36.7 dBi
Gain, Top Band 37.4 dBi
Operating Frequency Band 7.125 – 8.500 GHz
Radiation Pattern Envelope Reference (RPE) 1008A
Return Loss 20.8 dB
VSWR 1.20

Mechanical Specifications

Fine Azimuth Adjustment ±15°
Fine Elevation Adjustment ±20°
Mounting Pipe Diameter 115 mm | 4.5 in
Net Weight 69 kg | 152 lb
Side Struts, Included 1 inboard
Side Struts, Optional 1 inboard
Wind Velocity Operational 110 km/h | 68 mph

HPX4-71W/A


Wind Velocity Survival Rating

200 km/h | 125 mph


Wind Forces At Wind Velocity Survival Rating

Angle α for MT Max	-130 °
Axial Force (FA)	3158 N 710 lbf
Side Force (FS)	1546 N 348 lbf
Twisting Moment (MT)	1072 N-m 791 ft lb
Weight with 1/2 in (12 mm) Radial Ice	356 kg 784 lb
Zcg with 1/2 in (12 mm) Radial Ice	524 mm 21 in
Zcg without Ice	335 mm 13 in

Wind Forces At Wind Velocity Survival Rating Image

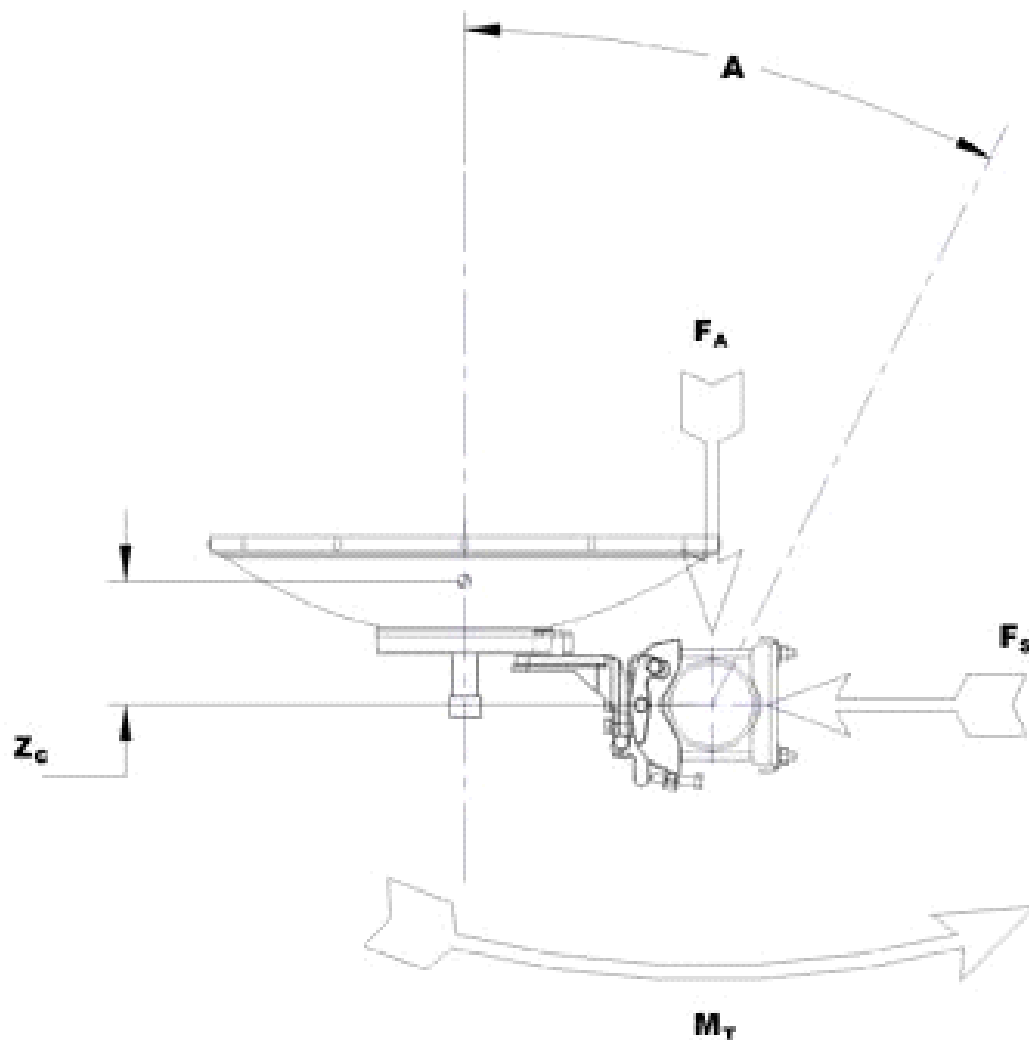

Antenna Dimensions And Mounting Information

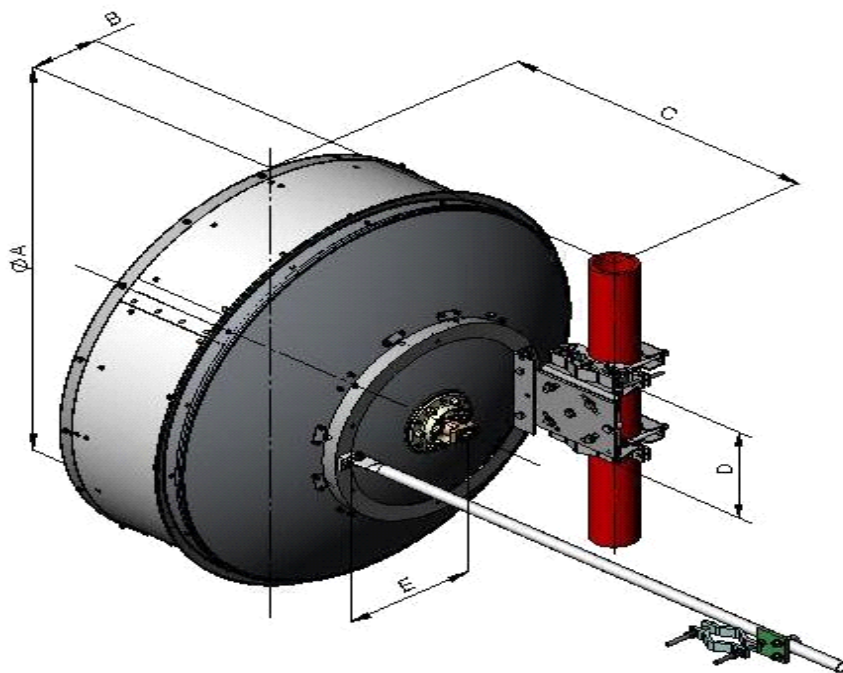

Dimensions in Inches (mm)					
Antenna Size, ft (m)	A	B	C	D	E
4 (1.2)	50.8 (1291)	15.0 (382)	29.5 (751)	12.2 (310)	11.6 (295)

Regulatory Compliance/Certifications

Agency

ISO 9001:2015

Classification

Designed, manufactured and/or distributed under this quality management system



* Footnotes

Axial Force (FA)

Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.

Cross Polarization Discrimination (XPD)

The difference between the peak of the co-polarized main beam and the maximum cross-polarized signal over an angle twice the 3 dB beamwidth of the co-polarized main beam.

Front-to-Back Ratio

Denotes highest radiation relative to the main beam, at $180^\circ \pm 40^\circ$, across the band.

	Production antennas do not exceed rated values by more than 2 dB unless stated otherwise.
Gain, Mid Band	For a given frequency band, gain is primarily a function of antenna size. The gain of Andrew antennas is determined by either gain by comparison or by computer integration of the measured antenna patterns.
Operating Frequency Band	Bands correspond with CCIR recommendations or common allocations used throughout the world. Other ranges can be accommodated on special order.
Radiation Pattern Envelope Reference (RPE)	Radiation patterns define an antenna's ability to discriminate against unwanted signals. Under still dry conditions, production antennas will not have any peak exceeding the current RPE by more than 3dB, maintaining an angular accuracy of +/-1° throughout
Return Loss	The figure that indicates the proportion of radio waves incident upon the antenna that are rejected as a ratio of those that are accepted.
Side Force (FS)	Maximum side force exerted on the mounting pipe as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.
Twisting Moment (MT)	Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.
VSWR	Maximum; is the guaranteed Peak Voltage-Standing-Wave-Ratio within the operating band.
Wind Velocity Operational	The wind speed where the antenna deflection is equal to or less than 0.1 degrees. In the case of ValuLine antennas, it is defined as a maximum deflection of 0.3 x the 3 dB beam width of the antenna.
Wind Velocity Survival Rating	The maximum wind speed the antenna, including mounts and radomes, where applicable, will withstand without permanent deformation. Realignment may be required. This wind speed is applicable to antenna with the specified amount of radial ice.