



UHF Male to UHF Female Right Angle Adapter

**OBSOLETE**

## Product Classification

**Product Type** Adapter


## General Specifications

**Interface** UHF Male  
**Interface 2** UHF Female  
**Body Style** Right angle  
**Mounting Angle** Right angle

## Electrical Specifications

**Connector Impedance** 50 ohm  
**Operating Frequency Band** 0 – 300 MHz  
**Average Power at Frequency** 300.0 W @ 900 MHz  
**dc Test Voltage** 2000 V  
**Outer Contact Resistance, maximum** 5.00 mOhm  
**Inner Contact Resistance, maximum** 5.00 mOhm  
**Insulation Resistance, minimum** 5000 MOhm

Outline Drawing

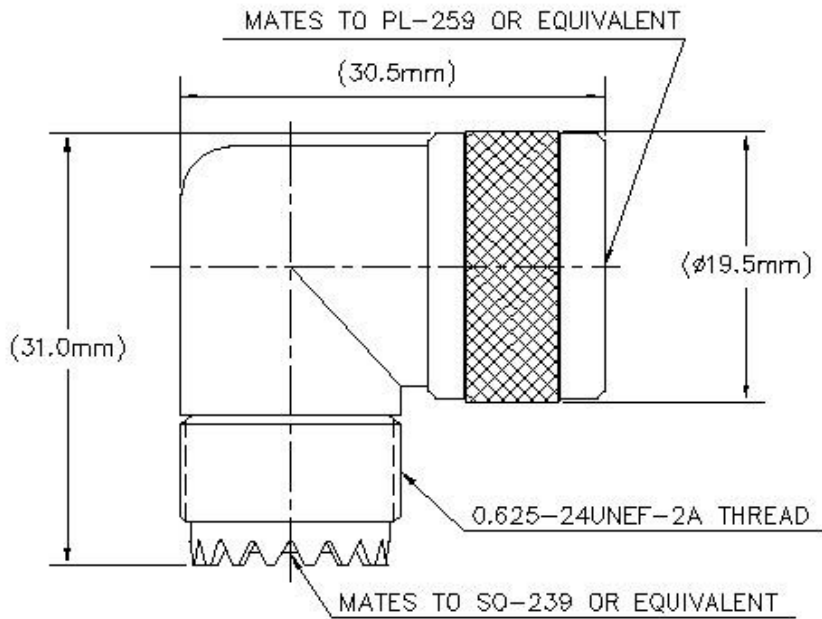

Mechanical Specifications

<b>Inner Contact Plating</b>	Silver
<b>Interface Durability</b>	500 cycles
<b>Interface Durability Method</b>	IEC 61169-12:9.5
<b>Outer Contact Plating</b>	Nickel
<b>Pressurizable</b>	No

Dimensions

<b>Diameter</b>	19.05 mm   0.75 in
<b>Length</b>	31.75 mm   1.25 in
<b>Weight</b>	36.00 g   0.08 lb
<b>Width</b>	31.75 mm   1.25 in

Environmental Specifications

<b>Operating Temperature</b>	-55 °C to +85 °C (-67 °F to +185 °F)
<b>Storage Temperature</b>	-65 °C to +125 °C (-85 °F to +257 °F)
<b>Mechanical Shock Test Method</b>	IEC 60068-2-27
<b>Climatic Sequence Test Method</b>	IEC 60068-1

<b>Damp Heat Steady State Test Method</b>	IEC 60068-2-3
<b>Thermal Shock Test Method</b>	IEC 60068-2-14
<b>Vibration Test Method</b>	IEC 60068-2-6
<b>Corrosion Test Method</b>	IEC 60068-2-11

## Standard Conditions

<b>Attenuation, Ambient Temperature</b>	20 °C   68 °F
<b>Average Power, Ambient Temperature</b>	40 °C   104 °F
<b>Average Power, Inner Conductor Temperature</b>	100 °C   212 °F