

Fiber OSP cable, Zero Water Peak,<sup>®</sup> Blown Micro Single Jacket All-Dielectric Outdoor Stranded Loose Tube 200um Fiber Arid-Core<sup>™</sup> Construction, 216 fiber, Singlemode G.652.D and G.657.A1, Gel-filled, Meters jacket marking, Black jacket color

Product Classification

Regional Availability	EMEA
Portfolio	CommScope <sup>®</sup>
Product Type	Fiber OSP cable
Product Series	B-LN


General Specifications

Cable Type	Stranded loose tube
Construction Type	Non-armored
Subunit Type	Gel-filled
Jacket Color	Black
Jacket Marking	Meters
Jacket Marking Method	Laser
Subunit, quantity	9
Fibers per Subunit, quantity	24
Total Fiber Count	216

Dimensions

Buffer Tube/Subunit Diameter	1.4 mm   0.055 in
Diameter Over Jacket	6.4 mm   0.252 in

Representative Image

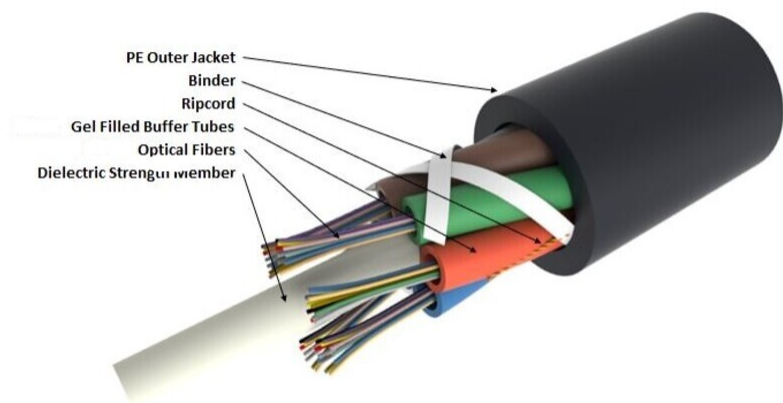

## Material Specifications

Jacket Material

High density polyethylene (HDPE)

## Mechanical Specifications

Minimum Bend Radius, loaded	130 mm   5.118 in
Minimum Bend Radius, unloaded	90 mm   3.543 in
Tensile Load, long term, maximum	360 N   80.931 lbf
Tensile Load, short term, maximum	1200 N   269.771 lbf
Cable Crush Resistance, maximum	5 N/mm   28.551 lb/in
Compression Test Method	IEC 60794-1 E3
Flex	25 cycles
Flex Test Method	IEC 60794-1 E6
Impact	1 N-m   8.851 in lb
Impact Test Method	IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33   IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	IEC 60794-1 E7

## Optical Specifications

Fiber TypeG.652.D and G.657.A1

### Environmental Specifications

Installation temperature	-15 °C to +40 °C (+5 °F to +104 °F)
Operating Temperature	-30 °C to +70 °C (-22 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Cable Qualification Standards	IEC 60794-5-10
Environmental Space	Air-blown, microduct
Jacket UV Resistance	UV stabilized
Water Penetration	24 h
Water Penetration Test Method	IEC 60794-1 F5

### Environmental Test Specifications

Cable Freeze Test Method	IEC 60794-1 F15
Drip	70 °C   158 °F
Drip Test Method	IEC 60794-1 E14
Heat Age	-30 °C to +85 °C (-22 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Temperature Cycle	-30 °C to +70 °C (-22 °F to +158 °F)
Temperature Cycle Test Method	IEC 60794-1 F1

### Packaging and Weights

Cable weight	46.5 kg/km   31.247 lb/kft
--------------	----------------------------

### Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
REACH-SVHC	Compliant as per SVHC revision on <a href="https://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant



### Included Products

# 810010427/DB | B-216-LN-8W-M24BK/14G 200

---

CS-8W-200-EMEA 8W-200um	–	Low Macrobending, Zero Water Peak, Dispersion-Unshifted Singlemode Fiber
----------------------------	---	-----------------------------------------------------------------------------

## \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable

# CS-8W-200-EMEA | 8W-200um

Low Macrobending, Zero Water Peak, Dispersion-Unshifted Singlemode Fiber

## Product Classification

Portfolio	CommScope®
Product Type	Optical fiber

## General Specifications

Cladding Diameter	125 µm
Cladding Diameter Tolerance	±0.7 µm
Cladding Non-Circularity, maximum	0.7 %
Coating Diameter (Colored)	200 µm
Coating Diameter (Uncolored)	190 µm
Coating Diameter Tolerance (Colored)	±10 µm
Coating Diameter Tolerance (Uncolored)	±10 µm
Coating/Cladding Concentricity Error, maximum	12 µm
Core/Clad Offset, maximum	0.5 µm
Proof Tensile Stress	100,000 psi (0.69 GPa)

## Dimensions

Fiber Curl, minimum	4 m   13.123 ft
---------------------	-----------------

## Mechanical Specifications

Macrobending, 20 mm Ø mandrel, 1 turn	0.75 dB @ 1,550 nm   1.50 dB @ 1,625 nm
Macrobending, 30 mm Ø mandrel, 10 turns	0.25 dB @ 1,550 nm   1.00 dB @ 1,625 nm
Macrobending, 50 mm Ø mandrel, 100 turns	0.05 dB @ 1,550 nm   0.05 dB @ 1,625 nm
Coating Strip Force, maximum	8.9 N   2.001 lbf
Coating Strip Force, minimum	1.3 N   0.292 lbf
Dynamic Fatigue Parameter, minimum	20

## Optical Specifications

Cabled Cutoff Wavelength, maximum	1250 nm
Point Defects, maximum	0.05 dB
Zero Dispersion Slope, maximum	0.092 ps/[km-nm-nm]

# CS-8W-200-EMEA | 8W-200um

Zero Dispersion Wavelength, maximum	1324 nm
Zero Dispersion Wavelength, minimum	1300 nm
Optical Specifications, Wavelength Specific	
Attenuation, maximum	0.20 dB/km @ 1550 nm   0.23 dB/km @ 1,625 nm   0.344 dB/km @ 1310 nm   0.344 dB/km @ 1380 – 1385 nm
Dispersion, maximum	18 ps(nm-km) at 1550 nm   22 ps(nm-km) at 1625 nm   3.5 ps(nm-km) from 1285 nm to 1330 nm at 1310 nm
Index of Refraction	1.467 @ 1,310 nm   1.467 @ 1,385 nm   1.468 @ 1,550 nm
Mode Field Diameter	10.4 µm @ 1,550 nm   9.2 µm @ 1,310 nm
Mode Field Diameter Tolerance	±0.4 µm @ 1310 nm   ±0.5 µm @ 1550 nm
Polarization Mode Dispersion Link Design Value, maximum	0.05 ps/sqrt(km)
Standards Compliance	ITU-T G.652.D   ITU-T G.657.A1

## Environmental Specifications

Heat Aging, maximum	0.05 dB/km @ 85 °C
Temperature Dependence, maximum	0.05 dB/km
Temperature Humidity Cycling, maximum	0.05 dB/km
Water Immersion, maximum	0.05 dB/km @ 23 °C

## \* Footnotes

Temperature Dependence, maximum	Temperature dependence is conducted at -60 °C to +85 °C (-76 °F to +185 °F)
Temperature Humidity Cycling, maximum	Temperature humidity cycling is conducted at -10 °C to +85 °C (+14 °F to +185 °F) up to 95% relative humidity