

760258679 | 1573A BLK C6 4/21 U/UTP R3000



GigaREACH™ XL "Extended Distance" 1573A Category 6 U/UTP Cable, gel-filled outdoor, black jacket, 4 pair count, 3000 ft (915 m) length, reel

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	SYSTIMAX®
Product Type	Twisted pair cable
Product Brand	GigaREACH™ XL

General Specifications

Product Number	1573A
ANSI/TIA Category	6
Cable Component Type	Horizontal
Cable Type	U/UTP (unshielded)
Conductor Type, singles	Solid
Conductors, quantity	8
Jacket Color	Black
Pairs, quantity	4
Separator Type	Isolator Tape separator
Transmission Standards	ANSI/TIA-568-D.2

Dimensions

Cable Length	914.4 m 3000 ft
Diameter Over Jacket, nominal	7.112 mm 0.28 in
Jacket Thickness	0.635 mm 0.025 in
Conductor Gauge, singles	21 AWG


Electrical Specifications

Insertion Loss Margin	20% to Category 6 standard
Characteristic Impedance	100 ohm
dc Resistance Unbalance, maximum	5 %

760258679 | 1573A BLK C6 4/21 U/UTP R3000

dc Resistance, maximum	4.69 ohms/100 m 1.43 ohms/100 ft
Delay Skew, maximum	45 ns
Dielectric Strength, minimum	1500 Vac 2500 Vdc
Mutual Capacitance at Frequency	6.4 nF/100 m @ 1 kHz
Nominal Velocity of Propagation (NVP)	60 %
Operating Frequency, maximum	250 MHz
Operating Voltage, maximum	80 V
Remote Powering	Fully complies with the recommendations set forth by IEEE 802.3bt (Type 4) for the safe delivery of power over LAN cable when installed according to ISO/IEC 14763-2, CENELEC EN 50174-1, CENELEC EN 50174-2 or TIA TSB-184-A
Safety Voltage Rating	300 V

Representative Image

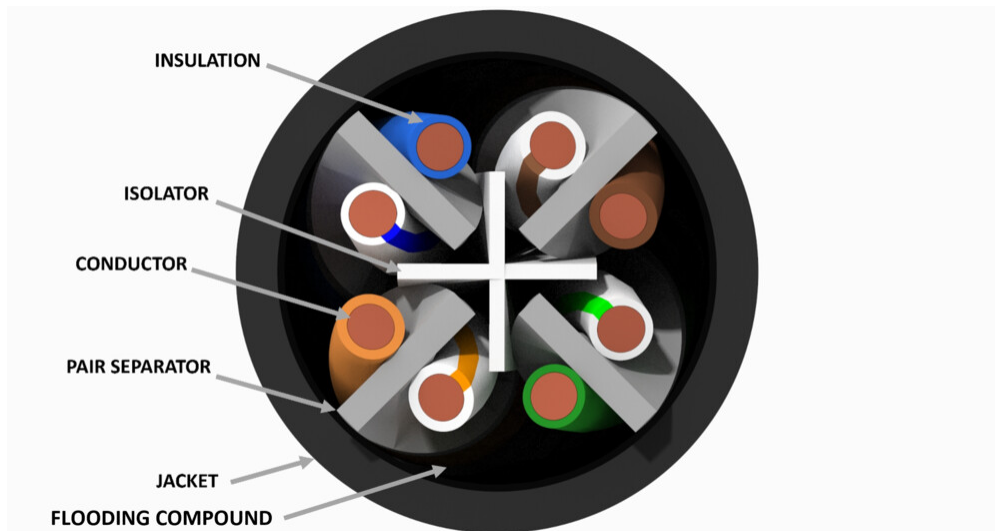

Material Specifications

Conductor Material	Bare copper
Insulation Material	Polyolefin
Jacket Material	PE
Separator Material	Polyolefin

Mechanical Specifications

Pulling Tension, maximum	11.34 kg 25 lb
---------------------------------	------------------

760258679 | 1573A BLK C6 4/21 U/UTP R3000

Environmental Specifications

Installation temperature	-30 °C to +70 °C (-22 °F to +158 °F)
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
EN50575 CPR Cable EuroClass Fire Performance	No Rating
Environmental Note	UV resistant for outdoor and/or direct burial installations
Environmental Space	Buried

Packaging and Weights

Cable weight	223.225 kg/km 150 lb/kft
Packaging Type	Reel