

# PFC-302L16



## FiberREACH™ Powered Fiber Cable, OM3, 2 Fibers, Indoor/Outdoor, 16AWG Conductor, meter, feet

- Easy peel, stranded conductors for maximum cable flexibility and rapid access
- Polarization indentation along one side of the cable for polarity identification
- No special tools or mounting hardware required - usage of a standard “FTTH” pressure clamp for aerial installation
- Easy split of cable into three separate sections for separate routing in closures, as needed for installation
- Riser/LSZH jacket for indoor/outdoor applications
- Cable should not be installed in conduit, direct burial applications or below grade where cable is immersed or is continually in contact with water or moisture

### Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America
Product Type	Hybrid cable, fiber and power
Product Brand	FiberREACH™
Ordering Note	Minimum order quantity is 500 meter

### General Specifications


Cable Type	Stranded indoor/outdoor
Fiber Short Description	PFC-L16
Jacket Color	Black
Total Fiber Count	2

### Dimensions

Height Over Jacket	4.318 mm   0.17 in
Width Over Jacket	11.43 mm   0.45 in
Conductor Gauge	16 AWG

### Outline Drawing

# PFC-302L16

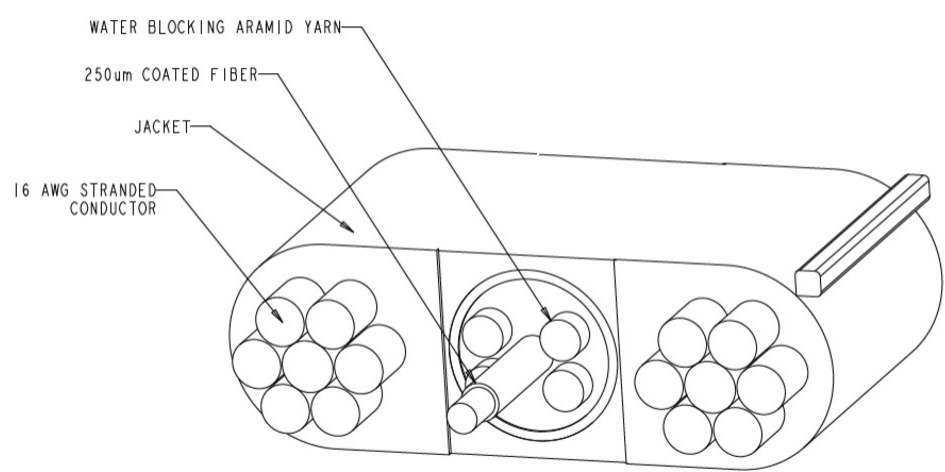

## Mechanical Specifications

Minimum Bend Radius, loaded	88.9 mm   3.5 in
Minimum Bend Radius, unloaded	45.72 mm   1.8 in
Tensile Load, long term, maximum	133.447 N   30 lbf
Tensile Load, short term, maximum	440.374 N   99 lbf
Vertical Rise, maximum	122.011 m   400.3 ft

## Optical Specifications

Fiber Type	OM3, bend insensitive
------------	-----------------------

## Environmental Specifications

Installation temperature	-10 °C to +60 °C (+14 °F to +140 °F)
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Cable Qualification Standards	Telcordia GR-20-CORE Issue 4
EN50575 CPR Cable EuroClass Fire Performance	Dca
EN50575 CPR Cable EuroClass Smoke Rating	s1a
EN50575 CPR Cable EuroClass Droplets Rating	d1
EN50575 CPR Cable EuroClass Acidity Rating	a1
Environmental Space	Low Smoke Zero Halogen (LSZH)   Riser

# PFC-302L16


**Flame Test Method** IEC 60332-1-2 | IEC 60754-2 | IEC 61034-2 | NFPA 130 | UL 1666 | UL 444

**Jacket UV Resistance** UV stabilized

## Packaging and Weights

**Cable weight** 69.944 kg/km | 47 lb/kft

## Regulatory Compliance/Certifications

Agency	Classification
CENELEC	EN 50575 compliant, Declaration of Performance (DoP) available
	

## Included Products

- CS-5E-PFC – 50µm OM3 Bend-Insensitive Multimode Fiber

# CS-5E-PFC

---

## 50µm OM3 Bend-Insensitive Multimode Fiber

### Product Classification

Portfolio	CommScope®
Product Type	Optical fiber

### General Specifications

Cladding Diameter	125 µm
Cladding Diameter Tolerance	±5 µm
Cladding Non-Circularity, maximum	0.7 %
Coating Diameter (Colored)	242 µm
Coating Diameter Tolerance (Colored)	±7 µm
Coating/Cladding Concentricity Error, maximum	10 µm
Core Diameter	50 µm
Core Diameter Tolerance	±2.5 µm
Core/Clad Offset, maximum	1 µm
Proof Tensile Stress	100,000 psi (0.69 GPa)

### Mechanical Specifications

Macrobending, 15 mm Ø mandrel, 2 turns	0.20 dB @ 850 nm   0.50 dB @ 1,300 nm
Macrobending, 30 mm Ø mandrel, 2 turns	0.10 dB @ 850 nm   0.30 dB @ 1,300 nm
Coating Strip Force, maximum	8.9 N   2.001 lbf
Coating Strip Force, minimum	1.3 N   0.292 lbf
Dynamic Fatigue Parameter, minimum	25

### Optical Specifications

Numerical Aperture	0.2
Numerical Aperture Tolerance	±0.015
Point Defects, maximum	0.2 dB
Zero Dispersion Slope, maximum	0.105 ps/[km-nm-nm]
Zero Dispersion Wavelength, maximum	1340 nm
Zero Dispersion Wavelength, minimum	1295 nm

# CS-5E-PFC

## Optical Specifications, Wavelength Specific

Attenuation, maximum	1.20 dB/km @ 1,300 nm   3.00 dB/km @ 850 nm
Backscatter Coefficient	-68.0 dB @ 850 nm   -75.7 dB @ 1,300 nm
Bandwidth, Laser, minimum	2,000 MHz-km @ 850 nm   500 MHz-km @ 1,300 nm
Bandwidth, OFL, minimum	1,500 MHz-km @ 850 nm   500 MHz-km @ 1,300 nm
Differential Mode Delay Note	Superior to ANSI/TIA TIA-492AAAF and IEC 60793-2-10 at 850 nm
Index of Refraction	1.477 @ 1,300 nm   1.482 @ 850 nm
Standards Compliance	ANSI/TIA-492AAAF (OM3)

## Environmental Specifications

Heat Aging, maximum	0.10 dB/km @ 85 °C
Temperature Dependence, maximum	0.1 dB/km
Temperature Humidity Cycling, maximum	0.1 dB/km
Water Immersion, maximum	0.10 dB/km @ 23 °C

## Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

### \* Footnotes

Temperature Dependence, maximum	Temperature dependence is conducted at -60 °C to +85 °C (-76 °F to +185 °F)
Temperature Humidity Cycling, maximum	Temperature humidity cycling is conducted at -10 °C to +85 °C (+14 °F to +185 °F) up to 95% relative humidity