

CK7501-000 | IFDB-M-SP-U24-NN-1



IFDB Fiber Optic Wall Box with Universal splice holder for up to 24 mechanical or SMOUV splices

- Allows splicing those fibers from an indoor riser cable to the individual drops
- Allows fibers from certain riser cables to be broken out without interrupting the strength member
- Separate storage of un-connected fibers from spliced drop fibers
- Compatible with mechanical, SMOUV and ANT splice protectors
- In-line and butt configuration possible for main riser cable

Product Classification

Regional Availability	EMEA
Product Type	Fiber wall box
Product Series	IFDB

General Specifications


Functionality	Splicing
Adapters, quantity	0
Color	Light gray
Front Cover Type	Screw-on
Interface	Splicing only
Mounting	Floor Wall
Splice Tray Chip Type	Mechanical SMOUV
Splicing Capacity, maximum	24

Dimensions

Height	200 mm 7.874 in
Width	126 mm 4.961 in
Depth	50 mm 1.969 in

Outline Drawing

CK7501-000 | IFDB-M-SP-U24-NN-1

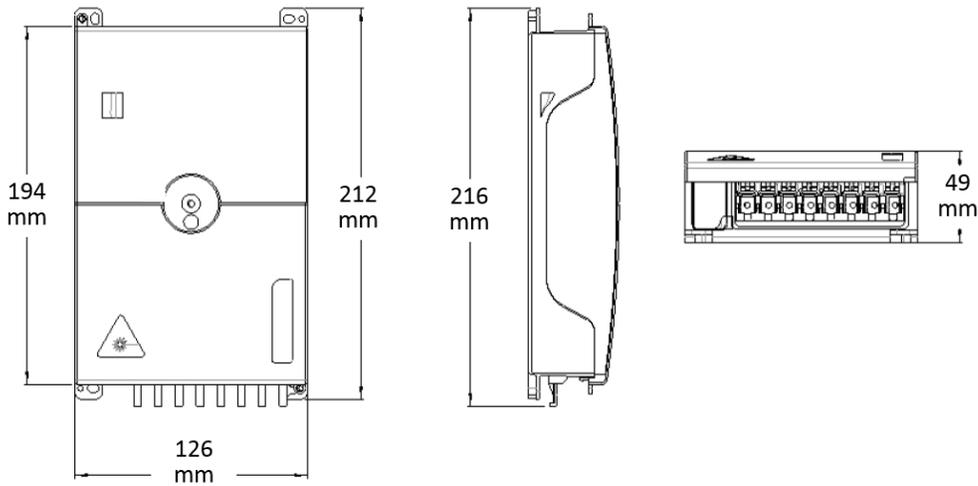

Material Specifications

Material Type Thermoplastic

Environmental Specifications

Environmental Space Indoor

Flammability Rating UL 94 V-0

Qualification Standards IEC 60529, IP30

Packaging and Weights

Packaging quantity 1

Packaging Type Bag | Carton

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted

