# RCP-172PUK03167



RapidFiber® Termination Panel, 24-Position 1RU, singlemode, SC/UPC to LC/UPC, 61 m  $\,$ 

#### Product Classification

Regional Availability	Latin America   North America
Portfolio	CommScope®
Product Type	Fiber patch panel, with rapid cable
Product Brand	RapidFiber®
Product Series	RCP

#### General Specifications

Functionality	Patching
Body Style	Symmetrical
Cable Exit Location	Rear, left side
Cable Stub Type	Indoor, microcable
Color	Putty white
Door Type, front	Hinged   Slide latch   Transparant
Growth Configuration	Fully loaded
Interface, front	SC/UPC
Interface, rear	LC/UPC
Patch Cord Entry Location	Front, left side   Front, right side
Rack Type	EIA 19 in   EIA 23 in
Rack Units	1
Shelf Movement	Sliding
Total Fibers, quantity	24
Total Ports, quantity	24
Transmission Standards	IEC 60794-2   ISO/IEC 11801   TIA/EIA-568-B.3
Dimensions	
Height	44.45 mm   1.75 in

**Width** 482.6 mm | 19 in

Page 1 of 3

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: February 21, 2024



### RCP-172PUK03167


Depth

381 mm | 15 in

Cable Length

61 m | 200.131 ft

### Ordering Tree

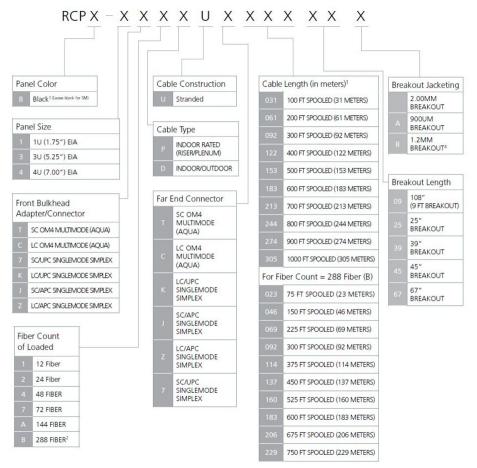

ONLY FOR MULTIMODE VERSION.1

ONLY AVAILABLE IN RISER/PLENUM (P) CABLE TYPE<sup>2</sup> RAPID PANEL IS DESIGNED AND QUALIFIED FOR UP TO 1000' (305 METERS) OF CABLE.<sup>3</sup> ONLY AVAILABLE IN LC288 4RU<sup>4</sup>

#### Material Specifications

Finish	Powder coated
Material Type	Steel
Optical Specifications	
Fiber Mode	Singlemode

Fiber Type	G.652.D	G.657.A2/B2

Page 2 of 3

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: February 21, 2024



# RCP-172PUK03167

### **Environmental Specifications**

Operating Temperature	-5 °C to +55 °C (+23 °F to +131 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Relative Humidity	5%–85%, non-condensing
Qualification Standards	NEBS Level 3   Telcordia GR-1435   Telcordia GR-326   Telcordia GR-409   UL 1863

#### Packaging and Weights

Packaging quantity

#### Regulatory Compliance/Certifications

1

Agency	Classification
CHINA-ROHS	Above maximum concentration value
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted





©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: February 21, 2024

