RCP-3KAPUK03167



RapidFiber® Termination Panel, 144-Position 3RU, singlemode, LC/UPC to LC/UPC, 31 m 67 in breakout

Product Classification

Regional Availability	Latin America North America
Portfolio	CommScope®
Product Type	Fiber patch panel, with rapid cable
Product Brand	RapidFiber®
Product Series	RCP

General Specifications

Functionality	Patching	
Body Style	Symmetrical	
Cable Exit Location	Rear, left side	
Cable Stub Type	Indoor, microcable	
Color	Putty white	
Door Type, front	Hinged Slide latch Transparant	
Growth Configuration	Fully loaded	
Interface, front	LC/UPC	
Interface, rear	LC/UPC	
Patch Cord Entry Location	Front, left side Front, right side	
Rack Type	EIA 19 in EIA 23 in	
Rack Units	3	
Shelf Movement	Sliding	
Total Fibers, quantity	144	
Total Ports, quantity	144	
Transmission Standards	IEC 60794-2 ISO/IEC 11801 TIA/EIA-568-B.3	
Dimensions		
Height	133.35 mm 5.25 in	
Width	482.6 mm 19 in	

Page 1 of 3

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: February 21, 2024



RCP-3KAPUK03167


Depth

381 mm | 15 in

Cable Length

31 m | 101.706 ft

Ordering Tree

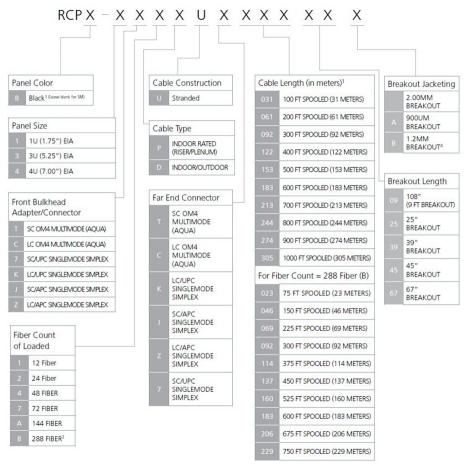

ONLY FOR MULTIMODE VERSION.¹

ONLY AVAILABLE IN RISER/PLENUM (P) CABLE TYPE² RAPID PANEL IS DESIGNED AND QUALIFIED FOR UP TO 1000' (305 METERS) OF CABLE.³ ONLY AVAILABLE IN LC288 4RU⁴

Material Specifications

Finish	Powder coated
Material Type	Steel
Optical Specifications	
Fiber Mode	Singlemode
Fiber Type	G.652.D G.657.A2/B2

Page 2 of 3

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: February 21, 2024



RCP-3KAPUK03167

Environmental Specifications

Operating Temperature	-5 °C to +55 °C (+23 °F to +131 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Relative Humidity	5%–85%, non-condensing
Qualification Standards	NEBS Level 3 Telcordia GR-1435 Telcordia GR-326 Telcordia GR-409 UL 1863

Packaging and Weights

Packaging quantity

1

Regulatory Compliance/Certifications

Agency

Classification

CHINA-ROHS ROHS



Above maximum concentration value Compliant/Exempted Compliant/Exempted

Page 3 of 3

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: February 21, 2024

