

# 760237707 | FOSC-OPGW-B4NT-0/6-NNC



FOSC® OPGW B Fiber Optic Splice Closure, Heat Shrink Cable sealing, butt type, no pre-installed trays

## Product Classification

### Regional Availability

Asia | EMEA | Latin America | North America

### Product Type

Single-ended, round fiber closure

### Product Brand

FOSC®

### Product Series

FOSC OPGW

## General Specifications

### Cable Entry Drop Port Style

Round

### Cable Entry Main Port Style

Round

### Cable Ports Quantity, total

1 oval port (2 cables) + 4 round ports

### Cable Sealing Type

Heat shrink

### Closure Sealing Type

Dome-to-base clamp with O-ring

### Closure Style

Single-ended

### Color

Black

### Mounting

Pole | Strand | Wall

### Network Area Type

Feeder

### Splice Tray Included, quantity

0

### Splicing Capacity, Mass Fusion, maximum

144

### Splicing Capacity, Single Fusion, maximum

96

### Splicing Capacity, Single Splice, 12 fibers, maximum

96

### Splicing Capacity, Single Splice, 6 fibers, maximum

48

### Splicing Type, Supported

Mass fusion | Single fusion

## Dimensions

### Height


240 mm | 9.449 in

# 760237707 | FOSC-OPGW-B4NT-0/6-NNC

<b>Width</b>	202 mm   7.953 in
<b>Length</b>	730 mm   28.74 in
<b>Main Cable Diameter, maximum</b>	19 mm   0.748 in

## Ordering Tree

FOSC - OPGW - XX XXX - X - X X X

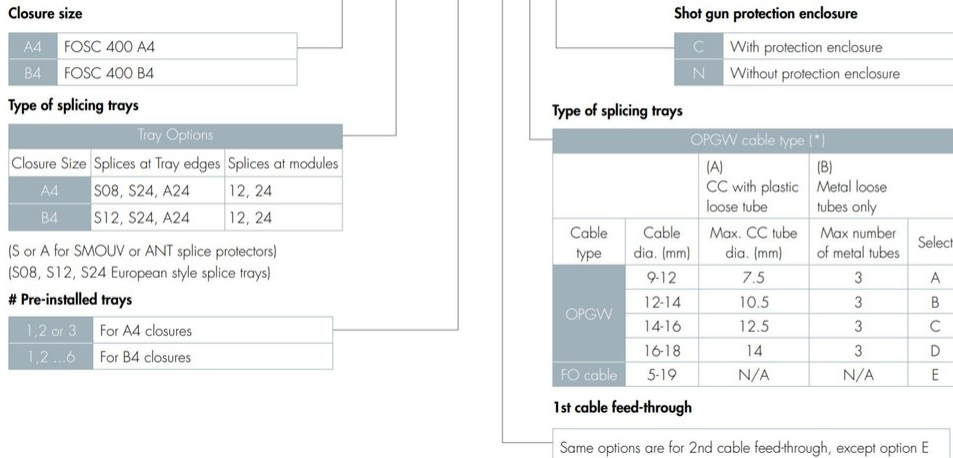

## Material Specifications

<b>Material Type</b>	Impact-resistant polymer
----------------------	--------------------------

## Environmental Specifications

<b>Environmental Space</b>	Above ground
<b>Qualification Standards</b>	IEC 61300, 6 m waterhead

## Packaging and Weights

<b>Packaging quantity</b>	1
<b>Packaging Type</b>	Box   Carton
<b>Weight, net</b>	18 kg   39.683 lb

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

