

FPX-4FR000-000



FPX Fiber Optic Termination/Splice Module, unloaded, 4RU, 19in, putty white

Product Classification

Regional Availability	Latin America North America
Portfolio	CommScope®
Product Type	Fiber patch/splice panel
Product Series	FPX

General Specifications


Functionality	Patching Splicing
Body Style	Symmetrical
Cable Exit Location	Rear, left side Rear, right side
Color	Putty white
Growth Configuration	Unloaded
Interface, front	Unloaded
Rack Type	EIA 19 in EIA 23 in
Rack Units	4
Shelf Movement	Sliding
Total Fibers, quantity	0
Total Ports, quantity	0

Dimensions

Height	175.26 mm 6.9 in
Width	482.6 mm 19 in
Depth	304.8 mm 12 in

Ordering Tree

FPX-4FR000-000

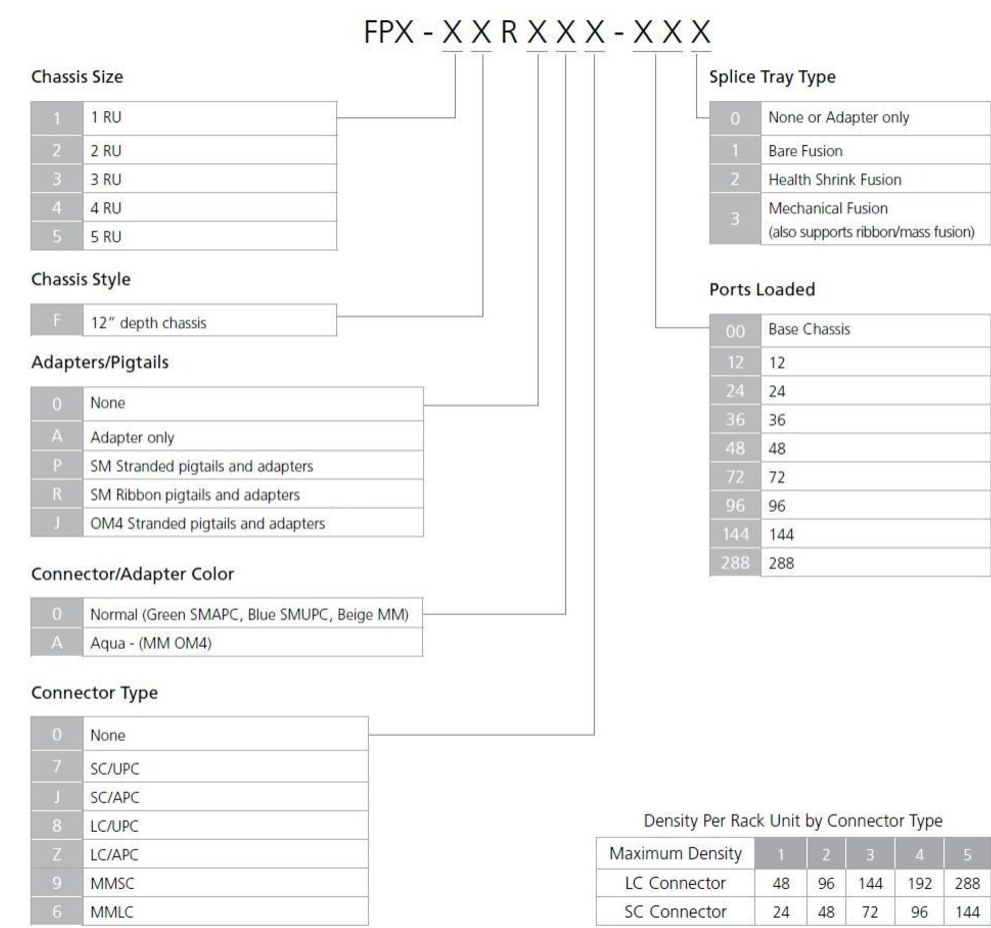

Material Specifications

Finish	Powder coated
Material Type	Steel

Environmental Specifications

Operating Temperature	-40 °C to +85 °C (-40 °F to +185 °F)
Storage Temperature	-40 °C to +85 °C (-40 °F to +185 °F)

Packaging and Weights

Included	Mounting hardware
Packaging quantity	1

Regulatory Compliance/Certifications

FPX-4FR000-000

Agency	Classification
CHINA-ROHS	Below maximum concentration value
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant

