OTE200-06MH-NN-S12-G-W



Mini-OTE 200-Series, Optical Terminal Enclosure, 6-port full-size connector, no splitter, gray, wall mount

- Optical Terminal Enclosures incorporate hardened connector technology that is designed to withstand the rugged outside plant environment
- Functionality to splice and store feeder cable in the field with the possibility to splice in the field two extra branch cables
- Hardened adapters are factory-terminated and environmentally sealed to ensure rapid plug-and play drop cable installations
- Integrated external cable fixation guarantees easy, fast and reliable cable manipulations

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America
Product Type	Access terminal, without splitter/tap
Product Series	Mini-OTE 200
General Specifications	
Cable Type	No cable (stubless)
Cable, quantity	0
Distribution Type	6 ports
Enclosure Color	Gray
Mounting	Handhole Pole Wall
Port Type	Hardened full-size SC/APC
Port, quantity	6
Splitter, quantity	0
Stub Type	No tail
Dimensions	
Height	358.5 mm 14.114 in
Width	166 mm 6.535 in
Depth	129.3 mm 5.091 in
Cable Length, stub	0 ft (0 m)


Dimension Drawing


Page 1 of 3


©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: April 10, 2024




OTE200-06MH-NN-S12-G-W

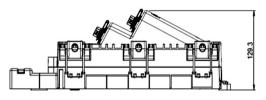

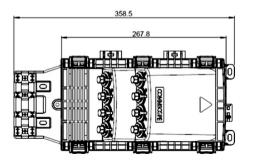



Ordering Tree

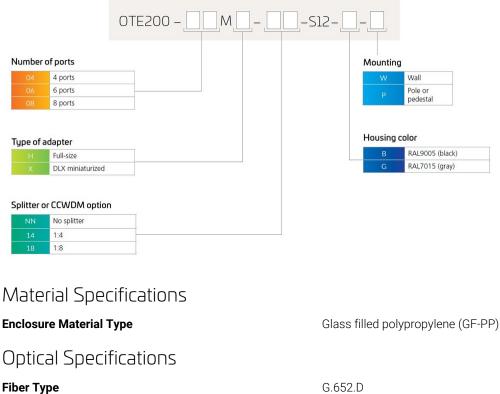

Operating Wavelength Range

G.652.D 1260 – 1635 nm 0.4 dB

Attenuation Terminal Connectors, maximum

Page 2 of 3

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: April 10, 2024



OTE200-06MH-NN-S12-G-W

Insertion Loss, Terminal Connector, typical	0.16 dB
Return Loss, Connector, minimum	65 dB

Environmental Specifications

Operating Temperature	-40 °C to +65 °C (-40 °F to +149 °F)
Relative Humidity	5%–100%, condensing
Environmental Space	Above ground Below ground Buried
Qualification Standards	IEC 60529, IP68 + 3 m waterhead
UV Resistance	UV stabilized
Packaging and Weights	
Included	Cable termination unit (2) Enclosure (1) Fiber pigtail cassette (1) Splice Cassette (2)
Packaging quantity	1
Packaging Type	Box Carton
Pequilatory Compliance/Certifications	

Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

Included Products

CW8094-002 – TENIO[™] Cable Termination Unit kit TENIO-CTU-L-(10)

Page 3 of 3

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: April 10, 2024

