CHRRF | IP06-18RUTP-1100E-1100E



InstaPATCH® Cu GigaSPEED XL® U/UTP Riser Preterminated Copper Cable, 360 1100 Evolve module to 360 1100 Evolve module, 18 links

This product will be discontinued on: January 31, 2025

Product Classification

Regional Availability

Asia | Australia/New Zealand | EMEA | Latin America | North America

Portfolio CommScope®

Product Type Copper trunk cable assembly

Product Brand GigaSPEED XL® | InstaPATCH® Cu

General Specifications

ANSI/TIA Category 6

Cable Type U/UTP (unshielded)

Conductor Type Solid

Interface, Connector A 360 1100 Evolve module

Interface Feature, connector A Standard

Interface, Connector B 360 1100 Evolve module

Interface Feature, connector B Standard

Link Count 18

Wiring T568B

Dimensions

Cable Assembly Length Range (m) 2 - 90

Cable Assembly Length Range (ft) 7 - 295


Electrical Specifications

dc Resistance, maximum0.3 ohmSafety Voltage Rating300 V

COMMSC PE°

IP06-18RUTP-1100E-1100E CHRRF

Ordering Tree

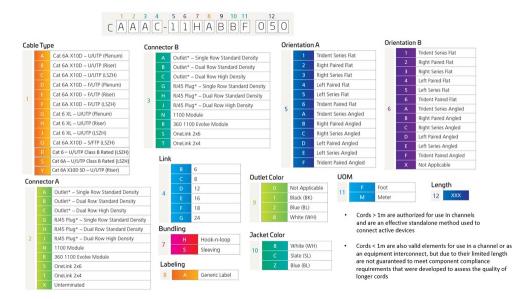

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Riser

Flammability Rating UL 94 V-0

Regulatory Compliance/Certifications

Agency Classification

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

Included Products

GigaSPEED XL® 1071E ETL Verified Category 6 U/UTP Cable, non-plenum, 4 pair count 1071E-4/23

SYSTIMAX 360™ GigaSPEED XL® 1100GS3 Evolve Category 6 U/UTP Distribution Module, 6 760151167 360-IPR-1100-GS3-DM6

port



Page 2 of 2