FKXMPMPDM

Base Product



OM4 MPO (Unpinned) to MPO (Unpinned), InstaPATCH® 360 Armored Pre-terminated Trunk Cable, 144-Fiber, Low Smoke Zero Halogen

Product Classification

Regional Availability

Asia | Australia/New Zealand | China | India | Latin America | Middle East

/Africa | North America

Portfolio CommScope®

Product Type Fiber trunk cable assembly
Product Brand SYSTIMAX InstaPATCH® 360

Ordering Note For lengths greater than 999 ft (304 m), orders must be in meters | Minimum length

may vary based on cable configuration | Not available in the United States or Canada

General Specifications

Color, boot ABlackColor, connector AAquaColor, boot BBlackColor, connector BAqua

Construction Type Armored | Stranded

Furcation Color Aqua

 Interface, Connector A
 MPO-12/UPC Female

 Interface, Connector B
 MPO-12/UPC Female

Jacket Color Black

Polarity Method B (LL)

Fibers per Subunit, quantity 12

Total Fibers, quantity 144

Dimensions


Cable Assembly Length Range (m) 3 - 999

Cable Assembly Length Range (ft) 10 - 999



FKXMPMPDM

Ordering Tree

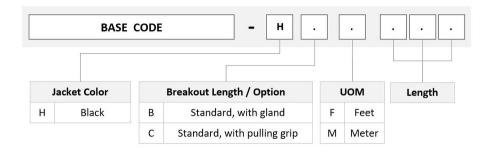

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 ° | 4.40 lb @ 90 °

Optical Specifications

Fiber Mode Multimode

Fiber Type OM4, LazrSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)

Environmental Space Dual Rated LSZH/Riser | Indoor/Outdoor

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| CHINA-ROHS | Above maximum concentration value |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |
| ROHS | Compliant/Exempted |
| UK-ROHS | Compliant/Exempted |



Included Products

Fiber indoor/outdoor cable, LazrSPEED® Low Smoke Zero Halogen Riser MPO Trunk, 760150847 Z-144-MZ-5K-F12BK

interlocking aluminum armored, Multimode OM4, 144 fiber multi-unit with 12 fiber subunits, Gel-

free, Feet jacket marking, Black jacket color

MPO12, LOW LOSS, FEMALE, OM3/4, AQUA, 3mm 860647054

Page 2 of 3

FKXMPMPDM

