

# Sigma-Link™ Universal Connectivity Platform Q-Fit Cable Assembly, UTP, class E, H to H, POF, 35 m

- Sigma-Link is a pre-terminated factory-tested copper system for networking infrastructures and guarantees a 100% throughput performance
- Sigma-Link cable assemblies are offered in Housing-to-Housing, Housing-to-Jacks, Housingto-Plugs and Housing to stub tail configurations
- Ranging from Category 6 to Category 7A, Sigma-Link supports up to 10GbE (10 Gigabit Ethernet) transmission and beyond
- Housing-to-Housing version features integrated Plastic Optical Fiber (POF) for easy tracing of far end

#### **OBSOLETE**

This product was discontinued on: October 10, 2017

### Product Classification

Regional Availability

Asia | Australia/New Zealand | EMEA | Latin America

Portfolio NETCONNECT®

Product Type Copper trunk cable assembly

**Product Brand** Sigma-Link™

Product Series Sigma-Link | UCP

### General Specifications

ANSI/TIA Category 6

Cable Type U/UTP (unshielded)

Conductor Type Solid

Interface, Connector A Information outlet

Interface Feature, connector A Single row | Standard density

Interface, Connector B Information outlet

Interface Feature, connector B Single row | Standard density

Jacket Color White
Link Count 6

**Transmission Standards** ISO/IEC 11801 Class E

#### Dimensions

Page 1 of 3



# 3-2153469-5


**Cord Length** 

35 m | 114.829 ft



# 3-2153469-5

### Wiring Diagram

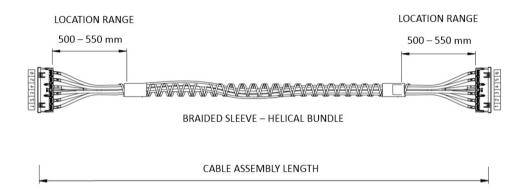

## Material Specifications

**Conductor Material** Bare copper

### **Environmental Specifications**

**Operating Temperature**  $-10 \,^{\circ}\text{C}$  to  $+60 \,^{\circ}\text{C}$  (+14  $^{\circ}\text{F}$  to +140  $^{\circ}\text{F}$ )

Storage Temperature -20 °C to +80 °C (-4 °F to +176 °F)

Environmental Space Low Smoke Fire Retardant Zero Halogen (LSFRZH)

Packaging and Weights

Packaging quantity

### Regulatory Compliance/Certifications

### Agency Classification

CHINA-ROHS Below maximum concentration value

REACH-SVHC Compliant as per SVHC revision on www.commscope.com/ProductCompliance

ROHS Compliant



