## 1920608-1 | OCJ-L1-01MASIA-L1



Fiber Optic Patch Cord, Simplex, Singlemode, LC/UPC to LC/UPC, yellow, 1 m

#### **Product Classification**

Regional Availability EMEA

**Product Type** Fiber patch cord, simplex

Product Series OCJ

### General Specifications

Connector A, quantity 1

Color, boot ABlueColor, connector ABlueConnector B, quantity1

Color, connector B Blue
Interface, Connector A LC/UPC

 Interface, Connector A
 LC/UPC

 Interface, Connector B
 LC/UPC

Total Fibers, quantity 1

#### Dimensions

Color, boot B

**Jacket Color** 

Cable Assembly Length Range (m) 1 - 999

Cable Assembly Length Range (ft) 1 - 999

 Cord Length
 1 m | 3.281 ft

 Diameter Over Jacket
 1.8 mm | 0.071 in


## Ordering Tree



Blue

Yellow

# 1920608-1 | OCJ-L1-01MASIA-L1

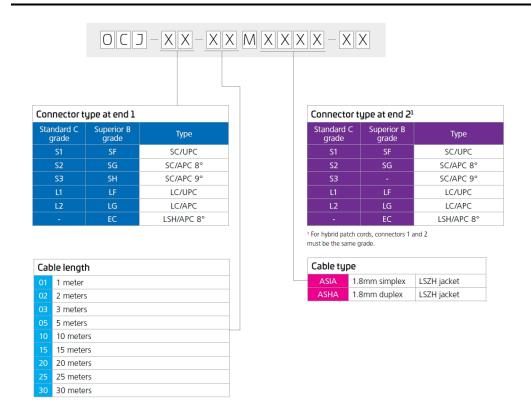

### Optical Specifications

**Fiber Mode** Singlemode

**Fiber Type** G.657.A1, TeraSPEED®

Performance Grade Standard C grade

Insertion Loss, maximum, connector A 0.5 dB
Insertion Loss, maximum, connector B 0.5 dB
Return Loss, minimum, connector A 50 dB
Return Loss, minimum, connector B 50 dB

### **Environmental Specifications**

**Operating Temperature**  $-40 \,^{\circ}\text{C} \text{ to } +70 \,^{\circ}\text{C} \, (-40 \,^{\circ}\text{F to } +158 \,^{\circ}\text{F})$ 

**Environmental Space** Low Smoke Zero Halogen (LSZH)

Packaging and Weights

Packaging quantity

COMMSCOPE®

# 1920608-1 | OCJ-L1-01MASIA-L1

## Regulatory Compliance/Certifications

Agency Classification

CHINA-ROHS Below maximum concentration value

REACH-SVHC Compliant as per SVHC revision on www.commscope.com/ProductCompliance

ROHS Compliant UK-ROHS Compliant



#### \* Footnotes

**Performance Grade** Guarantee to meet IEC 61755-1 Random Mating requirement

