TFAH-US4B-34



ION®-B Series High Power Remote Unit for Cellular 700, Cellular 850, AWS and PCS 1900 Extended

OBSOLETE

Product Classification

Product TypeRemote unitProduct BrandION®-B

General Specifications


Note Detailed Product Specifications are available. Please contact your

local CommScope representative.

Power Type High

Dimension Drawing

TFAH-US4B-34

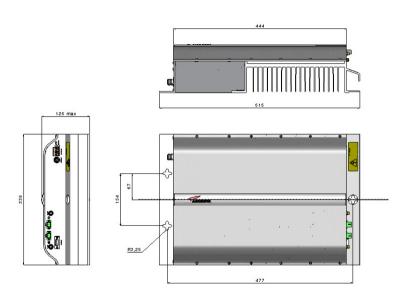

Electrical Specifications

Impedance 50 ohm

License Band AWS | CEL 850 | Cellular 700 | PCS 1900 Extended

-60 to -38 Vdc Voltage Range

Electrical Specifications, Rx (Uplink)

1710 - 1755 MHz (AWS 1700) | 1850 - 1915 MHz (PCS 1900 **Operating Frequency Band** Extended) | 698 - 716 MHz (Cellular 700) | 776 - 787 MHz

(Cellular 700) | 824 - 849 MHz (CEL 850)

Electrical Specifications, Tx (Downlink)

Operating Frequency Band 1930 - 1995 MHz (PCS 1900 Extended) | 2110 - 2155 MHz (AWS 1700) | 728 - 757 MHz (Cellular 700) | 869 - 894 MHz (CEL

850)

Regulatory Compliance/Certifications

Agency Classification

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

Page 2 of 5



TFAH-US4B-34



Included Products

TPSN3/28-130 – Power Supply Adapter ION®-B Series Remote Units, 130



Power Supply Adapter ION®-B Series Remote Units, 130 W

Product Classification

Product Type

Product Brand

General Specifications


Note


Power adapters


ION®-B

Detailed Product Specifications are available. Please contact your local CommScope representative.

Dimension Drawing









TPSN3/28-130

Electrical Specifications

Output Power, maximum

130 W

Regulatory Compliance/Certifications

Agency

Classification

ISO 9001:2015

Designed, manufactured and/or distributed under this quality management system

