

# SBNHH-1D65B



6-port sector antenna, 2x 698–896 and 4x 1695–2360 MHz, 65° HPBW, 2x RET. Both high bands share the same electrical tilt.

- Interleaved dipole technology providing for attractive, low wind load mechanical package
- The antenna is supplied with mounting kits that provide 0 degree of mechanical downtilt; optional downtilt mounting kits are available

## General Specifications

<b>Antenna Type</b>	Sector
<b>Band</b>	Multiband
<b>Color</b>	Light Gray (RAL 7035)
<b>Grounding Type</b>	RF connector inner conductor and body grounded to reflector and mounting bracket
<b>Performance Note</b>	Outdoor usage   Wind loading figures are validated by wind tunnel measurements described in white paper WP-112534-EN
<b>Radome Material</b>	Fiberglass, UV resistant
<b>Radiator Material</b>	Aluminum   Low loss circuit board
<b>Reflector Material</b>	Aluminum
<b>RF Connector Interface</b>	7-16 DIN Female
<b>RF Connector Location</b>	Bottom
<b>RF Connector Quantity, high band</b>	4
<b>RF Connector Quantity, mid band</b>	0
<b>RF Connector Quantity, low band</b>	2
<b>RF Connector Quantity, total</b>	6

## Remote Electrical Tilt (RET) Information


<b>RET Interface</b>	8-pin DIN Female   8-pin DIN Male
<b>RET Interface, quantity</b>	1 female   1 male
<b>Input Voltage</b>	10–30 Vdc
<b>Internal RET</b>	High band (1)   Low band (1)
<b>Power Consumption, idle state, maximum</b>	2 W
<b>Power Consumption, normal conditions, maximum</b>	13 W
<b>Protocol</b>	3GPP/AISG 2.0 (Multi-RET)

# SBNHH-1D65B

## Dimensions

<b>Width</b>	301 mm   11.85 in
<b>Depth</b>	180 mm   7.087 in
<b>Length</b>	1851 mm   72.874 in
<b>Net Weight, without mounting kit</b>	18.4 kg   40.565 lb

## Array Layout

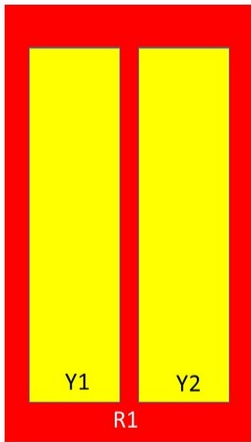

Array	Freq (MHz)	Conns	RET (MRET)	AISG RET UID
R1	698-896	1-2	1	ARxxxxxxxxxxxxxxxxxx.1
Y1	1695-2360	3-4	2	ARxxxxxxxxxxxxxxxxxx.2
Y2	1695-2360	5-6		

Left Right  
Bottom

(Sizes of colored boxes are not true depictions of array sizes)

## Electrical Specifications

<b>Impedance</b>	50 ohm
<b>Operating Frequency Band</b>	1695 – 2360 MHz   698 – 896 MHz
<b>Polarization</b>	±45°

## Electrical Specifications

Frequency Band, MHz	698–806	806–896	1695–1880	1850–1990	1920–2200	2300–2360
<b>Gain, dBi</b>	14.9	14.7	17.7	18.2	18.6	18.6
<b>Beamwidth, Horizontal, degrees</b>	68	65.5	69	66.2	63	58
<b>Beamwidth, Vertical, degrees</b>	12.1	10.7	5.6	5.2	5	4.5
<b>Beam Tilt, degrees</b>	0–14	0–14	0–7	0–7	0–7	0–7
<b>USLS (First Lobe), dB</b>	14	13	15	15	15	13
<b>Front-to-Back Ratio at 180°,</b>	27	29	28	28	28	27

# SBNHH-1D65B

## dB

<b>Isolation, Cross Polarization, dB</b>	25	25	25	25	25	25
<b>Isolation, Inter-band, dB</b>	30	30	30	30	30	30
<b>VSWR   Return loss, dB</b>	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
<b>PIM, 3rd Order, 2 x 20 W, dBc</b>	-153	-153	-153	-153	-153	-153
<b>Input Power per Port at 50°C, maximum, watts</b>	300	300	300	300	300	250

## Mechanical Specifications

<b>Effective Projective Area (EPA), frontal</b>	0.27 m <sup>2</sup>   2.906 ft <sup>2</sup>
<b>Effective Projective Area (EPA), lateral</b>	0.22 m <sup>2</sup>   2.368 ft <sup>2</sup>
<b>Wind Loading @ Velocity, frontal</b>	283.0 N @ 150 km/h (63.6 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, lateral</b>	234.0 N @ 150 km/h (52.6 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, maximum</b>	545.0 N @ 150 km/h (122.5 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, rear</b>	287.0 N @ 150 km/h (64.5 lbf @ 150 km/h)
<b>Wind Speed, maximum</b>	241 km/h (150 mph)

## Packaging and Weights

<b>Width, packed</b>	380 mm   14.961 in
<b>Depth, packed</b>	295 mm   11.614 in
<b>Length, packed</b>	1973 mm   77.677 in
<b>Weight, gross</b>	27.3 kg   60.186 lb

## Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



## Included Products

BSAMNT-2F	-	Mounting bracket for cylindrical pipe installations (60-115mm pipe diameter) for fix mechanical tilt applications.
-----------	---	--

# SBNHH-1D65B

---

\* Footnotes

**Performance Note**      Severe environmental conditions may degrade optimum performance

