

2VV-33C-R4-V5



8-port multibeam antenna, 8x 1695–2690 MHz, 4x 33° HPBW, 4x RET

- Enhances network capacity and spectrum utilization when used in six sector applications
- Reduces antenna count to minimize Cap-Ex and Op-Ex costs – 3 antennas required for 6 sector configurations
- Utilizes RET-PMOD-A20-4A08

General Specifications

Antenna Type	Multibeam
Band	Single band
Color	Light Gray (RAL 7035)
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
Radome Material	Fiberglass, UV resistant
Radiator Material	Low loss circuit board
Reflector Material	Aluminum
RF Connector Interface	7-16 DIN Female
RF Connector Location	Bottom
RF Connector Quantity, high band	8
RF Connector Quantity, total	8

Remote Electrical Tilt (RET) Information


RET Hardware	CommRET v2
RET Interface	2x 8 pin connector as per IEC 60130-9 Daisy chain in: Male / Daisy chain out: Female Pin3: RS485A(AISG_B), Pin5: RS485B(AISG_A), Pin6: DC 10~30V, Pin7: DC_ Return
RET Interface, quantity	1 female 1 male
Internal RET	High band (4)
Power Consumption, idle state, maximum	1 W
Power Consumption, normal conditions, maximum	10 W
Protocol	3GPP/AISG 2.0 (Single RET)

Dimensions

2VV-33C-R4-V5

Width	395 mm 15.551 in
Depth	228 mm 8.976 in
Length	2499 mm 98.386 in
Net Weight, without mounting kit	30.5 kg 67.241 lb

Array Layout

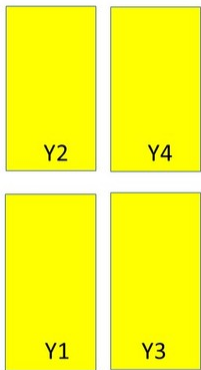

Array	Freq (MHz)	Conns	RET (SRET)	AISG RET UID
Y1	1695-2690	1-2	1	CPXXXXXXXXXXXXXXXXY1
Y2	1695-2690	3-4	2	CPXXXXXXXXXXXXXXXXY2
Y3	1695-2690	5-6	3	CPXXXXXXXXXXXXXXXXY3
Y4	1695-2690	7-8	4	CPXXXXXXXXXXXXXXXXY4

Bottom

(Sizes of colored boxes are not true depictions of array sizes)

Port Configuration

2VV-33C-R4-V5



Electrical Specifications

Impedance	50 ohm
Operating Frequency Band	1695 – 2690 MHz
Polarization	±45°
Total Input Power, maximum	1,200 W @ 50 °C

Electrical Specifications

Frequency Band, MHz	1695–1880	1850–1990	1920–2180	2300–2500	2500–2690
Gain, dBi	19.2	19.4	19.7	19.9	20.1
Beam Centers, Horizontal, degrees	±27	±27	±27	±27	±27
Beamwidth, Horizontal, degrees	38	38	37	34	31
Beamwidth, Vertical, degrees	7.8	7.4	7	6.2	5.8
Beam Tilt, degrees	2–12	2–12	2–12	2–12	2–12
USLS (First Lobe), dB	18	17	18	23	23
Front-to-Back Ratio at 180°, dB	32	37	37	37	36
Isolation, Cross Polarization, dB	30	30	30	30	30

2VV-33C-R4-V5

Isolation, Inter-band, dB	30	30	30	30	30
VSWR Return loss, dB	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-150	-150	-150	-150	-150
Input Power per Port at 50°C, maximum, watts	200	200	200	200	200

Electrical Specifications, BASTA

Frequency Band, MHz	1695–1880	1850–1990	1920–2180	2300–2500	2500–2690
Gain by all Beam Tilts, average, dBi	18.8	19	19.3	19.5	19.7
Gain by all Beam Tilts Tolerance, dB	±0.6	±0.4	±0.5	±0.5	±0.5
Gain by Beam Tilt, average, dBi	2° 18.9 7° 18.8 12° 18.6	2° 19.2 7° 19.1 12° 18.7	2° 19.4 7° 19.4 12° 19.0	2° 19.6 7° 19.6 12° 19.3	2° 19.8 7° 19.8 12° 19.5
Beamwidth, Horizontal Tolerance, degrees	±2	±1.7	±2.4	±2.4	±1.8
Beamwidth, Vertical Tolerance, degrees	±0.4	±0.3	±0.5	±0.3	±0.2
USLS, beampeak to 20° above beampeak, dB	17	16	16	18	18
Front-to-Back Total Power at 180° ± 30°, dB	23	27	28	29	27
CPR at Boresight, dB	24	28	23	22	20
CPR at 10 dB Horizontal Beamwidth, dB	12	12	12	9	9

Mechanical Specifications

Effective Projective Area (EPA), frontal	0.49 m ² 5.274 ft ²
Effective Projective Area (EPA), lateral	0.36 m ² 3.875 ft ²
Mechanical Tilt Range	0°–12°
Wind Loading @ Velocity, frontal	525.0 N @ 150 km/h (118.0 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	386.0 N @ 150 km/h (86.8 lbf @ 150 km/h)
Wind Loading @ Velocity, maximum	898.0 N @ 150 km/h (201.9 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	540.0 N @ 150 km/h (121.4 lbf @ 150 km/h)
Wind Speed, maximum	241 km/h (150 mph)

Packaging and Weights

Width, packed	505 mm 19.882 in
----------------------	--------------------

2VV-33C-R4-V5

Depth, packed	386 mm 15.197 in
Length, packed	2631 mm 103.583 in
Weight, gross	44.5 kg 98.106 lb

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant



Included Products

BSAMNT-3	–	Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.
----------	---	--

* Footnotes

Performance Note	Severe environmental conditions may degrade optimum performance
-------------------------	---

BSAMNT-3



Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.

Product Classification

Product Type Downtilt mounting kit

General Specifications

Application Outdoor

Color Silver

Dimensions

Compatible Diameter, maximum 115 mm | 4.528 in

Compatible Diameter, minimum 60 mm | 2.362 in

Weight, net 6.2 kg | 13.669 lb

Material Specifications

Material Type Galvanized steel

Packaging and Weights

Included Brackets | Hardware

Packaging quantity 1

Weight, gross 6.4 kg | 14.11 lb

Regulatory Compliance/Certifications

Agency	Classification
CE	Compliant with the relevant CE product directives
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant

BSAMNT-3

