

884036614/10 | CS37Z3 GRN C6 4/23 U/UTP CPK 305M

Category 6 U/UTP Cable, low smoke zero halogen, green jacket, 4 pair count, 1000 ft (305 m) length Commpak

Product Classification

Regional Availability	Asia
Portfolio	NETCONNECT®
Product Type	Twisted pair cable
Ordering Note	Available in Asia Pacific


General Specifications

Product Number	CS37Z3
ANSI/TIA Category	6
Cable Component Type	Horizontal
Cable Type	U/UTP (unshielded)
Conductor Type, singles	Solid
Conductors, quantity	8
Jacket Color	Green
Note	All electrical transmission tests include swept frequency measurements Testing Frequency up to 600 MHz
Pairs, quantity	4
Separator Type	Isolator
Transmission Standards	ANSI/TIA-568.2-D CENELEC EN 50288-6-1 ISO/IEC 11801 Class E

Dimensions

Cable Length	304.8 m 1000 ft
Diameter Over Insulated Conductor	1.039 mm 0.041 in
Diameter Over Jacket, nominal	5.842 mm 0.23 in
Jacket Thickness	0.559 mm 0.022 in
Conductor Gauge, singles	23 AWG

Cross Section Drawing

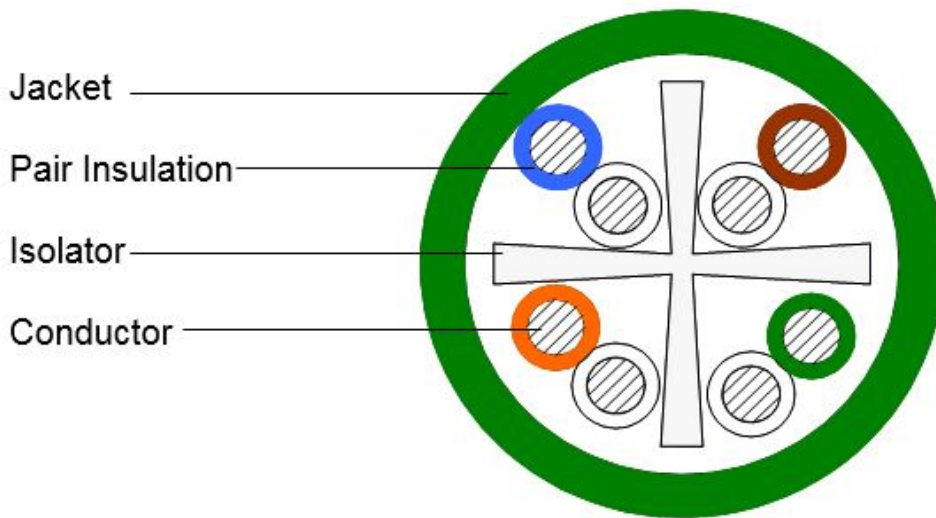

Electrical Specifications

Characteristic Impedance	100 ohm
dc Resistance Unbalance, maximum	5 %
dc Resistance, maximum	7.61 ohms/100 m 2.32 ohms/100 ft
Delay Skew, maximum	45 ns
Dielectric Strength, minimum	1500 Vac 2500 Vdc
Mutual Capacitance at Frequency	5.6 nF/100 m @ 1 kHz
Nominal Velocity of Propagation (NVP)	68 %
Operating Frequency, maximum	400 MHz
Operating Voltage, maximum	80 V
Remote Powering	Fully complies with the recommendations set forth by IEEE 802.3bt (Type 4) for the safe delivery of power over LAN cable when installed according to ISO/IEC 14763-2, CENELEC EN 50174-1, CENELEC EN 50174-2 or TIA TSB-184-A
Safety Voltage Rating	300 V

Electrical Cable Performance

CS	CommScope	NEXT	Near End Crosstalk (dB/100m)
STD	Refers to the standard value listed under Transmission Standards in the Electrical Specifications above	PSNEXT	Power Sum Near End Crosstalk (db/100m)
TYP	Typical Electrical Performance	ACRF	Attenuation to Crosstalk Ratio - Far End (dB/100m)
IL	Insertion Loss (dB/100m)	RL	Return Loss (dB)
ACR	Attenuation to Crosstalk Ratio (dB/100m)	ELTCTL	Equal Level Transverse Conversion Transfer Loss (dB/100m)
PSACR	Power Sum Attenuation to Crosstalk Ratio (dB/100m)		
PSACRF	Power Sum Attenuation to Crosstalk Ratio - Far End (dB/100m)		
TCL	Transverse Conversion Loss (dB/100m)		

Freq. MHz	IL			NEXT			ACR			PSNEXT			PSACR			ACRF			PSACRF			RL			TCL			ELTCTL		
	CS	STD	TYP	CS	STD	TYP	CS	STD	TYP	CS	STD	TYP	CS	STD	TYP	CS	STD	TYP	CS	STD	TYP	CS	STD	TYP	CS	STD	TYP	CS	STD	TYP
1	2	2	1.7	77.3	74.3	88.9	75.3	72.3	87.2	75.3	72.3	87.1	73.3	70.3	85.4	68.8	67.8	83.9	65.8	64.8	82.5	20	20	33.5	40	40	65.4	35	35	65.2
4	3.8	3.8	3.5	68.3	65.3	81.2	64.5	61.5	77.7	66.3	63.3	79.1	62.5	59.5	75.6	56.8	55.8	72.2	53.8	52.8	70.9	23.6	23	34.2	40	40	60	23	23	60
8	5.3	5.3	5	63.8	60.8	76.3	58.5	55.4	71.3	61.8	58.8	74.3	56.5	53.4	69.3	50.7	49.7	66.3	47.7	46.7	64.9	25.4	24.5	33.5	40	40	56.2	16.9	16.9	55.9
10	5.9	6	5.6	62.3	59.3	74.6	56.4	53.3	69	60.3	57.3	72.7	54.4	51.3	67.1	48.8	47.8	64.3	45.8	44.8	63	26	25	33.1	40	40	54.7	15	15	54.4
16	7.5	7.6	7.1	59.2	56.2	71.8	51.7	48.7	64.7	57.2	54.2	69.7	49.7	46.7	62.7	44.7	43.7	60.2	41.7	40.7	58.8	26	25	34.2	38	38	50.5	10.9	10.9	50.3
20	8.4	8.5	7.9	57.8	54.8	70.2	49.4	46.3	62.3	55.8	52.8	68.2	47.4	44.3	60.3	42.8	41.8	58.2	39.8	38.8	56.8	26	25	34.9	37	37	50	9	9	50.1
25	9.4	9.5	8.9	56.3	53.3	68.4	46.9	43.8	59.5	54.3	51.3	66.4	44.9	41.8	57.5	40.8	39.8	56.3	37.8	36.8	54.9	25.3	24.3	35	36	36	48.7	7	7	48.6
31.25	10.6	10.7	10	54.9	51.9	67	44.3	41.2	57	52.9	49.9	65	42.3	39.2	55	38.9	37.9	54.4	35.9	34.9	53	24.6	23.6	34	35.1	35.1	48.7			
62.5	15.3	15.4	14.2	50.4	47.4	62.1	35.1	32	47.8	48.4	45.4	60.2	33.1	30	46	32.9	31.9	48.7	29.9	28.9	47.1	22.5	21.5	31.3	32	32	49.7			
100	19.7	19.8	18.2	47.3	44.3	58.6	27.6	24.5	40.4	45.3	42.3	56.7	25.6	22.5	38.5	28.8	27.8	44.6	25.8	24.8	43.2	21.1	20.1	28.6	30	30	47.6			
155	25	25.2	22.9	44.4	41.4	55.3	19.5	16.3	32.4	42.4	39.4	53.5	17.5	14.3	30.6	25	24	40.7	22	21	39.3	19.8	18.8	26.3	28.1	28.1	45.2			
200	28.8	29	26.2	42.8	39.8	53.5	14	10.8	27.3	40.8	37.8	51.7	12	8.8	25.5	22.8	21.8	38.1	19.8	18.8	36.8	19	18	25.3	27	27	43.3			
250	32.6	32.8	29.5	41.3	38.3	52.3	8.7	5.5	22.8	39.3	36.3	50.4	6.7	3.5	20.8	20.8	19.8	35.8	17.8	16.8	34.5	18.3	17.3	23.5	26	26	42.2			
300	36.2		32.5	40.1		51	4		18.4	38.1		49.1	2		16.6	19.3		34.3	16.3		32.9	17.8		22.1			40.9			
350	39.5		35.3	39.1		50	-0.4		14.7	37.1		48.1	-2.4		12.8	17.9		33.2	14.9		31.8	17.3		21.2			39.8			
400	42.7		38	38.3		48.8	-4.4		10.8	36.3		47	-6.4		9	16.8		31.8	13.8		30.6	16.9		20.5			38.2			
500			43			47			4			45.2			2.2			29.9			28.4			18.7			36.8			
550			45.3			46.4			1.1			44.5			-0.8			28.8			27.4			18.6			36.5			
650			49.7			43.5			-6.2			41.9			-7.9			26.6			25.1			17.6						

Material Specifications

Conductor Material	Bare copper
Insulation Material	Polyolefin
Jacket Material	Low Smoke Zero Halogen (LSZH)
Separator Material	Polyolefin

Mechanical Specifications

Pulling Tension, maximum 11.34 kg | 25 lb

Environmental Specifications

884036614/10 | CS37Z3 GRN C6 4/23 U/UTP CPK 305M

Installation temperature	0 °C to +60 °C (+32 °F to +140 °F)
Operating Temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Acid Gas Test Method	IEC 60754-2
Environmental Space	Low Smoke Zero Halogen (LSZH)
Flame Test Method	IEC 60332-3-22
Smoke Test Method	IEC 61034-2

Packaging and Weights

Cable weight	37.249 kg/km 25.03 lb/kft
Packaging Type	CommPak® box

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant

