


O-720-LA-RB-F12NS/8V/93C

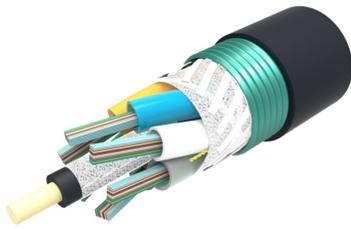

Fiber OSP cable, Steel Armored, Gel-Filled Loose Tube Ribbon, 720 fiber, Singlemode G.657.A2, Feet jacket marking, Black jacket color

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	CommScope®
Product Type	Fiber OSP cable
Product Series	O-LA

General Specifications


Armor Type	Corrugated steel
Cable Type	Ribbon loose tube
Construction Type	Armored
Subunit Type	Gel-filled
Fibers per Ribbon, quantity	12
Jacket Color	Black
Jacket Marking	Feet
Total Fiber Count	720

Dimensions

Cable Length	3515 m 11,532.153 ft
Buffer Tube/Subunit Diameter	7.9 mm 0.311 in
Diameter Over Jacket	29.8 mm 1.173 in

Representative Image

O-720-LA-RB-F12NS/8V/93C

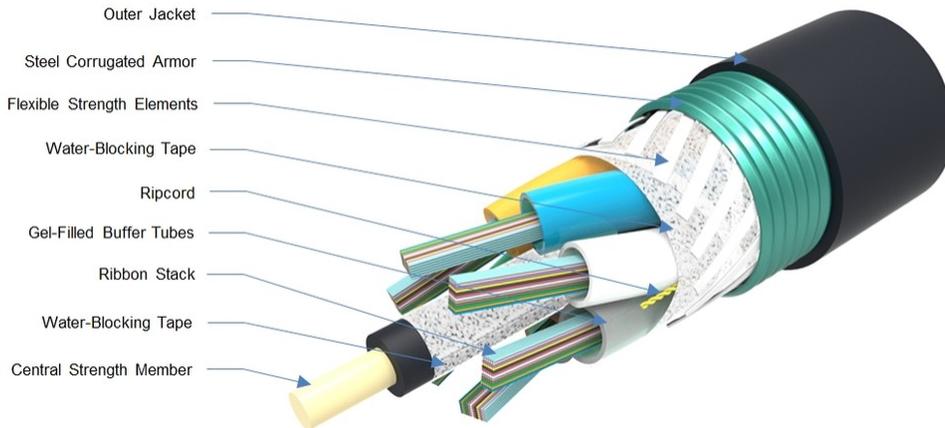

Mechanical Specifications

Minimum Bend Radius, loaded	235 mm 9.252 in
Minimum Bend Radius, unloaded	298 mm 11.732 in
Tensile Load, long term, maximum	800 N 179.847 lbf
Tensile Load, short term, maximum	4500 N 1,011.64 lbf
Compression	22 N/mm 125.623 lb/in
Compression Test Method	FOTP-41 IEC 60794-1 E3
Flex	25 cycles
Flex Test Method	FOTP-104 IEC 60794-1 E6
Impact	2.94 N-m 26.021 in lb
Impact Test Method	FOTP-25 IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33 IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85 IEC 60794-1 E7

Optical Specifications

Fiber Type	G.657.A2 G.657.A2, TeraSPEED®
-------------------	---------------------------------

Environmental Specifications

Installation temperature	-30 °C to +60 °C (-22 °F to +140 °F)
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)

O-720-LA-RB-F12NS/8V/93C

Storage Temperature	-40 °C to +75 °C (-40 °F to +167 °F)
Cable Qualification Standards	ANSI/ICEA S-87-640 RUS PE-90 (7CFR 1755.900) Telcordia GR-20
Environmental Space	Aerial, lashed Buried
Jacket UV Resistance	UV stabilized
Water Penetration	24 h
Water Penetration Test Method	FOTP-82 IEC 60794-1 F5

Environmental Test Specifications

Drip	70 °C 158 °F
Drip Test Method	FOTP-81
Heat Age	-40 °C to +85 °C (-40 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	-30 °C to +60 °C (-22 °F to +140 °F)
Low High Bend Test Method	FOTP-37 IEC 60794-1 E11
Temperature Cycle	-40 °C to +70 °C (-40 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3 IEC 60794-1 F1

Packaging and Weights

Cable weight	618 kg/km 415.277 lb/kft
---------------------	----------------------------

Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable