
	4		3		2				1		
F		ELEASED FOR PUBLICATION	RE THE PROPRIETARY PROPERTY OF COMMSCOPE, INC.	l				REVISIONS			
_) 2016 COMMSCOPE, INC. CONFIDENTIAL AND M	MAY BE USED ONLY FOR THE SPECIFIC PURPO	SE AUTHORIZED IN WRITING BY COMMSCOPE, INC.		J	Ρ	LTR	DESCRIPTION	DATE	DWN	APVD
						\square	D	ECR-15-002896	26FEB2015	RM	Sſ
							E	REV PER BNS_CD_BRAND	02FEB2017	GG	DC
D	1. RJ45 CATEGORY 5E PATCH CABLE ASSE	EMBLIES ARE									
	USED AS PATCH LEADS IN GENERIC CU										
	CABLING ACCORDING TO ISO/IEC 11801. BE USED AS WORKSTATION/EQUIPMENT										
	CHANNEL PERFORMANCE.										
	2. EACH ASSEMBLY IS SUPPLIED IN A CL										
	Z, EALT ASSEMBLT IS SUPPLIED IN A LL	LAK DAU.									-

3. FOR AVAILABLE DASH LENGHTS, DIM A SEE COMMSCOPE CATALOG.

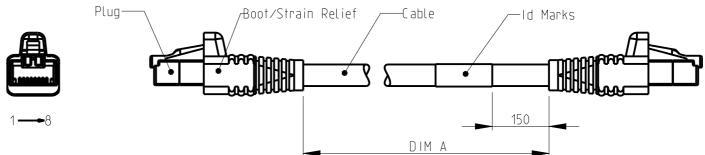

	ONTROLLED DOCUMENT.	DWN 30 JAN2007 J.GATNAU снк 30 JAN2007 M.MAQUEDA		
DIMENSIONS :	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD 30JAN2007 J.SANABRA	NAME	R
	0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-	product spec <u>108-93009</u> APPLICATION SPEC -	SIZE	CAGE
MATERIAL _	FINISH -	WEIGHT -	A 3	-
-	_	Customer Drawing		

С

В

А



D

С

В

COMMSCOPE, INC. I/E DATCH CADLE ACCEMPLY

		lable a P, LSZH,			W HITE	А
GE CODE	DRAWING NO			RES	TRICTED TO	
-	C =164	4077			-	
		SCALE _	SHEET	1 ^{OF} 1	REV F	