


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION

© 2016 COMMSCOPE, INC. CONFIDENTIAL NOTICE: THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPRIETARY PROPERTY OF COMMSCOPE, INC. AND MAY BE USED ONLY FOR THE SPECIFIC PURPOSE AUTHORIZED IN WRITING BY COMMSCOPE, INC.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C1	DWG HAS BEEN UPDATED	03-Aug-09	JG	JS
	C2	Description Cat.6 was Class Ea	02-Dec-09	JG	JS
	D	REV PER BNS_CD_BRAND	02FEB2017	GG	DC

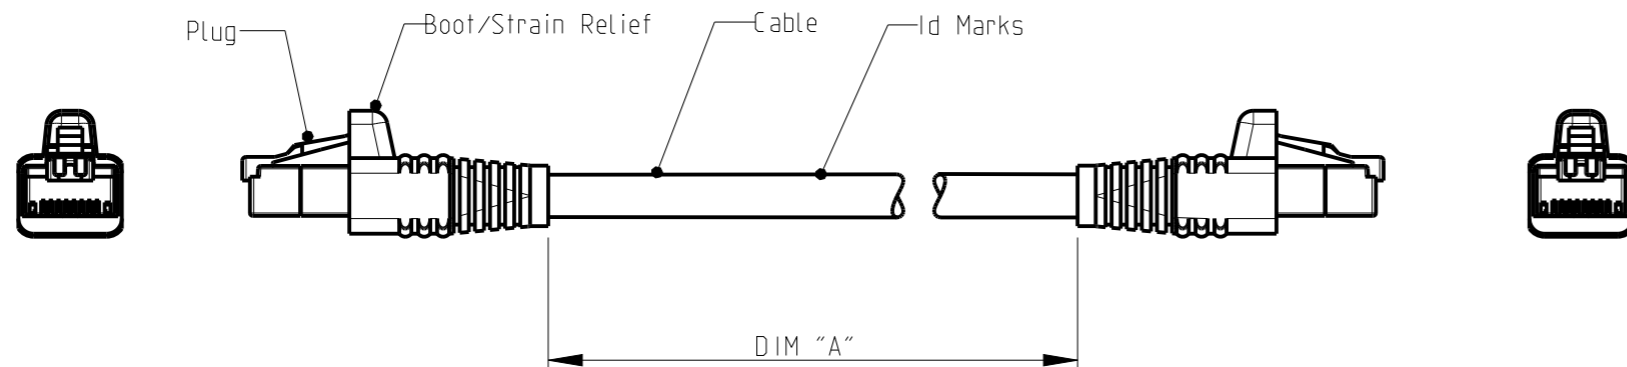

SCHEMATIC VIEW

1. RJ45 Cat.6 PATCH CABLE ASSEMBLIES ARE USED AS PATCH LEADS IN GENERIC CUSTOMER PREMISES CABLING ACCORDING TO ISO/IEC 11801. THEY CAN ALSO BE USED AS WORKSTATION/EQUIPMENT LEADS TO MAINTAIN CHANNEL PERFORMANCE.
2. FOR AVAILABLE DASH LENGTHS, DIM A SEE THE COMMSCOPE CATALOG

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.GATNAU 03-Aug-09	<h1 style="text-align: center;">COMMSCOPE, INC.</h1> <p style="text-align: center;">PATCH CORD RJ45 Cat.6 S/FTP PIMF600 LSZH STRANDED BLUE</p>													
DIMENSIONS: mm		CHK M.MAQUEDA 03-Aug-09				NAME										
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J.SANABRA 03-Aug-09				SIZE										
<table border="0"> <tr><td>0 PLC</td><td>±</td></tr> <tr><td>1 PLC</td><td>±</td></tr> <tr><td>2 PLC</td><td>±</td></tr> <tr><td>3 PLC</td><td>±</td></tr> <tr><td>4 PLC</td><td>±</td></tr> <tr><td>ANGLES</td><td>±</td></tr> </table>		0 PLC				±	1 PLC	±	2 PLC	±	3 PLC	±	4 PLC	±	ANGLES	±
0 PLC	±															
1 PLC	±															
2 PLC	±															
3 PLC	±															
4 PLC	±															
ANGLES	±															
MATERIAL -		FINISH -	APPLICATION SPEC -	DRAWING NO C-1711079	RESTRICTED TO -											
		WEIGHT -	SCALE -		SHEET 1 OF 1											
		CUSTOMER DRAWING		REV D												