


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	ECR-09-013427	19-Jun-09	JG	JS
	D1	DWG HAS BEEN UPDATED	03-Aug-09	JG	JS
	E	REV PER BNS_CD_BRAND	02FEB2017	GG	DC

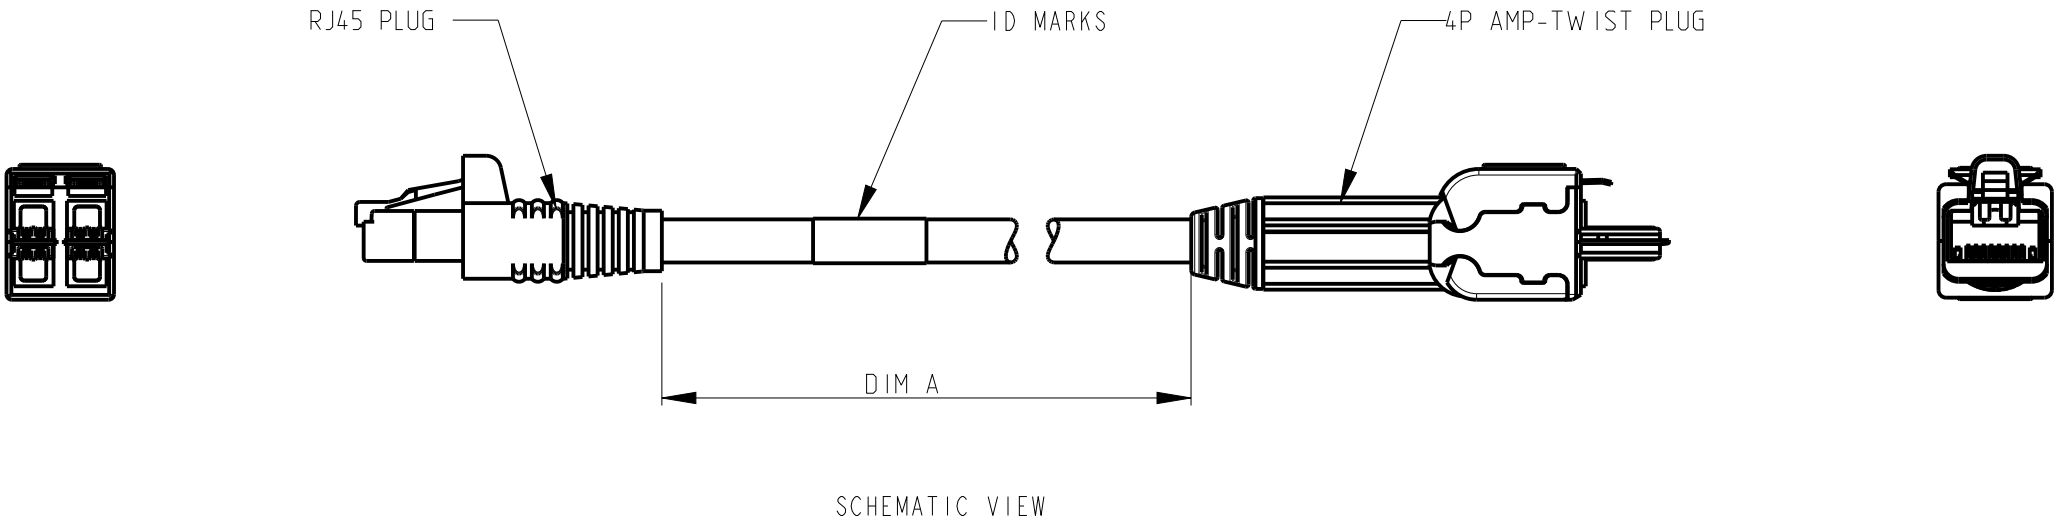

1. 4 PAIR RJ45/AMP-TWIST Cat 6A PATCH CABLE ASSEMBLIES ARE USED AS HYBRID PATCH LEADS IN GENERIC CUSTOMER PREMISES CABLING ACCORDING TO ISO/IEC 11801. THEY CAN ALSO BE USED AS WORKSTATION/EQUIPMENT LEADS TO MAINTAIN CHANNEL PERFORMANCE.
2. FOR AVAILABLE DASH LENGTHS, DIM A, SEE THE COMMScope CATALOGUE OR CONTACT YOUR SALES REPRESENTATIVE.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:  
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	±

MATERIAL

-

FINISH

-

DWN  
J.GATNAU  
03-Aug-09

CHK  
M.MAQUEDA  
03-Aug-09

APVD  
J.SANABRA  
03-Aug-09

PRODUCT SPEC  
108-93021

APPLICATION SPEC  
-

WEIGHT  
-

CUSTOMER DRAWING

SCALE  
-

SHEET  
1 OF 1

REV  
E

COMMScope, INC.

NAME  
PATCH CORD AMP-TWIST 7AS / RJ45  
Cat 6a  
S/FTP, LSZH, STRANDED, WHITE

SIZE  
A3

CAGE CODE  
-

DRAWING NO  
C-336488

RESTRICTED TO  
-

1470