TFAH-US7B/100-14



ION®-B Series High Power Remote Unit for Cellular 700, LMR 800, Cellular 850, LMR 900, AWS and PCS 1900

OBSOLETE

Product Classification

Product Type Remote unit

Product Brand ION®-B

General Specifications


Note Detailed Product Specifications are available. Please contact your

local CommScope representative.

Power Class High

Dimension Drawing

TFAH-US7B/100-14

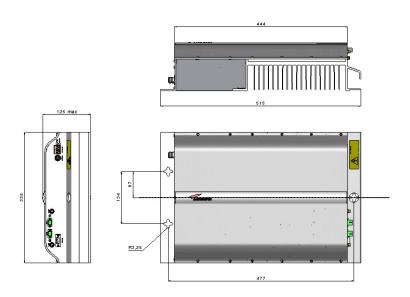

Electrical Specifications

Impedance 50 ohm

License Band AWS | CEL 850 | Cellular 700 | LMR 800 | LMR 900 | PCS

1900 Extended

Voltage Range 85 to 265 Vac

Electrical Specifications, Rx (Uplink)

Operating Frequency Band1710 – 1755 MHz (AWS 1700) | 1850 – 1915 MHz (PCS 1900) | 1710 – 1755 MHz (AWS 1700) | 1710 – 1715 MHz (PCS 1900) | 1710 – 1710 MHz (

Extended) | 698 - 716 MHz (Cellular 700) | 776 - 787 MHz (Cellular 700) | 806 - 824 MHz (LMR 800) | 824 - 848.5 MHz

(Cellular 850) | 896.5 – 902 MHz (LMR 900)

Electrical Specifications, Tx (Downlink)

Operating Frequency Band 1930 – 1995 MHz (PCS 1900 Extended) | 2110 – 2155 MHz (AWS

1700) | 728 - 757 MHz (Cellular 700) | 851.5 - 869 MHz (LMR 800) | 869 - 893.5 MHz (Cellular 850) | 929 - 941 MHz (LMR

900)

Regulatory Compliance/Certifications

Agency Classification

Page 2 of 3

TFAH-US7B/100-14

ISO 9001:2015

Designed, manufactured and/or distributed under this quality management system



Included Products

TPSN3/28-130 - Power Supply Adapter ION®-B Series Remote Units, 130

W

