

Fiber OSP cable, Zero Water Peak® Blown Micro Single Jacket All-Dielectric Outdoor Stranded Loose Tube 200um Fiber Arid-Core™ Construction, 288 fiber, Singlemode G.657.A1, Gel-filled, Feet jacket marking, Black jacket color

- \*Product complies with the Build America, Buy America Act (BABAA) requirements of the Infrastructure Investment and Jobs Act of 2021 (Pub. L. 117- 58, §§ 70901-70953), or is the subject of a waiver approved by the Secretary of Commerce or designee. Compliance requirements and waiver applicability vary based on government funding program. Check the laws and regulations for your specific program.

Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America
Portfolio	CommScope®
Product Type	Fiber OSP cable
Product Series	B-LN
Government Requirements	Build America Buy America (BABA) compliant*

General Specifications

Cable Type	Stranded loose tube
Construction Type	Non-armored
Subunit Type	Gel-filled
Filler, quantity	0
Jacket Color	Black
Jacket Marking	Feet
Jacket Marking Method	Laser
Jacket Marking Text	COMMScope GB (YYYY) 810009731/DB 288 X G657A1 200um (Serial number) (feet) FT
Location of Manufacturing	Claremont, North Carolina
Subunit, quantity	12
Fibers per Subunit, quantity	24
Total Fiber Count	288


Dimensions

Buffer Tube/Subunit Diameter	1.7 mm   0.067 in
------------------------------	-------------------

810009731/DB | B-288-LN-8W-F24NS/17G/200

Diameter Over Jacket9.4 mm | 0.37 in

Representative Image

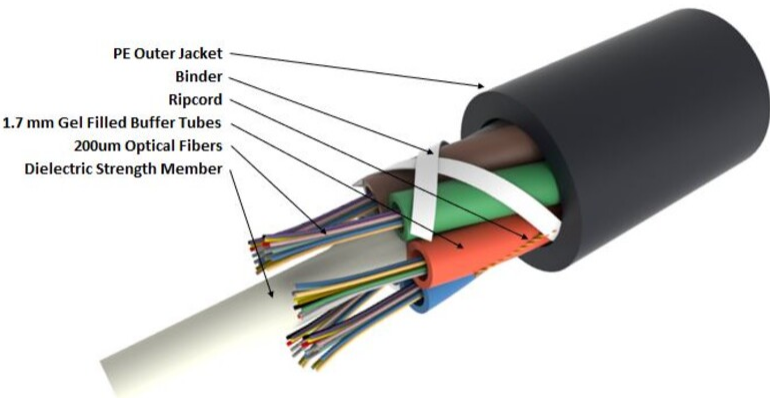

Material Specifications

Jacket MaterialHigh density polyethylene (HDPE)

Mechanical Specifications

Minimum Bend Radius, loaded	143 mm   5.63 in
Minimum Bend Radius, unloaded	95 mm   3.74 in
Tensile Load, long term, maximum	335 N   75.311 lbf
Tensile Load, short term, maximum	1000 N   224.809 lbf
Compression	10 N/mm   57.101 lb/in
Compression Test Method	FOTP-41   IEC 60794-1 E3
Flex	25 cycles
Flex Test Method	FOTP-104   IEC 60794-1 E6
Impact	0.3 N-m   2.655 in lb
Impact Test Method	FOTP-25   IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33   IEC 60794-1 E1

810009731/DB | B-288-LN-8W-F24NS/17G/200

Twist	10 cycles
Twist Test Method	FOTP-85   IEC 60794-1 E7
Vertical Rise, maximum	769 m   2,522.966 ft

### Optical Specifications

Fiber Type	G.657.A1, TeraSPEED®
------------	----------------------

### Environmental Specifications

Installation temperature	-30 °C to +70 °C (-22 °F to +158 °F)
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Cable Qualification Standards	IEC 60794-5-10
Environmental Space	Air-blown, microduct
Jacket UV Resistance	UV stabilized
Water Penetration	24 h
Water Penetration Test Method	FOTP-82   IEC 60794-1 F5

### Environmental Test Specifications

Cable Freeze	-2 °C   28.4 °F
Cable Freeze Test Method	FOTP-98   IEC 60794-1 F15
Drip	70 °C   158 °F
Drip Test Method	FOTP-81   IEC 60794-1 E14
Heat Age	-40 °C to +85 °C (-40 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	-30 °C to +60 °C (-22 °F to +140 °F)
Low High Bend Test Method	FOTP-37   IEC 60794-1 E11
Temperature Cycle	-40 °C to +70 °C (-40 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3   IEC 60794-1 F1

### Packaging and Weights

Cable weight	77.5 kg/km   52.078 lb/kft
--------------	----------------------------

### Included Products

CS-8W-200-B-LN	–	200 Micron Low Macrobending, Zero Water Peak, Dispersion-Unshifted Singlemode
----------------	---	---

# 810009731/DB | B-288-LN-8W-F24NS/17G/200

---

Fiber

## \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable

# CS-8W-200-B-LN

200 Micron Low Macrobending, Zero Water Peak, Dispersion-Unshifted Singlemode Fiber

## Product Classification

Portfolio	CommScope®
Product Type	Optical fiber

## General Specifications

Cladding Diameter	125 µm
Cladding Diameter Tolerance	±0.7 µm
Cladding Non-Circularity, maximum	0.7 %
Coating Diameter (Colored)	200 µm
Coating Diameter (Uncolored)	190 µm
Coating Diameter Tolerance (Colored)	±10 µm
Coating Diameter Tolerance (Uncolored)	±10 µm
Coating/Cladding Concentricity Error, maximum	12 µm
Core/Clad Offset, maximum	0.5 µm
Proof Test	689.476 N/mm²   100000 psi

## Dimensions

Fiber Curl, minimum	4 m   13.123 ft
---------------------	-----------------

## Mechanical Specifications

Macrobending, 20 mm Ø mandrel, 1 turn	0.75 dB @ 1,550 nm   1.50 dB @ 1,625 nm
Macrobending, 30 mm Ø mandrel, 10 turns	0.25 dB @ 1,550 nm   1.00 dB @ 1,625 nm
Macrobending, 60 mm Ø mandrel, 100 turns	0.05 dB @ 1,550 nm   0.05 dB @ 1,625 nm
Coating Strip Force, maximum	8.9 N   2.001 lbf
Coating Strip Force, minimum	0.5 N   0.112 lbf
Dynamic Fatigue Parameter, minimum	20

## Optical Specifications

Cabled Cutoff Wavelength, maximum	1260 nm
Point Defects, maximum	0.05 dB
Zero Dispersion Slope, maximum	0.09 ps/[km-nm-nm]

# CS-8W-200-B-LN

Zero Dispersion Wavelength, maximum	1324 nm
Zero Dispersion Wavelength, minimum	1300 nm
Optical Specifications, Wavelength Specific	
Attenuation, maximum	0.25 dB/km @ 1,550 nm   0.29 dB/km @ 1,625 nm   0.35 dB/km @ 1,310 nm   0.36 dB/km @ 1,385 nm
Attenuation, typical	0.19 dB/km @ 1,550 nm   0.33 dB/km @ 1,310 nm
Dispersion, maximum	18 ps(nm-km) at 1550 nm   3.5 ps(nm-km) from 1285 nm to 1330 nm at 1310 nm
Index of Refraction	1.467 @ 1,310 nm   1.467 @ 1,385 nm   1.468 @ 1,550 nm
Mode Field Diameter	10.4 μm @ 1,550 nm   9.2 μm @ 1,310 nm   9.6 μm @ 1,385 nm
Mode Field Diameter Tolerance	±0.4 μm @ 1310 nm   ±0.5 μm @ 1550 nm   ±0.6 μm @ 1385 nm
Polarization Mode Dispersion Link Design Value, maximum	0.04 ps/sqrt(km)
Standards Compliance	ITU-T G.652.D   ITU-T G.657.A1   TIA-492CAAB (OS2)

## Environmental Specifications

Heat Aging, maximum	0.05 dB/km @ 85 °C
Temperature Dependence, maximum	0.05 dB/km
Temperature Humidity Cycling, maximum	0.05 dB/km
Water Immersion, maximum	0.05 dB/km @ 23 °C

## \* Footnotes

Temperature Dependence, maximum	Temperature dependence is conducted at -60 °C to +85 °C (-76 °F to +185 °F)
Temperature Humidity Cycling, maximum	Temperature humidity cycling is conducted at -10 °C to +85 °C (+14 °F to +185 °F) up to 95% relative humidity