

4

 $\left(\right)$

В

2


4

А

RIGHT VIEW					1
			WASHER	8	
			10-32 MACHINE SCREW	2	
			GROUND WASHER	2	
		0 3	6-32 SCREW	8	3
		015	CLAMP YOKE	2	
		016	CABLE CLAMP COVER		
		017	SCREW 6-32X3/4	2	
		018	CABLE CLAMP BRACKET		
		019	SCREW 6-32,.250 POU	2	
EL CAN BE MOUNTED AT 2", 5" OR 8" DEPTHS IN I9 OR 23" KS USING WECO OR EIA PATTERNS		020	STANDOFF	2	
		021	WASHER FLAT 1/4 SS	2	
OVE VERTICAL CABLE GUIDE FOR 2" RECESS MOUNT.			N 25-00 /4-20	2	
LE CLAMP IS INCLUDED WITH CHASSIS (0.2-0.7) O.D.			GROUNDING TERMINAL	2	
			SPIRAL WRAP 5	4 F T	
YCARBONATE FRONT DOOR.		025	VCG	2	1
FOR CABLE RIBBON ENTRY.			CABLE SHIELD	2	
CYCTEM CAN ONLY DE INSTALLED WHEN THE NOUNTING			EDGE PROTECTOR	10	1
SYSTEM CAN ONLY BE INSTALLED WHEN THE MOUNTING CKETS ARE ON 5" OR 8" POSITIONS.			SHIELD MOUNTING BRACKET	2	14
		029	6-32,.250 SCREW	4	
	© 2016 COMMSCOPE, INC.CONFIDENTIAL NOTICE: THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPRIATARY PROPERTY OF COMMSCOPE, INC.AND MAY BE USED ONLY FOR THE SPECIFIC PURPOSE AUTHORIZED IN WRITING BY COMMSCOPE, INC.	INST DWG, IRU FRONT ACCESS PANEL			
COMMSCOPE, INC.	ALL DIMS AND TOLERANCES .XX:±N/A ARE INCHES UNLESS .XXX:±N/A OTHERWISE SPECIFIED ANGULAR:±N/A	C s i ze	drawing number 300100105477	E rev	
	DO NOT SCALE DRAWING ENGR: R.	CAZARES SHT. OF 3		3	
			v I		i -

 (\oplus)

DIMENSIONS IN INCHES THIRD ANGLE PROJECTION

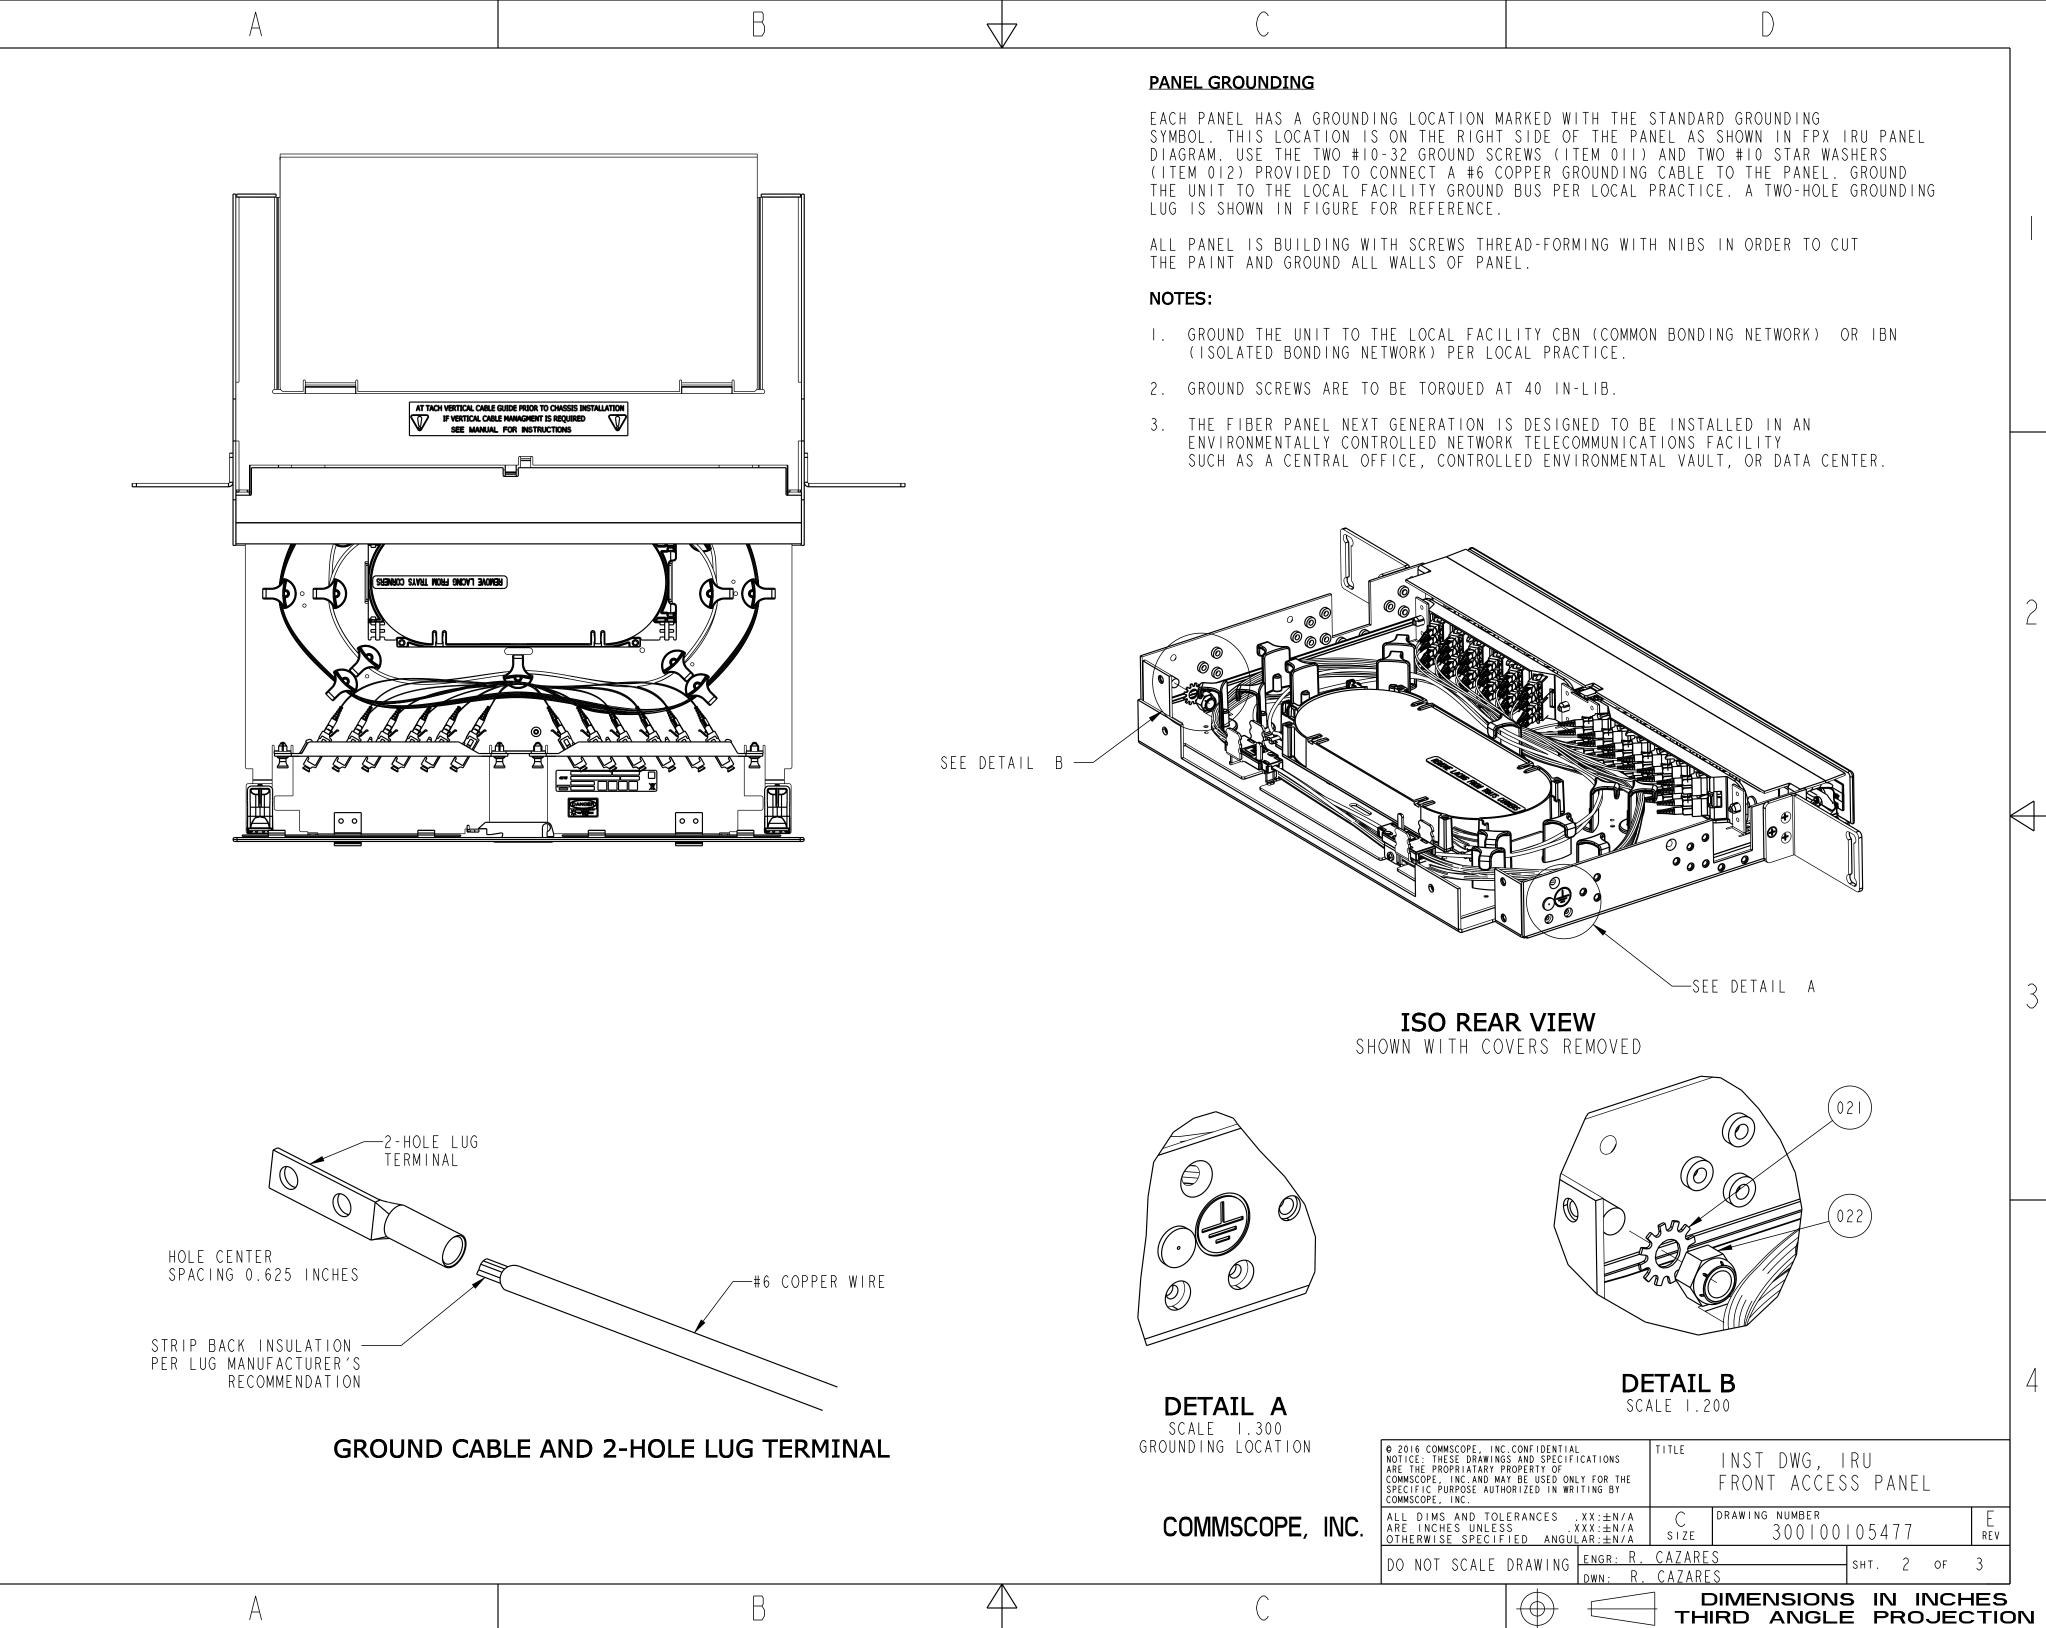

\bigcup	
PANEL GROUNDING	

