1155163-2 | OFDC-B8G-RAT-16F-20M-KIT-NZ1



OFDC B8G Fiber Optic Splice/Patch Closure, X-press version, Gel Cable sealing, 1 pre-installed 18-fiber splice tray, 8 duplex LC/APC adapters, 20 m drop cable assy, mobra

- Advanced gel sealing technology ensures fast and easy field handling without a need for special tools
- Individual access to drop cable connection area and seperate zones for looped cable storage for most cable types
- Compact and modular design suited for wraparound drop cable installation, enabling faster deployments
- Allows easy pass-through cabling and integration of optical components, even at later deployment stages

Product Classification

Regional Availability Australia/New Zealand

Product Type Single-ended, rectangular fiber closure

Product Series OFDC

General Specifications

Cable Sealing Type Compressed gel

Color Black

Mounting Manhole | Pedestal | Strand | Wall

Dimensions

 Height
 128 mm | 5.039 in


 Width
 156 mm | 6.142 in

 Length
 324 mm | 12.756 in

Ordering Tree



1155163-2 | OFDC-B8G-RAT-16F-20M-KIT-NZ1

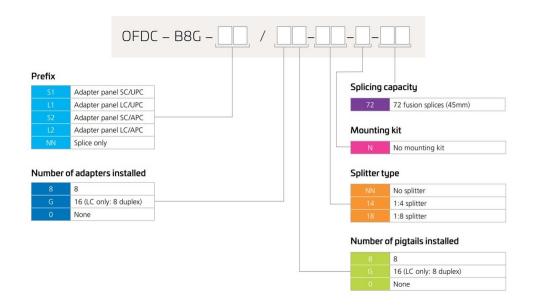

Material Specifications

Material Type Rugged polymer

Environmental Specifications

Installation temperature $-5 \,^{\circ}\text{C}$ to +45 $^{\circ}\text{C}$ (+23 $^{\circ}\text{F}$ to +113 $^{\circ}\text{F}$)

Storage Temperature -30 °C to +60 °C (-22 °F to +140 °F)

Relative Humidity 93%, non-condensing

Environmental Space Above ground | Below ground

Qualification Standards IEC 60529, IP68 + 2 m waterhead

UV Resistance UV stabilized

Packaging and Weights

Packaging quantity 1

Packaging Type Box | Carton

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance



1155163-2 OFDC-B8G-RAT-16F-20M-KIT-NZ1

ROHS

Compliant





Page 3 of 3

