


# UBXLCUC11

## Base Product

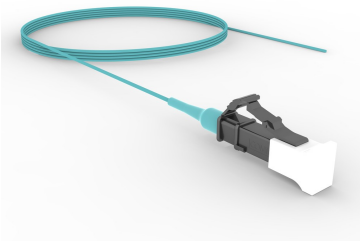

Ultra Low Loss (ULL) LazrSPEED® 550 LC/UPC to Unconnectorized, Fiber Pigtail, 0.9 mm Riser - SBJ

## Product Classification

Regional Availability	Asia   Australia/New Zealand   China   Europe   India   Latin America   Middle East/Africa   North America
Portfolio	CommScope®
Product Type	Fiber pigtail, unjacketed
Product Brand	SYSTIMAX ULL
Product Series	UBX
Ordering Note	Minimum length may vary based on cable configuration

## General Specifications


Color, boot A	Aqua
Color, connector A	Black
Interface, Connector A	LC/UPC
Jacket Color	Aqua
Total Fibers, quantity	1

## Dimensions

Cable Assembly Length Range (m)	1 – 61
Cable Assembly Length Range (ft)	2 – 200

## Ordering Tree

# UBXLCUC11

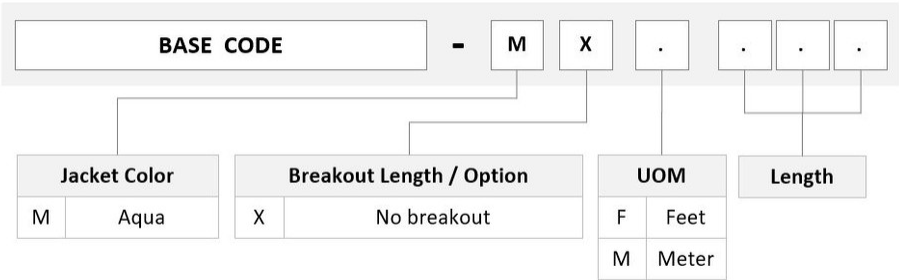

## Mechanical Specifications

**Cable Retention Strength, maximum** 2.00 lb @ 90 ° | 5.00 lb @ 0 °

## Optical Specifications

**Fiber Mode** Multimode  
**Fiber Type** OM4, LazrSPEED®

## Environmental Specifications

**Operating Temperature** -10 °C to +60 °C (+14 °F to +140 °F)  
**Environmental Space** Low Smoke Zero Halogen (LSZH)

## Packaging and Weights

**Packaging quantity** 2

## Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant/Exempted



## Included Products


760010603 – Fiber Indoor Cable, LazrSPEED® 0.9 mm Low Smoke Zero Halogen Reinforced Buffered, 1  
N-001-RF-5K-F09AQ

# UBXLCUC11

---

860657287

- fiber, Multimode OM4, Gel-free, Feet jacket marking, Aqua jacket color  
LC/PC Connector, Multimode, Aqua

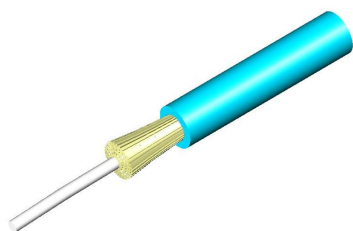

Fiber Indoor Cable, LazrSPEED® 0.9 mm Low Smoke Zero Halogen Reinforced Buffered, 1 fiber, Multimode OM4, Gel-free, Feet jacket marking, Aqua jacket color

### Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America
Portfolio	CommScope®
Product Type	Fiber indoor cable
Product Series	N-RF


### General Specifications

Cable Type	Cordage
Construction Type	Non-armored
Subunit Type	Gel-free
Jacket Color	Aqua
Jacket Marking	Feet
Total Fiber Count	1

### Dimensions

Diameter Over Jacket	0.9 mm   0.035 in
----------------------	-------------------

### Representative Image

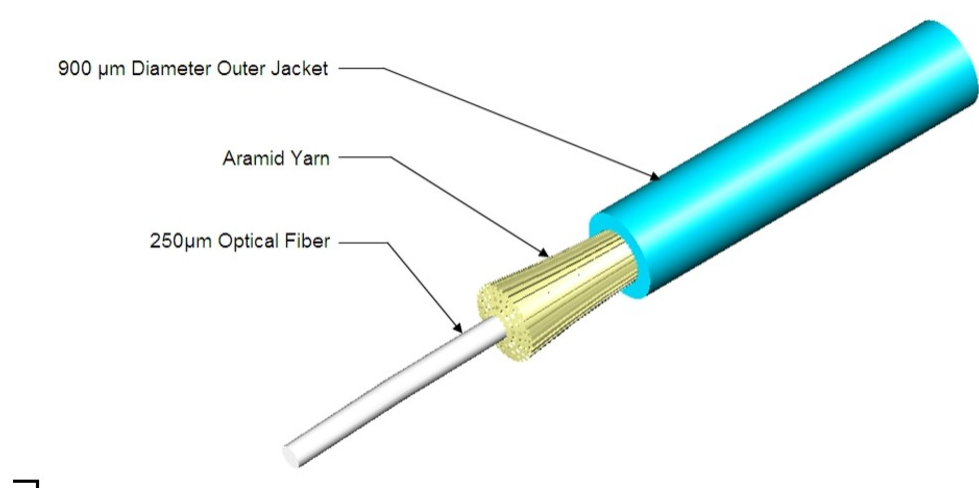

## Mechanical Specifications

Minimum Bend Radius, loaded	38 mm   1.496 in
Minimum Bend Radius, unloaded	15 mm   0.591 in
Tensile Load, long term, maximum	20 N   4.496 lbf
Tensile Load, short term, maximum	67 N   15.062 lbf
Compression	10 N/mm   57.101 lb/in
Compression Test Method	FOTP-41   IEC 60794-1 E3
Flex	300 cycles
Flex Test Method	FOTP-104   IEC 60794-1 E6
Impact	0.74 N-m   6.55 in lb
Impact Test Method	FOTP-25   IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33   IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85   IEC 60794-1 E7
Vertical Rise, maximum	500 m   1,640.42 ft

## Optical Specifications

Fiber Type	OM4, LazrSPEED® 550   OM4, bend insensitive
------------	---

## Environmental Specifications

# 760010603 | N-001-RF-5K-F09AQ

Installation temperature	-10 °C to +50 °C (+14 °F to +122 °F)
Operating Temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Storage Temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Cable Qualification Standards	ANSI/ICEA S-83-596   Telcordia GR-409
Environmental Space	Low Smoke Zero Halogen (LSZH)   Riser
Flame Test Listing	NEC OFNR-ST1 (ETL) and c(ETL)
Flame Test Method	IEC 60332-3   IEC 60754-2   IEC 61034-2   UL 1666   UL 1685

## Environmental Test Specifications

Heat Age	-20 °C to +85 °C (-4 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	-20 °C to +70 °C (-4 °F to +158 °F)
Low High Bend Test Method	FOTP-37   IEC 60794-1 E11
Temperature Cycle	-20 °C to +70 °C (-4 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3   IEC 60794-1 F1

## Packaging and Weights

Cable weight	1 kg/km   0.672 lb/kft
--------------	------------------------

## Regulatory Compliance/Certifications


Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant



## \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable

LC/PC Connector, Multimode, Aqua



Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America
Portfolio	CommScope®
Product Type	Fiber connector

General Specifications

Color, boot	Aqua
Color, housing	Black
Interface	LC/UPC

Dimensions

Length	39.6 mm   1.559 in
Compatible Cable Diameter	0.9 mm   0.035 in

Material Specifications

Ferrule Material	Zirconia
------------------	----------

Mechanical Specifications

Cable Retention Strength, maximum	1.00 lb @ 0 °
-----------------------------------	---------------

Optical Specifications

Fiber Mode	Multimode
Insertion Loss Change, mating	0.2 dB
Optical Components Standard	ANSI/TIA-568. 3-D   IEC 61753-1
Insertion Loss Change, temperature	0.2 dB
Insertion Loss, ULL, maximum	0.15 dB
Insertion Loss, ULL, typical	0.1 dB
Return Loss, minimum	35 dB

\* Footnotes

<b>Insertion Loss Change, mating</b>	TIA-568: Maximum insertion loss change after 500 matings
<b>Insertion Loss Change, temperature</b>	Maximum insertion loss change from -10 °C to +60 °C (+14 °F to +140 °F)