# <u>S-500</u>



### Stand-Off Bracket, 60 in, includes pipe

Product Type

Stand-off mount

## General Specifications

Mounting	Straight or tapered legs up to 88.9 mm (3-1/2 in) OD, clamps included
Note	One 20 ft omni antenna
Pipe, quantity	1
Tower Taper	Non-tapered   Tapered
Dimensions	
Height	812.8 mm   32 in
Width	127 mm   5 in
Length	1524 mm   60 in
Pipe Length	812.8 mm   32 in
Pipe Outer Diameter	48.26 mm   1.9 in
Stand-off Distance	1524 mm   60 in


Page 1 of 3



©2025 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners. Revised: March 12, 2025

# <u>S-500</u>

# Outline Drawing

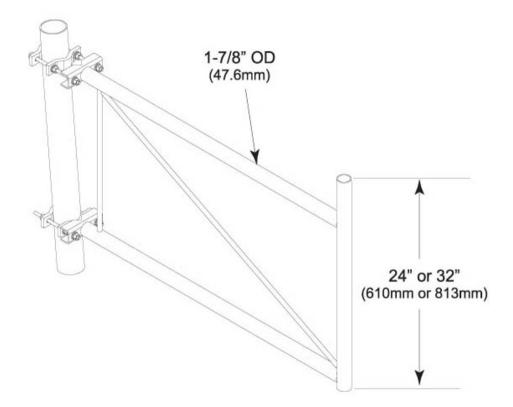

#### Material Specifications

Material Type

Hot dip galvanized steel

#### Mechanical Specifications

Wind Rating120 mph (BWS) at 150 ft AGL

Wind Rating Test Method TIA/EIA-222

#### Packaging and Weights

Included	Clamps   Stand-off
Packaging quantity	1
Weight, net	21.5 kg   47.399 lb

### Regulatory Compliance/Certifications

#### Agency

Classification

Page 2 of 3



©2025 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners. Revised: March 12, 2025

# S-500

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

### \* Footnotes

Wind Rating

BWS-Base Wind Speed; FBC-Florida Building Code



©2025 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners. Revised: March 12, 2025