

RRZZVVT4S4-65DR8V2



28-port sector antenna, 4x 694–960, 4x 1427–2690 and 4x 1695– 2690 MHz 65° HPBW, 8x 2300–2690 and 8x 3300–3800MHz, 90° HPBW, 8x RET

- Also includes 1x 4-Column Array for 2300-2690 MHz and a separate 1x 4-Column Array for 3300-3800MHz. Column spacing optimized to support Soft Split Beamforming
- Includes MQ4/MQ5 type cluster connector(s)
- Includes eight Internal RET's
- Supports re-configurable antenna sharing capability enabling control of the internal RET system using up to two separate RET compatible OEM radios
- New end cap shape for additional wind load reduction

This product will be discontinued on: December 31, 2025

Replaced By:

RRZZVVT4S4-65DR8EC 28-port sector antenna, 4x 694–960, 4x 1427–2690 and 4x 1695–2690 MHz 65° HPBW, 8x 2300–2690 and 8x 3300–3800MHz, 90° HPBW, 8x RET

General Specifications

Antenna Type	Sector and beamforming
Band	Multiband
Calibration Connector Interface	MQ5
Calibration Connector Quantity	2
Color	Light Gray (RAL 7035)
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
Radome Material	Fiberglass, UV resistant
Reflector Material	Aluminum
RF Connector Interface	4.3-10 Female MQ4 MQ5
RF Connector Location	Bottom
RF Connector Quantity, high band	16
RF Connector Quantity, mid band	8
RF Connector Quantity, low band	4
RF Connector Quantity, total	28

RRZZVVT4S4-65DR8V2

Remote Electrical Tilt (RET) Information

RET Hardware	CommRET v2
RET Interface	8-pin DIN Female 8-pin DIN Male
RET Interface, quantity	2 female 2 male
Input Voltage	10–30 Vdc
Internal RET	High band (2) Low band (2) Mid band (4)
Power Consumption, active state, maximum	8 W
Power Consumption, idle state, maximum	1 W
Protocol	3GPP/AISG 2.0 (Single RET)


Dimensions

Width	498 mm 19.606 in
Depth	197 mm 7.756 in
Length	2688 mm 105.827 in
Net Weight, without mounting kit	59.4 kg 130.954 lb

Array Layout

Array ID	Frequency (MHz)	RF Connector	RET (SRET)	AISG No.	AISG RET UID
R1	694-960	1 - 2	1	AISG1	CPxxxxxxxxxxxxR1
R2	694-960	3 - 4	2	AISG1	CPxxxxxxxxxxxxR2
Y1	1427-2690	5 - 6	3	AISG1	CPxxxxxxxxxxxxY1
Y2	1695-2690	7 - 8	4	AISG1	CPxxxxxxxxxxxxY2
Y3	2300-2690	9 - 16	5	AISG1	CPxxxxxxxxxxxxY3
Y4	1427-2690	17 - 18	6	AISG1	CPxxxxxxxxxxxxY4
Y5	1695-2690	19 - 20	7	AISG1	CPxxxxxxxxxxxxY5
P1	3300-3800	21 - 28	8	AISG1	CPxxxxxxxxxxxxP1

(Sizes of colored boxes are not true depictions of array sizes)

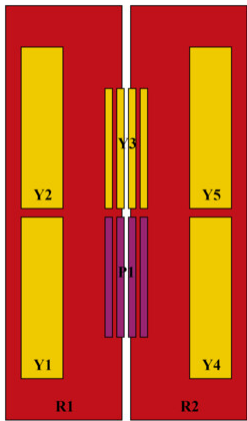

Port Configuration

RRZZVVT4S4-65DR8V2

Antenna port to Cal port, degrees								
Isolation, Cross Polarization, dB	28	28	28	25	25	25	25	25
Isolation, Inter-band, dB	28	28	28	25	25	25	28	28
Isolation, Co-polarization, dB							20	20
VSWR Return loss, dB	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-150	-150	-150	-150	-150	-150	-130	-130
Input Power per Port at 50°C, maximum, watts	300	300	300	250	250	200	150	75

Electrical Specifications, Broadcast 65°

Frequency Band, MHz	2300–2690 3300–3800	
Gain, dBi	18.2	17.9
Beamwidth, Horizontal, degrees	65	65
Beamwidth, Vertical, degrees	4.9	6.5
Front-to-Back Total Power at 180° ± 30°, dB	27	25
USLS (First Lobe), dB	18	17

Electrical Specifications, Service Beam

Frequency Band, MHz	2300–2690 3300–3800	
Steered 0° Gain, dBi	21.2	20.3
Steered 0° Beamwidth, Horizontal, degrees	25	24
Steered 0° Front-to-Back Total Power at 180° ± 30°, dB	32	28
Steered 0° Horizontal Sidelobe, dB	13	12
Steered 30° Gain, dBi	20.4	19.7
Steered 30° Beamwidth, Horizontal, degrees	29	27
Steered 30° Front-to-Back Total Power at 180° ± 30°, dB	31	27

Electrical Specifications, Soft Split

Frequency Band, MHz	2300–2690 3300–3800	
Gain, dBi	20.2	19.5

RRZZVVT4S4-65DR8V2

Beamwidth, Horizontal, degrees	32	30
Front-to-Back Total Power at 180° ± 30°, dB	33	29
Horizontal Sidelobe, dB	21	16

Mechanical Specifications

Wind Loading @ Velocity, frontal	970.0 N @ 150 km/h (218.1 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	304.0 N @ 150 km/h (68.3 lbf @ 150 km/h)
Wind Loading @ Velocity, maximum	1,162.0 N @ 150 km/h (261.2 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	667.0 N @ 150 km/h (149.9 lbf @ 150 km/h)
Wind Speed, maximum	241 km/h (150 mph)

Packaging and Weights

Width, packed	597 mm 23.504 in
Depth, packed	349 mm 13.74 in
Length, packed	2829 mm 111.378 in
Weight, gross	80 kg 176.37 lb

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



Included Products

BSAMNT-4	–	Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.
BSAMNT-M4	–	Middle Downtilt Mounting Kit for Long Antennas for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor bracket set.

* Footnotes

Performance Note	Severe environmental conditions may degrade optimum performance
------------------	-----------------------------------------------------------------

BSAMNT-4



Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.

Product Classification

Product Type Downtilt mounting kit

General Specifications

Application Outdoor

Color Silver

Dimensions

Compatible Diameter, maximum 115 mm | 4.528 in

Compatible Diameter, minimum 60 mm | 2.362 in

Weight, net 6.5 kg | 14.33 lb

Material Specifications

Material Type Galvanized steel

Packaging and Weights

Included Brackets | Hardware

Packaging quantity 1

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.andrew.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant



BSAMNT-M4



Middle Downtilt Mounting Kit for Long Antennas for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor bracket set.

Product Classification

Product Type Downtilt mounting kit

General Specifications

Application Outdoor

Color Silver

Dimensions

Compatible Diameter, maximum 115 mm | 4.528 in

Compatible Diameter, minimum 60 mm | 2.362 in

Weight, net 4.6 kg | 10.141 lb

Material Specifications

Material Type Galvanized steel

Packaging and Weights

Included Brackets | Hardware

Packaging quantity 1

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.andrew.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant

