

RRVV2VV-6533D-R8



16-port sector/multibeam antenna 4x 694–960 MHz , 4x 1695-2690 MHz 65° HPBW and 8x 1710–2690 MHz 2x 2-Beam 33°HPBW, 8x RET. Band cascaded SRET

General Specifications

Antenna Type	Multibeam
Band	Multiband
Color	Light Gray (RAL 7035)
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage Wind loading figures are validated by wind tunnel measurements described in EN1991-1-4 standard
Radome Material	Fiberglass, UV resistant
Reflector Material	Aluminum
RF Connector Interface	4.3-10 Female
RF Connector Location	Bottom
RF Connector Quantity, high band	12
RF Connector Quantity, mid band	0
RF Connector Quantity, low band	4
RF Connector Quantity, total	16

Remote Electrical Tilt (RET) Information


RET Hardware	CommRET v2
RET Interface	8-pin DIN Female 8-pin DIN Male
RET Interface, quantity	2 female 2 male
Input Voltage	10–30 Vdc
Internal RET	High band (6) Low band (2)
Power Consumption, active state, maximum	8 W
Power Consumption, idle state, maximum	1 W
Protocol	3GPP/AISG 2.0 (Single RET)

Dimensions

RRVV2VV-6533D-R8

Width	498 mm 19.606 in
Depth	197 mm 7.756 in
Length	2577 mm 101.457 in
Net Weight, antenna only	53 kg 116.845 lb

Array Layout

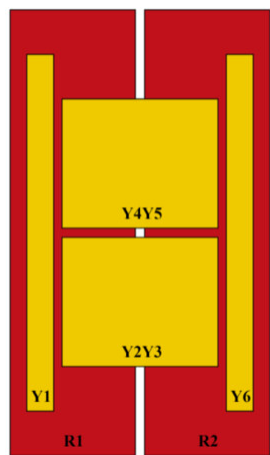

Array ID	Frequency (MHz)	RF Connector	HPBW	RET (SRET)	AISG No.	AISG RET UID
R1	694-960	1 - 2	65°	1	AISG1	CPxxxxxxxxxxxxR1
R2	694-960	3 - 4	65°	2	AISG1	CPxxxxxxxxxxxxR2
Y1	1695-2690	5 - 6	65°	3	AISG1	CPxxxxxxxxxxxxY1
Y2	1710-2690	7 - 8	33°	4	AISG1	CPxxxxxxxxxxxxY2
Y3	1710-2690	9 - 10	33°	5	AISG1	CPxxxxxxxxxxxxY3
Y4	1710-2690	11 - 12	33°	6	AISG1	CPxxxxxxxxxxxxY4
Y5	1710-2690	13 - 14	33°	7	AISG1	CPxxxxxxxxxxxxY5
Y6	1695-2690	15 - 16	65°	8	AISG1	CPxxxxxxxxxxxxY6

(Sizes of colored boxes are not true depictions of array sizes)

Port Configuration



RRVV2VV-6533D-R8

Electrical Specifications

Impedance	50 ohm
Operating Frequency Band	1695 – 2690 MHz 1710 – 2690 MHz 694 – 960 MHz
Polarization	±45°
Total Input Power, maximum	1,700 W @ 50 °C

Electrical Specifications

Frequency Band, MHz	694–806	790–896	890–960	1695–1990	1920–2300	2300–2500	2490–2690	1710–1990	1920–2300	2300–2500	2490–2690
Gain at Mid Tilt, dBi	15.3	15.7	15.9	16.7	17.8	18.5	18.6	17.5	18.9	18.9	19.3
Beam Centers, Horizontal, degrees								±27	±27	±27	±27
Beamwidth, Horizontal, degrees	71	64	63	73	64	58	56	36	33	30	27
Beamwidth, Vertical, degrees	9.2	8.2	7.6	5.8	5.3	4.8	4.6	7.2	6.5	5.7	5.3
Beam Tilt, degrees	2–12	2–12	2–12	2–12	2–12	2–12	2–12	2–12	2–12	2–12	2–12
USLS (First Lobe), dB	19	17	18	25	24	21	18	17	19	20	20
Front-to-Back Ratio at 180°, dB	29	28	29	34	33	35	33	38	38	34	32
Front-to-Back Total Power at 180° ± 30°, dB	22	22	22	24	25	28	26	32	31	28	27
CPR at Boresight, dB	24	22	17	21	21	23	22	17	21	17	21
CPR at Sector, dB	10	10	13	8	7	9	7				
Isolation, Cross Polarization,	25	25	25	25	25	25	25	25	25	25	25

RRVV2VV-6533D-R8

dB											
Isolation, Inter-band, dB	25	25	25	25	25	25	25	25	25	25	25
Isolation, Beam to Beam, dB								17	17	17	17
VSWR Return loss, dB	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-150	-150	-150	-150	-150	-150	-150	-150	-150	-150	-150
Input Power per Port at 50°C, maximum, watts	250	250	250	200	200	200	200	200	200	200	200

Mechanical Specifications

Wind Loading @ Velocity, frontal	876.0 N @ 150 km/h (196.9 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	229.0 N @ 150 km/h (51.5 lbf @ 150 km/h)
Wind Loading @ Velocity, maximum	1,165.0 N @ 150 km/h (261.9 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	603.0 N @ 150 km/h (135.6 lbf @ 150 km/h)
Wind Speed, maximum	241 km/h (150 mph)

Packaging and Weights

Width, packed	565 mm 22.244 in
Depth, packed	309 mm 12.165 in
Length, packed	2824 mm 111.181 in
Weight, gross	74 kg 163.142 lb

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.andrew.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant

RRVV2VV-6533D-R8



Included Products

BSAMNT-4	–	Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.
BSAMNT-M4	–	Middle Downtilt Mounting Kit for Long Antennas for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor bracket set.

* Footnotes

Performance Note	Severe environmental conditions may degrade optimum performance
-------------------------	---

BSAMNT-4



Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.

Product Classification

Product Type Downtilt mounting kit

General Specifications

Application Outdoor

Color Silver

Dimensions

Compatible Diameter, maximum 115 mm | 4.528 in

Compatible Diameter, minimum 60 mm | 2.362 in

Weight, net 6.5 kg | 14.33 lb

Material Specifications

Material Type Galvanized steel

Packaging and Weights

Included Brackets | Hardware

Packaging quantity 1

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.andrew.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant



BSAMNT-M4



Middle Downtilt Mounting Kit for Long Antennas for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor bracket set.

Product Classification

Product Type Downtilt mounting kit

General Specifications

Application Outdoor

Color Silver

Dimensions

Compatible Diameter, maximum 115 mm | 4.528 in

Compatible Diameter, minimum 60 mm | 2.362 in

Weight, net 4.6 kg | 10.141 lb

Material Specifications

Material Type Galvanized steel

Packaging and Weights

Included Brackets | Hardware

Packaging quantity 1

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.andrew.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant

