## FPCC-KMYP



Fiber Optic Patch Cord, duplex, singlemode, 1.2 mm OFNP jacket, LC/UPC-LC/APC, yellow

- 1.2 mm diameter cable provides a 65% space savings over commonly used 2.0 mm cable
- 1.2 mm diameter fiber patch cords use Reduced Bend Radius (RBR) fiber cable
- Typically used in environments where space constraints and cable routing prove most challenging
- \*Product complies with the Build America, Buy America Act (BABAA) requirements of the Infrastructure Investment and Jobs Act of 2021 (Pub. L. 117- 58, §§ 70901-70953), or is the subject of a waiver approved by the Secretary of Commerce or designee. Compliance requirements and waiver applicability vary based on government funding program. Check the laws and regulations for your specific program.

#### **Product Classification**

Regional Availability Europe | Latin America | Middle East/Africa | North America

**Product Type** Fiber patch cord, duplex

Product Series FPCC

**Government Requirements**Build America Buy America (BABA) compliant\*

### General Specifications

Connector A, quantity

Color, boot ABlueColor, connector ABlueConnector B, quantity1

Color, boot B Green
Color, connector B Green
Interface, Connector A LC/UPC
Interface, Connector B LC/APC
Jacket Color Yellow

**Location of Manufacturing**Claremont, North Carolina

Total Fibers, quantity 2

**Transmission Standards** TIA/EIA-604 FOCIS-3


**Dimensions** 

**Diameter Over Jacket** 1.2 mm | 0.047 in

COMMSC PE°

# FPCC-KMYP

## Ordering Tree

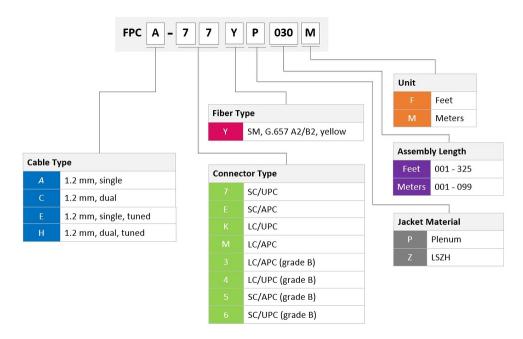

## **Optical Specifications**

Fiber Mode	Singlemode
Fiber Type	G.657.A2/B2
Insertion Loss, maximum, connector A	0.35 dB
Insertion Loss, maximum, connector B	0.35 dB
Return Loss, minimum, connector A	65 dB
Return Loss, minimum, connector B	65 dB

### **Environmental Specifications**

**Environmental Space** Plenum

**Qualification Standards** GR-326 CORE | GR-449-CORE

Packaging and Weights

Packaging quantity 1

