

D-CN



Fiber Optic Cable, Outdoor Arid Core Gel-Free Tubes, Central Tube All-Dielectric

- CommScope's outside plant fiber cables are made with high-performance, standards-compliant materials
- The portfolio includes both armored and dielectric designs available with dry or gel-filled tubes
- Superior mechanical and optical performance with unmatched stability and quality

Product Classification


Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	CommScope®
Product Type	Fiber OSP cable
Product Series	D-CN

General Specifications

Cable Type	Ribbon central tube
Construction Type	Non-armored
Jacket Color	Black
Jacket Marking	Custom printing Feet
Subunit Type	Gel-free

Ordering Tree

D-CN

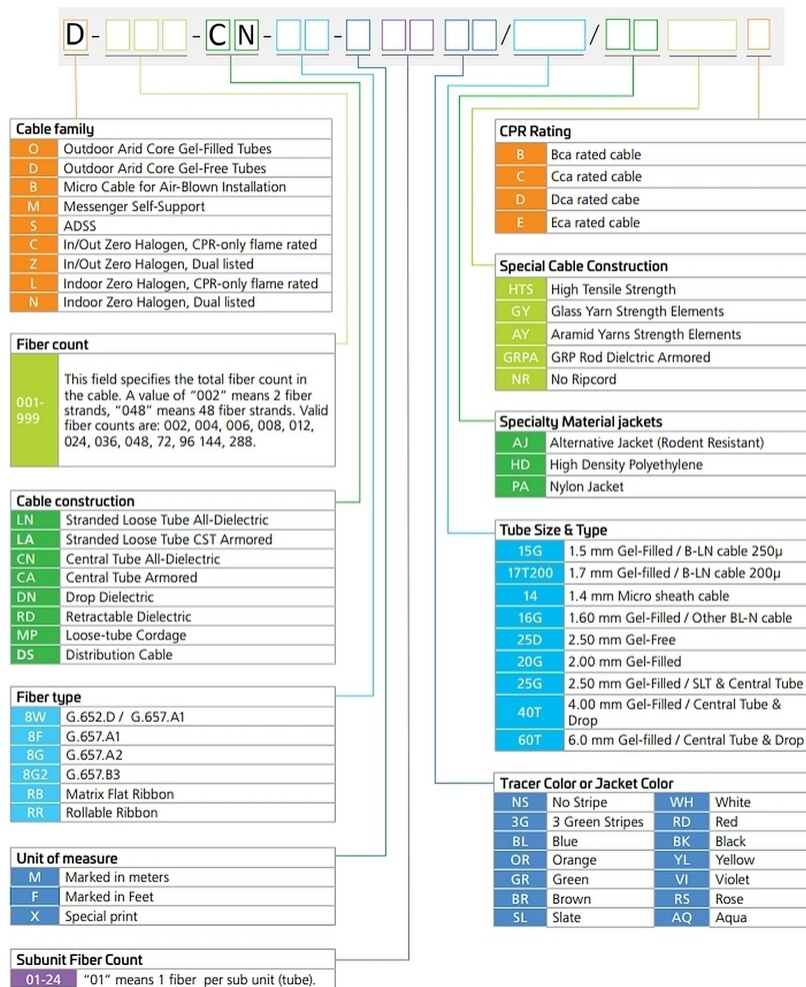

Mechanical Specifications

Tensile Load, long term, maximum	800 N 179.847 lbf
Tensile Load, short term, maximum	2700 N 606.984 lbf
Compression	22 N/mm 125.623 lb/in
Compression Test Method	FOTP-41 IEC 60794-1 E3
Flex	25 cycles
Flex Test Method	FOTP-104 IEC 60794-1 E6
Impact Test Method	FOTP-25 IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33 IEC 60794-1 E1
Twist	10 cycles

D-CN

Twist Test Method FOTP-85 | IEC 60794-1 E7

Environmental Specifications

Installation temperature -30 °C to +60 °C (-22 °F to +140 °F)
Operating Temperature -40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature -40 °C to +75 °C (-40 °F to +167 °F)
Cable Qualification Standards ANSI/ICEA S-87-640 | Telcordia GR-20
Environmental Space Aerial, lashed | Buried
Jacket UV Resistance UV stabilized
Water Penetration 24 h
Water Penetration Test Method FOTP-82 | IEC 60794-1 F5

Environmental Test Specifications

Heat Age -40 °C to +85 °C (-40 °F to +185 °F)
Heat Age Test Method IEC 60794-1 F9
Low High Bend -30 °C to +60 °C (-22 °F to +140 °F)
Low High Bend Test Method FOTP-37 | IEC 60794-1 E11
Temperature Cycle -40 °C to +70 °C (-40 °F to +158 °F)
Temperature Cycle Test Method FOTP-3 | IEC 60794-1 F1

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable