


# M-LA

---



## Fiber Optic Cable, Outdoor Messenger Self-Support, Stranded Loose Tube CST Armored

- CommScope's outside plant fiber cables are made with high-performance, standards-compliant materials
- The portfolio includes both armored and dielectric designs available with dry or gel-filled tubes
- Superior mechanical and optical performance with unmatched stability and quality


## Product Classification

<b>Regional Availability</b>	Asia   Australia/New Zealand   EMEA   Latin America   North America
<b>Portfolio</b>	CommScope®
<b>Product Type</b>	Fiber OSP cable
<b>Product Series</b>	M-LA

## General Specifications

<b>Armor Type</b>	Corrugated steel
<b>Cable Type</b>	Stranded loose tube
<b>Construction Type</b>	Armored
<b>Jacket Color</b>	Black
<b>Jacket Marking</b>	Feet   Meters

## Ordering Tree

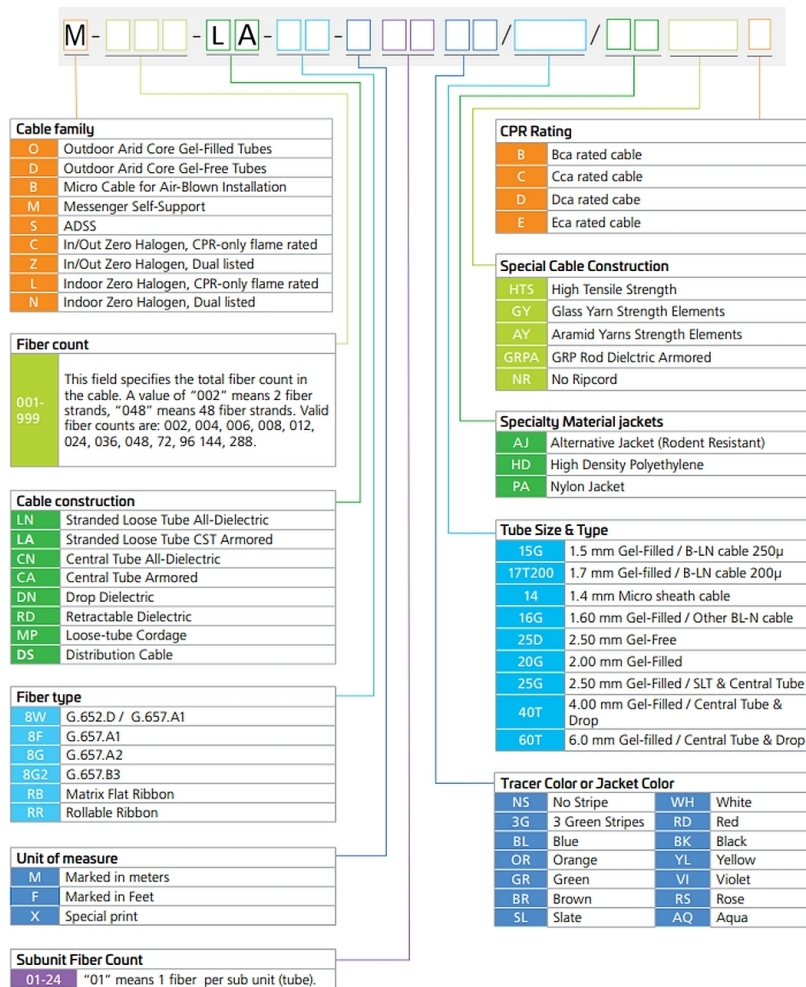

## Material Specifications

**Jacket Material** PE

## Mechanical Specifications

**Compression** 44 N/mm | 251.246 lb/in

**Compression Test Method** FOTP-41 | IEC 60794-1 E3

**Flex** 35 cycles

**Flex Test Method** FOTP-104 | IEC 60794-1 E6

**Impact Test Method** FOTP-25 | IEC 60794-1 E4

**Strain** See long and short term tensile loads

**Strain Test Method** FOTP-33 | IEC 60794-1 E1

**Twist** 10 cycles

**Twist Test Method** FOTP-85 | IEC 60794-1 E7

## Environmental Specifications

<b>Installation temperature</b>	-30 °C to +70 °C (-22 °F to +158 °F)
<b>Operating Temperature</b>	-40 °C to +70 °C (-40 °F to +158 °F)
<b>Storage Temperature</b>	-40 °C to +75 °C (-40 °F to +167 °F)
<b>Cable Qualification Standards</b>	ANSI/ICEA S-87-640   EN 187105   Telcordia GR-20
<b>Environmental Space</b>	Aerial, self-support
<b>Jacket UV Resistance</b>	UV stabilized
<b>Water Penetration</b>	24 h
<b>Water Penetration Test Method</b>	FOTP-82   IEC 60794-1 F5

## Environmental Test Specifications

<b>Cable Freeze</b>	-2 °C   28.4 °F
<b>Cable Freeze Test Method</b>	FOTP-98   IEC 60794-1 F15
<b>Drip</b>	70 °C   158 °F
<b>Drip Test Method</b>	FOTP-81   IEC 60794-1 E14
<b>Heat Age</b>	-40 °C to +85 °C (-40 °F to +185 °F)
<b>Heat Age Test Method</b>	IEC 60794-1 F9
<b>Low High Bend</b>	-30 °C to +60 °C (-22 °F to +140 °F)
<b>Low High Bend Test Method</b>	FOTP-37   IEC 60794-1 E11
<b>Temperature Cycle</b>	-40 °C to +70 °C (-40 °F to +158 °F)
<b>Temperature Cycle Test Method</b>	FOTP-3   IEC 60794-1 F1

## \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable