U3GQXQXTK

Base Product



Ultra Low Loss (ULL) Singlemode MPO8 (Pinned) to MPO8 (Pinned), Fiber Trunk Cable Assembly, 72-Fiber, LZSH B2ca

Product Classification

Regional Availability Europe

Portfolio CommScope®

 Product Type
 Fiber trunk cable assembly

 Product Brand
 Propel | SYSTIMAX ULL

Ordering Note For additional jacket colors, please contact a CommScope Sales

MPO-08/APC Male

MPO-08/APC Male

Representative | For lengths greater than 999 ft (304 m), orders must be in meters | Minimum length may vary based on cable configuration

General Specifications

Connector A, quantity 9

Color, boot A Gray

Color, connector A Green

Connector B, quantity 9

Color, boot B Gray

Color, connector B Green

Construction Type Stranded

Furcation Color Yellow

•

Jacket Color Yellow

Polarity Method B Enhanced (ULL)

Fibers per Subunit, quantity 8

Total Fibers, quantity 72

Dimensions

Interface, Connector A

Interface, Connector B

Breakout Length 22 in



U3GQXQXTK


Cable Assembly Length Range (m)

3 - 305

Cable Assembly Length Range (ft)

10 - 999

Ordering Tree

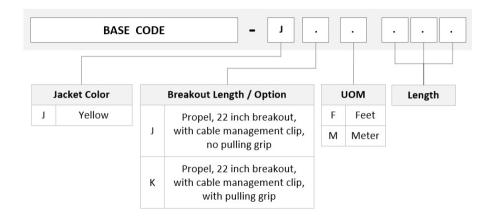

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 ° | 4.40 lb @ 90 °

Optical Specifications

Fiber Mode Singlemode

Fiber Type G.657.A2, TeraSPEED®

Environmental Specifications

Operating Temperature $-10 \,^{\circ}\text{C}$ to $+60 \,^{\circ}\text{C}$ (+14 $^{\circ}\text{F}$ to +140 $^{\circ}\text{F}$)

EN50575 CPR Cable EuroClass Fire Performance B2ca

Environmental Space Indoor | Low Smoke Zero Halogen (LSZH)

Regulatory Compliance/Certifications

Agency Classification ANATEL Compliant

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system





U3GQXQXTK

Included Products

860659022

MPO-08, ULTRA LOW LOSS, MALE, Singlemode, GREEN,
 2mm