

SXT-B2MC00000MN000



SXT, NOVUX™ Specialty Indexing Terminal, Branch, 2f, Stubless with HMFOC Jack (male/pinned) Input

- NOVUX™ Hardened Multi-fiber Terminals incorporate hardened connector technology that is designed to withstand the rugged outside plant environment
- Hardened connectors are factory-integrated and environmentally sealed for use in optical drop cable deployments
- Plug and play adapter ports ensure rapid cable installment in the outside plant access section of the network
- NOVUX™ SXT terminals are available in 1 to 2 ports for Index and Branch applications
- Available with flat dielectric and flat toneable/locatable dielectric cable
- NOVUX™ smaller terminal size allowing for installation in constrained spaces
- NOVUX™ terminals are available in Black (RAL# 9005) or Gray (RAL# 7035)
- CommScope Product ID plate with QR code link to product documents and C-Track

Product Classification

| | |
|-------------------------------|---|
| Regional Availability | Asia EMEA Latin America North America |
| Product Type | Access terminal, without splitter/tap |
| Product Brand | NOVUX™ |
| Product Series | SXT |
| Minimum Order Quantity | 1 |

General Specifications


| | |
|-------------------------------|--|
| Cable Type | No cable (stubless) |
| Distribution Type | 2-port branch |
| Drop Port Type | Hardened multi-fiber (HMFOC) jack, male/pinned |
| Drop Port, quantity | 1 |
| Enclosure Color | Black (RAL 9005) |
| Forward Port Type | Hardened multi-fiber (HMFOC) jack, male/pinned |
| Forward Port, quantity | 1 |
| Mounting | Handhole Pedestal Pole Strand |
| Port Type | Hardened multi-fiber (HMFOC) jack, male/pinned |
| Port, quantity | 2 |
| Stub Type | No tail |

Dimensions

SXT-B2MC00000MN000

| | |
|---------------------------|-------------------|
| Height | 244 mm 9.606 in |
| Width | 99 mm 3.898 in |
| Length | 64 mm 2.5 in |
| Cable Length, stub | 0 ft (0 m) |

Dimension Drawing

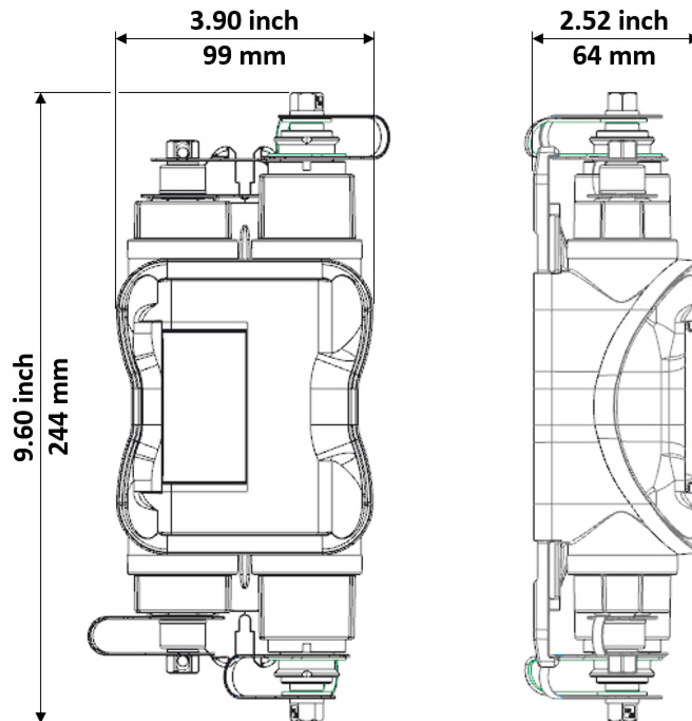

Material Specifications

| | |
|--------------------------------|------------------|
| Enclosure Material Type | Hardened plastic |
|--------------------------------|------------------|

Optical Specifications

| | |
|--|----------------|
| Operating Wavelength Range | 1260 – 1635 nm |
| Attenuation Single Ports, maximum | 0.65 dB |
| Return Loss, Connector, typical | 65 dB |

Environmental Specifications

| | |
|------------------------------|--------------------------------------|
| Operating Temperature | -40 °C to +65 °C (-40 °F to +149 °F) |
|------------------------------|--------------------------------------|

SXT-B2MC00000MN000

| | |
|--------------------------------|---|
| Relative Humidity | 5%–100%, condensing |
| Environmental Space | Above ground Below ground |
| Qualification Standards | IEC 60529, IP68 + 2 m waterhead IEC 61753-1, category G |
| UV Resistance | UV stabilized |

Packaging and Weights

| | |
|---------------------------|-----|
| Packaging quantity | 1 |
| Packaging Type | Box |

Regulatory Compliance/Certifications

| Agency | Classification |
|---------------|--|
| CHINA-ROHS | Below maximum concentration value |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |
| REACH-SVHC | Compliant as per SVHC revision on www.commscope.com/ProductCompliance |
| ROHS | Compliant |
| UK-ROHS | Compliant |

