


U4VLCLCCF

Base Product

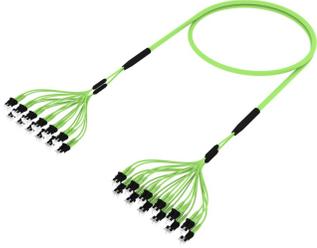

Ultra Low Loss ULL LazrSPEED® 550 OM5 LC/UPC to LC/UPC Ruggedized fanout Cable, 24-Fiber, LSZH, 12 fiber PmP 2.0 mm /B2ca

Product Classification

Regional Availability	Asia Australia/New Zealand Europe Latin America Middle East/Africa North America
Portfolio	CommScope®
Product Type	Ruggedized fanout
Product Brand	SYSTIMAX ULL
Ordering Note	For additional jacket colors, please contact a CommScope Sales Representative For lengths greater than 999 ft (304 m), orders must be in meters Minimum length may vary based on cable configuration

General Specifications


Color, boot A	Blue
Color, connector A	Black
Color, boot B	Blue
Color, connector B	Black
Construction Type	Stranded
Furcation Color	Lime green
Interface, Connector A	LC/UPC
Interface, Connector B	LC/UPC
Interface Feature, connector B	ULL
Jacket Color	Lime green
Fibers per Subunit, quantity	12
Total Fibers, quantity	24

Dimensions

Cable Assembly Length Range (m)	3 – 305
Cable Assembly Length Range (ft)	10 – 999

U4VLCLCCF

Ordering Tree

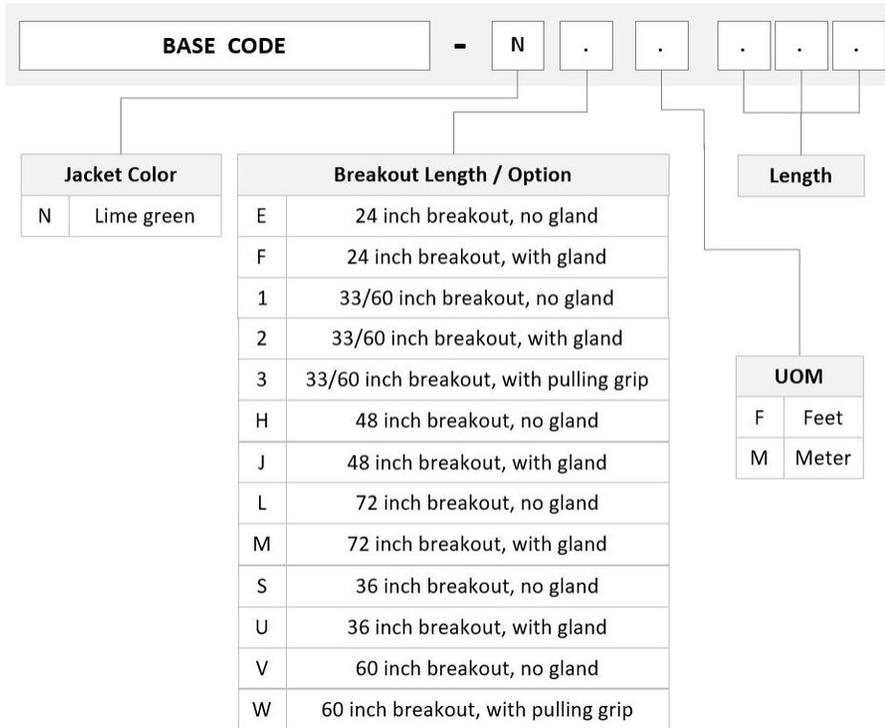

Optical Specifications

Fiber Mode	Multimode
Fiber Type	OM5, LazrSPEED®

Environmental Specifications

Operating Temperature	-10 °C to +60 °C (+14 °F to +140 °F)
EN50575 CPR Cable EuroClass Fire Performance	B2ca
Environmental Space	Indoor Low Smoke Zero Halogen (LSZH)

Regulatory Compliance/Certifications

Agency	Classification
ANATEL	Compliant
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system


U4VLCLCCF

REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant
UK-ROHS	Compliant



Included Products

- 760249523
N-024-MP-5G-F12LM/20T/B2 – Fiber indoor cable, LazrSPEED® Low Smoke Zero Halogen Riser MPO Trunk, 24 fiber with 12 fiber 2.0mm subunits, Gel-free, Multimode OM5, Feet jacket marking, Lime green jacket color, B2ca flame rating
- 860649627 – LC/UPC Connector, Multimode, Beige, Short Boot

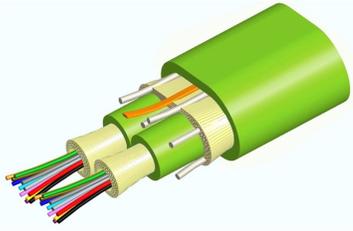

Fiber indoor cable, LazrSPEED® Low Smoke Zero Halogen Riser MPO Trunk, 24 fiber with 12 fiber 2.0mm subunits, Gel-free, Multimode OM5, Feet jacket marking, Lime green jacket color, B2ca flame rating

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA
Portfolio	CommScope®
Product Type	Fiber indoor cable
Product Series	N-MP


General Specifications

Cable Type	MPO trunk cable
Construction Type	Non-armored
Subunit Type	Gel-free
Jacket Color	Lime green
Jacket Marking	Feet
Subunit, quantity	2
Fibers per Subunit, quantity	12
Total Fiber Count	24

Dimensions

Height Over Jacket	5.4 mm 0.213 in
Width Over Jacket	7.4 mm 0.291 in
Buffer Tube/Subunit Diameter	2 mm 0.079 in

Representative Image

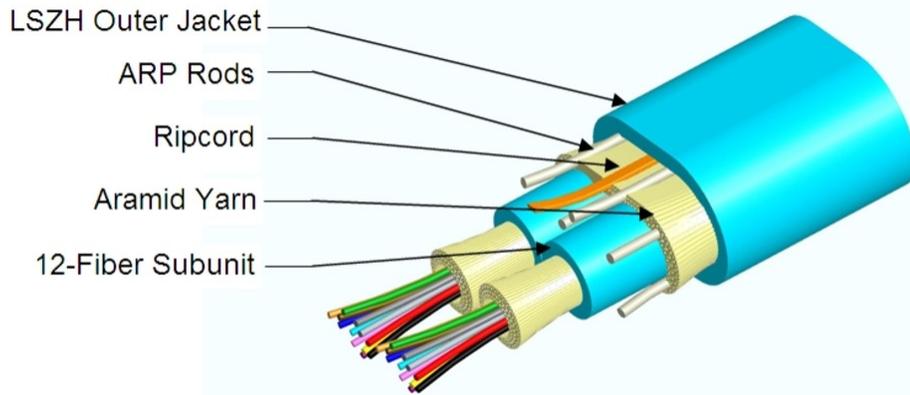

Mechanical Specifications

Minimum Bend Radius, loaded	81 mm 3.189 in
Minimum Bend Radius, unloaded	54 mm 2.126 in
Tensile Load, long term, maximum	200 N 44.962 lbf
Tensile Load, short term, maximum	667 N 149.948 lbf
Compression	10 N/mm 57.101 lb/in
Compression Test Method	FOTP-41 IEC 60794-1 E3
Flex	25 cycles
Flex Test Method	FOTP-104 IEC 60794-1 E6
Impact	2.94 N-m 26.021 in lb
Impact Test Method	FOTP-25 IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33 IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85 IEC 60794-1 E7
Vertical Rise, maximum	437 m 1,433.727 ft

Optical Specifications

Fiber Type	OM5, LazrSPEED® wideband
-------------------	--------------------------

Environmental Specifications

Installation temperature	0 °C to +60 °C (+32 °F to +140 °F)
---------------------------------	------------------------------------

760249523 | N-024-MP-5G-F12LM/20T/B2

Operating Temperature	0 °C to +70 °C (+32 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Cable Qualification Standards	ANSI/ICEA S-83-596 Telcordia GR-409
EN50575 CPR Cable EuroClass Fire Performance	B2ca
EN50575 CPR Cable EuroClass Smoke Rating	s1a
EN50575 CPR Cable EuroClass Droplets Rating	d0
EN50575 CPR Cable EuroClass Acidity Rating	a1
Environmental Space	Low Smoke Zero Halogen (LSZH)
Flame Test Method	IEC 60332-3 IEC 60754-2 IEC 61034-2

Environmental Test Specifications

Low High Bend	0 °C to +60 °C (+32 °F to +140 °F)
Low High Bend Test Method	FOTP-37 IEC 60794-1 E11
Temperature Cycle	0 °C to +70 °C (+32 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3 IEC 60794-1 F1

Packaging and Weights

Cable weight	46.7 kg/km 31.381 lb/kft
---------------------	----------------------------

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable

LC/UPC Connector, Multimode, Beige, Short Boot

Product Classification

Regional Availability	Asia Australia/New Zealand EMEA Latin America North America
Portfolio	CommScope®
Product Type	Fiber connector

General Specifications

Color, boot	Beige
Color, housing	Beige
Interface	LC/UPC

Dimensions

Length	41.6 mm 1.638 in
---------------	--------------------

Material Specifications

Ferrule Material	Zirconia
-------------------------	----------

Mechanical Specifications

Cable Retention Strength, maximum	11.24 lb @ 0 °
--	----------------

Optical Specifications

Fiber Mode	Multimode
Insertion Loss Change, mating	0.2 dB
Optical Components Standard	ANSI/TIA-568. 3-D IEC 61753-1
Insertion Loss Change, temperature	0.3 dB
Insertion Loss, maximum	0.15 dB
Return Loss, minimum	35 dB

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance

860649627

ROHS Compliant/Exempted

UK-ROHS Compliant



* Footnotes

Insertion Loss Change, mating TIA-568: Maximum insertion loss change after 500 matings

Insertion Loss Change, temperature Maximum insertion loss change from -10 °C to +60 °C (+14 °F to +140 °F)