

# U4GQXLUT8

Base Product



Singlemode MPO8 APC pinned to LC/UPC Uniboot Ruggedized fanout Cable, 8-Fiber, LSZH, 8 fiber PmP 2.0 mm /B2ca

## Product Classification

Regional Availability	Europe
Portfolio	CommScope®
Product Type	Ruggedized fanout
Product Brand	Propel   SYSTIMAX ULL
Ordering Note	For additional jacket colors, please contact a CommScope Sales Representative   For lengths greater than 999 ft (304 m), orders must be in meters   Minimum length may vary based on cable configuration

## General Specifications


Connector A, quantity	1
Color, boot A	Gray
Color, connector A	Green
Connector B, quantity	8
Color, boot B	Blue
Color, connector B	Blue
Construction Type	Stranded
Furcation Color	Yellow
Interface, Connector A	MPO-08/APC Male
Interface, Connector B	LC/UPC
Interface Feature, connector B	Uniboot
Jacket Color	Yellow
Polarity	Method B Enhanced (ULL)
Fibers per Subunit, quantity	8
Total Fibers, quantity	8

## Dimensions

# U4GQXLUT8

Breakout Length	22 in
Cable Assembly Length Range (m)	3 – 305
Cable Assembly Length Range (ft)	10 – 999

## Ordering Tree

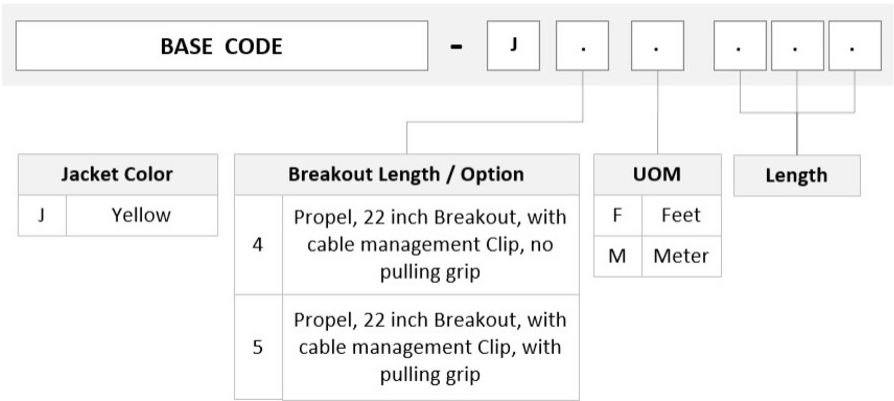

## Mechanical Specifications

Cable Retention Strength, maximum	11.24 lb @ 0 °   4.40 lb @ 90 °
-----------------------------------	---------------------------------

## Optical Specifications

Fiber Mode	Singlemode
Fiber Type	G.657.A2, TeraSPEED®

## Environmental Specifications

Operating Temperature	-10 °C to +60 °C (+14 °F to +140 °F)
EN50575 CPR Cable EuroClass Fire Performance	B2ca
Environmental Space	Dual Rated LSZH/Riser   Indoor

## Regulatory Compliance/Certifications

Agency	Classification
ANATEL	Compliant
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>


# U4GQXLUT8

ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



## Included Products

760254313	–	Fiber indoor cable, Low Smoke Zero Halogen Riser MPO Trunk with 2.0 mm Subunits, 8 fiber,
N-008-MP-8G1-F08YL/20T/B2		Singlemode G.657.A2/B2, Feet jacket marking, Yellow jacket color, B2ca flame rating
860658160	–	LC/UPC Uniboot Connector, Singlemode, Blue
860659022	–	MPO-08, ULTRA LOW LOSS, MALE, Singlemode, GREEN, 2mm

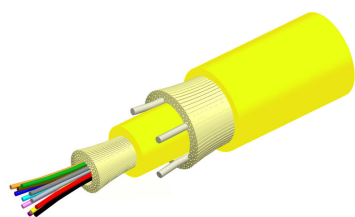

Fiber indoor cable, Low Smoke Zero Halogen Riser MPO Trunk with 2.0 mm Subunits, 8 fiber, Singlemode G.657.A2/B2, Feet jacket marking, Yellow jacket color, B2ca flame rating

Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA
Portfolio	CommScope®
Product Type	Fiber indoor cable
Product Series	N-MP

General Specifications

Cable Type	MPO trunk cable
Construction Type	Non-armored
Subunit Type	Gel-free
Jacket Color	Yellow
Jacket Marking	Feet
Subunit, quantity	1
Total Fiber Count	8

Dimensions

Buffer Tube/Subunit Diameter	2 mm   0.079 in
Diameter Over Jacket	5.3 mm   0.209 in

Mechanical Specifications

Minimum Bend Radius, loaded	80 mm   3.15 in
Minimum Bend Radius, unloaded	53 mm   2.087 in
Tensile Load, long term, maximum	133 N   29.9 lbf
Tensile Load, short term, maximum	445 N   100.04 lbf
Compression	10 N/mm   57.101 lb/in

# 760254313 | N-008-MP-8G1-F08YL/20T/B2

<b>Compression Test Method</b>	FOTP-41   IEC 60794-1 E3
<b>Flex</b>	25 cycles
<b>Flex Test Method</b>	FOTP-104   IEC 60794-1 E6
<b>Impact</b>	2.94 N-m   26.021 in lb
<b>Impact Test Method</b>	FOTP-25   IEC 60794-1 E4
<b>Strain</b>	See long and short term tensile loads
<b>Strain Test Method</b>	FOTP-33   IEC 60794-1 E1
<b>Twist</b>	10 cycles
<b>Twist Test Method</b>	FOTP-85   IEC 60794-1 E7
<b>Vertical Rise, maximum</b>	412 m   1,351.706 ft

## Optical Specifications

<b>Fiber Type</b>	G.657.A2/B2
-------------------	-------------

## Environmental Specifications

<b>Installation temperature</b>	0 °C to +60 °C (+32 °F to +140 °F)
<b>Operating Temperature</b>	0 °C to +70 °C (+32 °F to +158 °F)
<b>Storage Temperature</b>	-40 °C to +70 °C (-40 °F to +158 °F)
<b>Cable Qualification Standards</b>	ANSI/ICEA S-83-596   Telcordia GR-409
<b>EN50575 CPR Cable EuroClass Fire Performance</b>	B2ca
<b>EN50575 CPR Cable EuroClass Smoke Rating</b>	s1a
<b>EN50575 CPR Cable EuroClass Droplets Rating</b>	d0
<b>EN50575 CPR Cable EuroClass Acidity Rating</b>	a1
<b>Environmental Space</b>	Low Smoke Zero Halogen (LSZH)
<b>Flame Test Method</b>	IEC 60332-3   IEC 60754-2   IEC 61034-2

## Environmental Test Specifications

<b>Low High Bend</b>	0 °C to +70 °C (+32 °F to +158 °F)
<b>Low High Bend Test Method</b>	FOTP-37   IEC 60794-1 E11
<b>Temperature Cycle</b>	0 °C to +70 °C (+32 °F to +158 °F)
<b>Temperature Cycle Test Method</b>	FOTP-3   IEC 60794-1 F1

## Packaging and Weights

# 760254313 | N-008-MP-8G1-F08YL/20T/B2

---

**Cable weight** 33 kg/km | 22.175 lb/kft

\* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable



LC/UPC Uniboot Connector, Singlemode, Blue

Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America
Portfolio	CommScope®
Product Type	Fiber connector

General Specifications

Color, boot	Blue
Color, housing	Blue
Interface	LC/UPC

Dimensions

Length	64 mm   2.52 in
Compatible Cable Diameter	1.6 mm   0.063 in   2 mm   0.079 in

Material Specifications

Ferrule Material	Zirconia
------------------	----------

Mechanical Specifications

Cable Retention Strength, maximum	11.24 lb @ 0 °
-----------------------------------	----------------

Optical Specifications

Fiber Mode	Singlemode
Insertion Loss Change, mating	0.2 dB
Optical Components Standard	ANSI/TIA-568. 3-D   IEC 61753-1
Insertion Loss Change, temperature	0.2 dB
Insertion Loss, ULL, maximum	0.25 dB
Return Loss, minimum	55 dB

Regulatory Compliance/Certifications


Agency	Classification
CHINA-ROHS	Above maximum concentration value
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



\* Footnotes

Insertion Loss Change, mating	TIA-568: Maximum insertion loss change after 500 matings
Insertion Loss Change, temperature	Maximum insertion loss change from -10 °C to +60 °C (+14 °F to +140 °F)





MPO-08, ULTRA LOW LOSS, MALE, Singlemode, GREEN, 2mm

Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America
Portfolio	CommScope®
Product Type	Fiber connector
Product Brand	TeraSPEED®

General Specifications

Color	Green
Color, boot	Black
Ferrule Geometry	Angled
Interface	MPO/APC Male
Interface Feature	Pinned
Total Fiber Count	8

Dimensions

Compatible Cable Diameter	2 mm   0.079 in
---------------------------	-----------------

Material Specifications

Ferrule Material	Polymer
------------------	---------

Optical Specifications

Fiber Mode	Singlemode
Fiber Type	G.657.A2
Optical Components Standard	ANSI/TIA-568-C.3
Insertion Loss, maximum	0.35 dB
Return Loss, minimum	65 dB

Packaging and Weights

Packaging quantity 1

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant

