



Mini-OTE 300-Series, Optical Terminal Enclosure, 4-port prodigy connector, no splitter, black, with grounding, external mounting

- Hardened connectors are factory-terminated and environmentally sealed for use in optical drop cable deployments
- Plug and play adapter ports ensure rapid cable installment in the outside plant access section of the network
- Optical Terminal Enclosures incorporate hardened connector technology that is designed to withstand the rugged outside plant environment
- Accommodates CommScope’s field installable splitters and compact CWDMs
- \*Product as currently available does not comply with the requirements of the Build America, Buy America Act. A new version under the same product number meeting the requirements listed above will be available at a future date.

Product Classification

Regional Availability	Asia   EMEA   Latin America   North America
Product Type	Access terminal, without splitter/tap
Product Series	Mini-OTE 300
Government Requirements	Build America Buy America (BABA) coming soon*

General Specifications


Application	For central core tube ribbon shielded/unshielded fiber cable   For flat drop with/without trace wire fiber cable   For loose buffer tube standard (72 F) and micro (144 F) fiber cable   For round armored up to 0.50 in/12.7 mm diameter fiber cable
Cable Type	No cable (stubless)
Cable, quantity	0
Distribution Type	4 ports
Drop Port Type	Hardened Prodigy SC/APC
Enclosure Color	Black
Location of Manufacturing	Maple Grove, Minnesota
Mounting	Handhole   Pedestal   Pole   Strand
Port Type	Hardened Prodigy SC/APC
Port, quantity	4
Splitter, quantity	0
Stub Type	No tail

# 760256493 | OTE-04MA-NN-EXTG03

## Dimensions

Height	342.9 mm   13.5 in
Width	182.88 mm   7.2 in
Depth	121.92 mm   4.8 in
Cable Length, stub	0 ft (0 m)

## Dimension Drawing

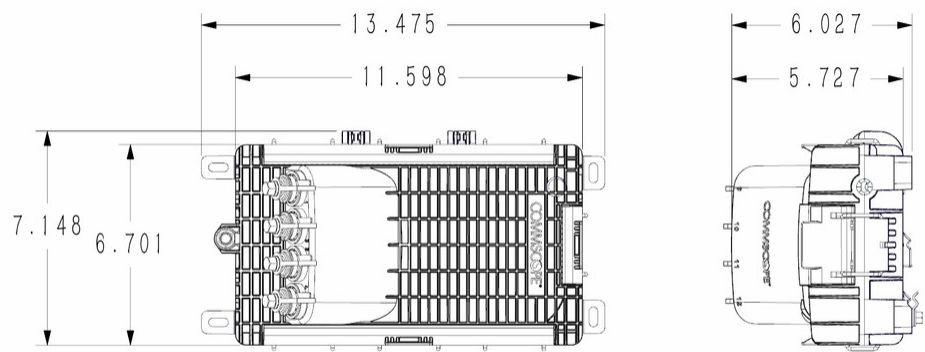

## Ordering Tree

OTE -  M  -  G

Number of ports

02	2 ports
04	4 ports
06	6 ports
08	8 ports
12	12 ports

Type of adapter

H	Full-size
X	DLX miniaturized

Passive optical module options

NN	No splitter
12	1:2 splitter (FBT)
14	1:4 splitter (planar)
18	1:8 splitter (planar)
2C	2 channel CCWDM
4C	4 channel CCWDM
8C	8 channel CCWDM

Number of trays

03	3 trays (standard)— 2 fiber splicing trays, 1 fiber storage tray
----	--

Optional features

EXT	External mounting
##	Starting CCWDM wavelength, 20nm spacing
##A	Starting CCWDM wavelength, skipped channels

Example: OTE-04MX-14-EXTG03

4 Port Mini-OTE with 1x4 splitter, external mounting,  
grounding, 3 trays

## Material Specifications

Enclosure Material TypeEngineered plastic

## Optical Specifications

Operating Wavelength Range1260 – 1635 nm

Attenuation Terminal Connectors, maximum0.4 dB

Insertion Loss, Terminal Connector, typical0.16 dB

Return Loss, Connector, minimum65 dB

## Environmental Specifications

Operating Temperature-40 °C to +60 °C (-40 °F to +140 °F)

Relative Humidity5%–100%, condensing

Environmental SpaceAbove ground | Below ground | Buried

Qualification Standard NoteSee test report CTR-1016 for details and exceptions

Qualification StandardsIEC 60529, IP68 + 2 m waterhead | Telcordia GR-771-CORE, Issue 2

UV ResistanceUV stabilized

## Packaging and Weights

IncludedEnclosure (1) | Gel-sealed input ports for butt applications (4) | Gel-sealed input ports for inline applications (1) | Integrated slack storage tray (1) | Integrated splice tray (2) | Pedestal mounting hardware (1)

Packaging quantity1

Packaging TypeBox | Carton

Weight, without cable2.83 kg | 6.239 lb

## Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



## Included Products

760242289	–	Mini-OTE 300-Series, Optical Terminal Pole Cable Retention
OTE-M-CABLERET		Kit



Mini-OTE 300-Series, Optical Terminal Pole Cable Retention Kit

Product Classification

Regional Availability	North America
Product Type	Mounting bracket
Product Series	Mini-OTE 300

Environmental Specifications

Environmental Space	Outdoor
---------------------	---------

Packaging and Weights

Packaging quantity	5
Packaging Type	Bag   Carton